

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



PANDUIT PART #	WIRE RANGE AWG [mm ²]	TAB SIZE in. [mm]	HOUSING COLOR	MAX WIRE INSULATION DIA. in. [mm]	DIMENSIONS in. [mm]				TOOLS
					L ± .04 [1.1]	W ± .01 [0.3]	C ± .02 [0.4]	M ± .02 [0.6]	
EDV10-250P	#12-10 [4.0-6.0]	.250 X .032 [6.4 X 0.8]	YELLOW	.204 [5.2]	0.94 [24.0]	0.26 [6.6]	0.32 [8.0]	0.51 [13.0]	KST2000C


NOTES:

- USED FOR:
 - STRANDED COPPER WIRE ONLY - INTERNAL WIRING
 - 167°F [75°C] MAX. OPERATING TEMPERATURE
 - 300 V. MAX VOLTAGE RATING
- MATERIAL:
 - STAMPING: .016" [0.4] THICK BRASS, TIN PLATED
 - HOUSING: VINYL
- WIRE STRIP LENGTH: 11/32" $\begin{smallmatrix} +1/32 \\ -0 \end{smallmatrix}$ [8.8mm $\begin{smallmatrix} +0.8 \\ -0 \end{smallmatrix}$]
- SEE www.panduit.com FOR PACKAGE QUANTITIES
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT



LISTED
19X5
E78522

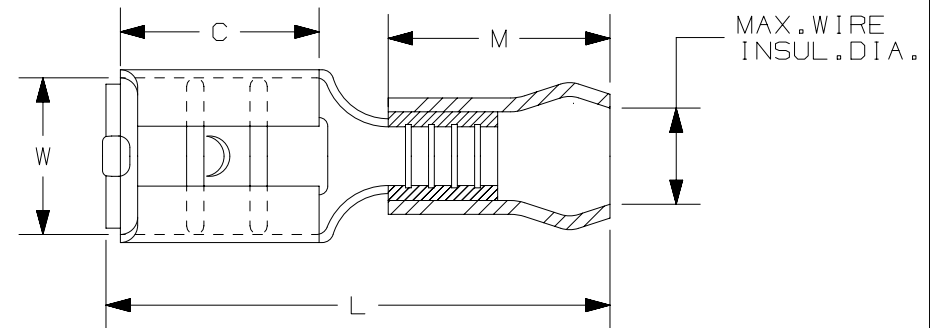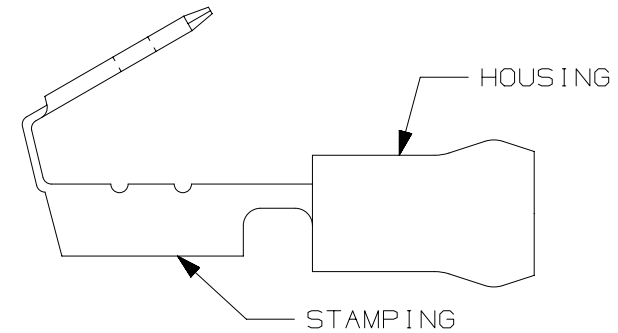

										TITLE STRONGHOLD PIGGYBACK DISCONNECT (250 SERIES) VINYL INSULATED #12-10 AWG CUSTOMER DRAWING				
										ITEM REVISION NAME 00123SSF/00				
										DATASET FILE NAME 00123SSF_DC/00				
										UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °  THIRD ANGLE PROJECTION				
										MATERIAL: SEE NOTES				
00	2/18	JHNU	TMR	RGB	DRAWING RELEASED				00123SS	DRAWING NUMBER: 00123SSF - DC				
REV	DATE	BY	CHK	APR	DESCRIPTION			ECN	DRAWN BY JHNU	DATE -	CHK -	SCALE N.T.S.	SHT 1 OF 1	SIZE A