

## General-Purpose Cable Ties and Accessories

### Cable Tie Mounting Bases

- ¾" and 1" mounts for use with 18# through 50# tensile cable ties
- Supplied on rubber-based adhesive
- Available in 6.6 natural nylon and 6.6 black weather-resistant nylon
- UL94V-2 flammability (clip)

**Note:** See product expiration date on package. Periodically check product for adhesion and replace as needed. Product is for wire management only and is not intended for use as a primary support of wire, cable, etc.



CAT. NO.	MOUNT METHOD	COLOR	PKG. QTY.
<b>¾" x ¾" Sizes</b>			
MPNY-750-9-C	Synthetic Rubber Adhesive	Natural	100
MPNY-750-9-D	Synthetic Rubber Adhesive	UV Black	500
<b>1" x 1" Sizes</b>			
MPNY-1000-9-C	Synthetic Rubber Adhesive	Natural	100
MPNY-1000-9-D	Synthetic Rubber Adhesive	UV Black	100

For use with 18–50 lb. Cable Ties


– Mounting Surface should be cleaned with alcohol based (IPA) cleaner before application

– Allow 15 minutes setup for maximum performance

Accepts cable ties up to 50-lb. tensile strength!

### Adhesive Mounting Cradle

- Supplied on closed cell foam with synthetic rubber-based adhesive
- Use #6 self-tapping screw for added strength if desired

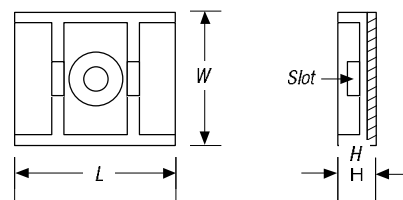

STD. PKG. CAT. NO.	BULK PKG. CAT. NO.	MATERIAL	H HEIGHT IN./MM	L LENGTH IN./MM	W WIDTH IN./MM	SLOT HEIGHT IN./MM	SLOT WIDTH IN./MM	MOUNT METHOD	STD. PKG. QTY.	BULK PKG. QTY.
MCNY-1250-9-C	MCNY-1250-9-D	Natural Nylon 6.6	.285/7.24	1.250/31.75	1.000/25.4	.090/2.29	.300/7.62	SRA Adhesive*	100	500


\*Synthetic Rubber Adhesive

**Note:** See product expiration date on package. Periodically check product for adhesion and replace as needed. Product is for wire management only and is not intended for use as a primary support of wire, cable, etc.

## General-Purpose Cable Ties and Accessories

### Two-Way Screw Mount

- SMNY-000 accepts 18 lb. (80N) tensile strength cable ties (miniature)
- SMNY-001 accepts up to 50 lb. (222N) tensile strength cable ties

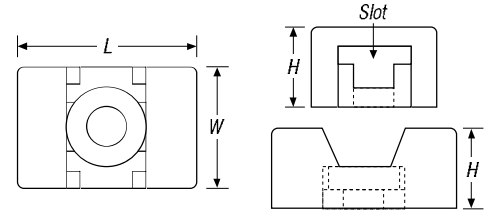


BULK PKG. CAT. NO.	MATERIAL	H HEIGHT IN./MM	L LENGTH IN./MM	W WIDTH IN./MM	SLOT HEIGHT IN./MM	SLOT WIDTH IN./MM	MOUNT METHOD	BULK PKG. QTY.
SMNY-000-9-D	Natural Nylon 6.6	.27/6.86	.57/14.48	.34/8.64	.07/1.78	.12/3.10	#4 Screw	500
SMNY-001-9-D	Natural Nylon 6.6	.25/7.11	.60/15.24	.38/9.77	.06/1.52	.20/5.68	#6 or #8 screw	500

*SMNY series for use in temperatures ranging from -40° F to 221° F (-40° C to 105° C).*

### Four-way screw mount for cable ties up to 50-lb. (222N) tensile strength!

#### Four-Way Mount

- Mount with #6 or #8 screws
- Available in 6.6 natural nylon

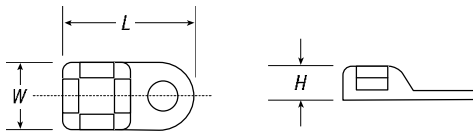

BULK PKG. CAT. NO.	H IN./MM	L IN./MM	W IN./MM	SLOT W IN./MM	MOUNT SCREW	BULK PKG. QTY.
SMNY-220-9-D	.23/5.84	.95/25.13	.50/12.70	.22/5.59	#6, #8	500

• Natural nylon color.  
For use in temperatures ranging from -40° F to 185° F (-40° C to 85° C).



### STRONG — up to 50-lb. tensile strength!

#### Push Mounts

- PMNY-185**
- Versatile push mount for cable ties to 50-lb. tensile strength
  - For use in .187"/.192" mounting hole for panel thickness .030" to .080"
- PMNY-245**
- Accepts cable ties to 50-lb. tensile (miniature through standard)
  - For use in .250" mounting hole for maximum panel thickness of .062"


BULK PKG. CAT. NO.	MATERIAL	H HEIGHT IN./MM	L LENGTH IN./MM	W WIDTH IN./MM	SLOT HEIGHT IN./MM	BULK PKG. QTY.
PMNY-185-9-D	Nylon	.64/16.26	.43/10.92	.07/1.65	.07/1.65	500
PMNY-254-9-C	Nylon	.36/9.02	.32/8.13	.05/1.27	.22/5.59	100
PMNY-245-9-D	Nylon	.36/9.02	.32/8.13	.05/1.27	.22/5.59	500

• Natural nylon color.  
For use in temperatures ranging from -40° F to 185° F (-40° C to 85° C).

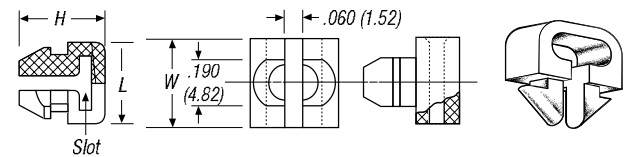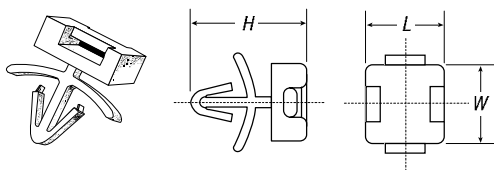

#### Snap Mounts

- For panel thicknesses from .060" to .150" to hold separate pieces of material together
- For MSNY-166-0-M used with W4 or N4 Series Cable Clamps, allowable panel thickness is .030" to .050"
- For MSNY-187-0-M used with W6 or N6 Series Cable Clamps, allowable panel thickness is .030" to .050"

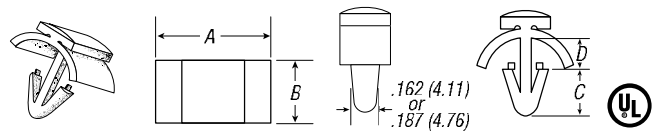

CAT. NO.	MATERIAL	A IN./MM	B IN./MM	C IN./MM	D IN./MM	BULK PKG. QTY.
MSNY-166-0-M	UV Black Nylon	.49/12.45	.31/7.87	.28/7.11	.18/4.57	1,000
MSNY-187-0-M	UV Black Nylon	.625/15.87	.343/8.73	.281/7.14	.210/5.33	1,000