




Catamount®

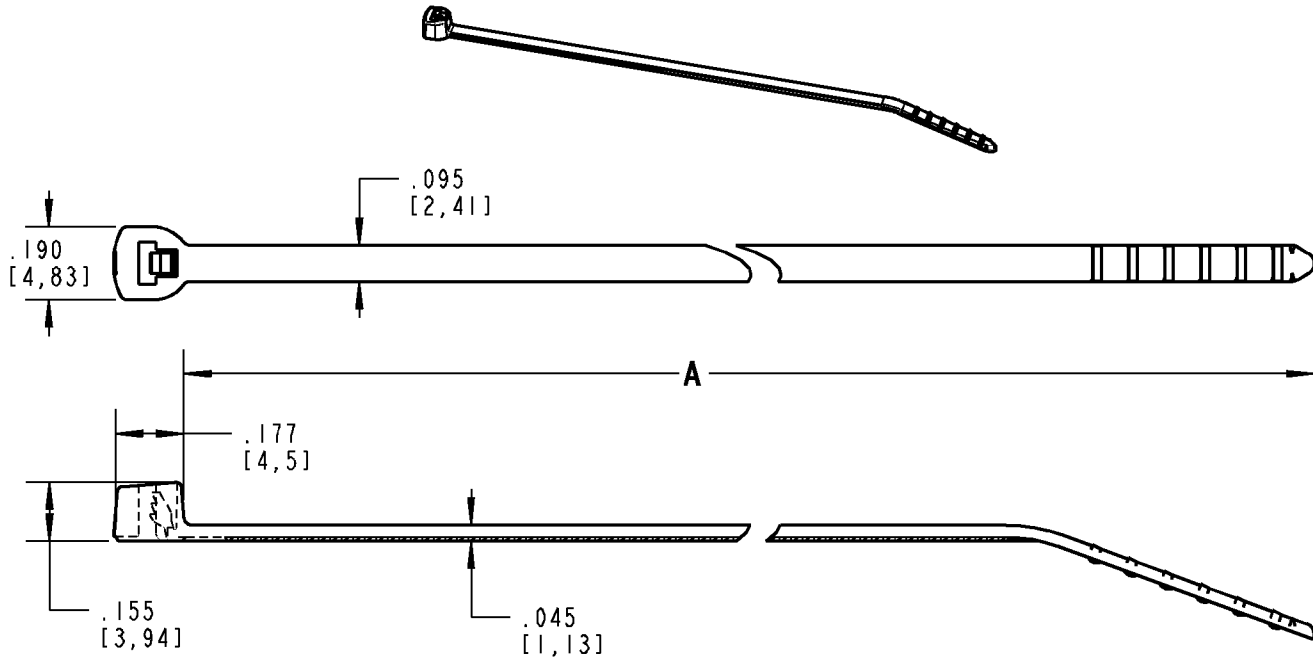

NOTES:


1. MATERIAL: HEAT STABILIZED NYLON 6,6
2. FLAMMABILITY: UL94V-2
3. OPERATING TEMPERATURE RANGE: -40°F [-40°C] TO 221°F [105°C]
4. MINIMUM TENSILE RATING: 18 LBS [80 N]
5. MINIMUM WIRE BUNDLE: .0625 [1,59]
6. MAXIMUM WIRE BUNDLE: SEE TABLE
7. INSTALLATION TOOL/SETTING: WT199/1-3 (MS90387-1) OR ERG299/1-3

CATALOG NUMBER	MAXIMUM WIRE BUNDLE	A
L-4-18HS-***	.625 [15,88]	3.940 [100,08]
L-6-18HS-***	1.500 [38,1]	6.123 [155,52]

* = COLOR CODE- 0= BLACK (OUTDOOR)
9= NATURAL

** = PACKAGING- C= STD PKG (100) M= BULK PKG (1,000)

CONSULT CUSTOMER SERVICE FOR PACKAGE QUANTITY AVAILABILITY

GENERAL NOTES		 www.tnb.com			
1. ALL DIMENSIONS ARE FOR REFERENCE ONLY. 2. DIMENSIONS IN BRACKETS [] ARE IN METRIC UNITS.					
REVISIONS		ORIGINAL PROJECT NO / (ERN NO)	SHEET NO:	REV. NO:	DRAWING NO:
- SEE ERN (****) FOR APPROVAL SIGNATURES & RELEASE DATE. PROJECT NO: ****		FMM01182 / (2006127)	1 OF 1	-	WSD-000225