
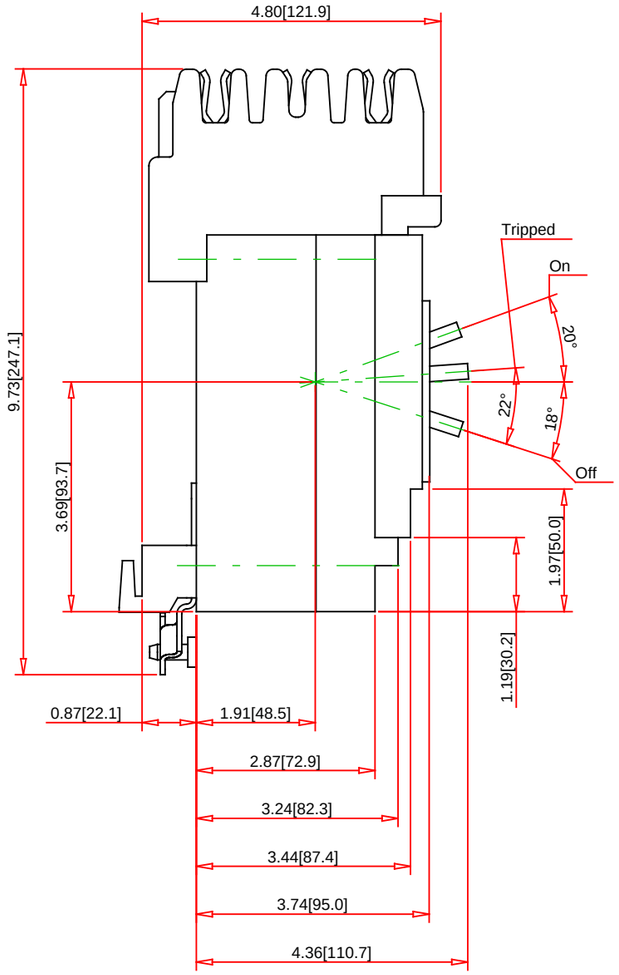


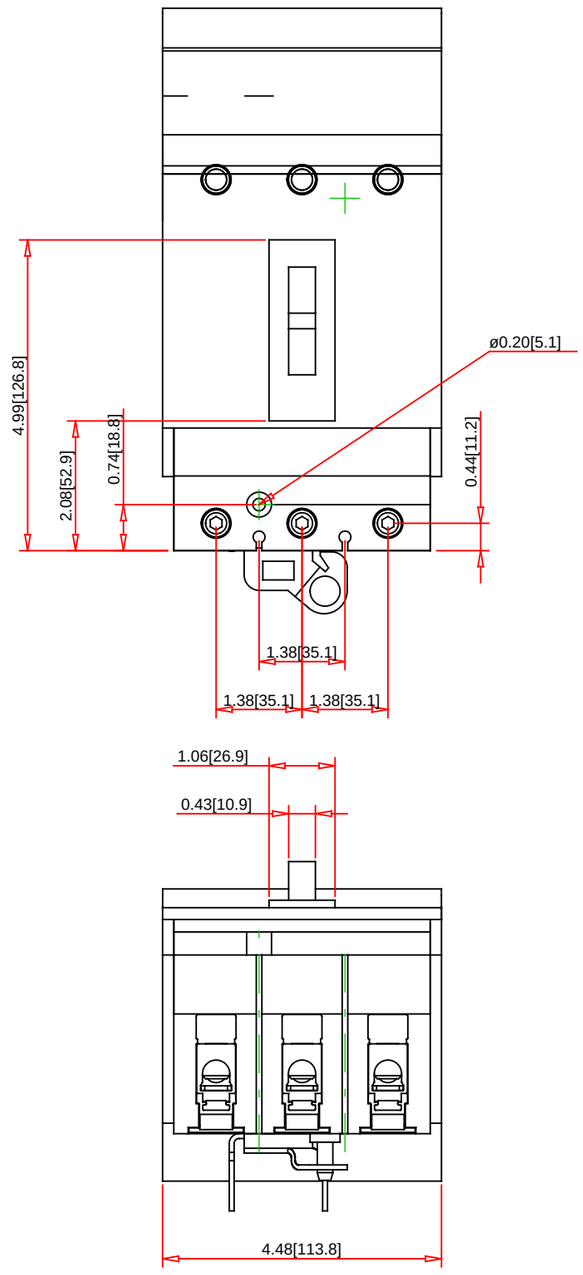

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

HDA360706

SQUARE D by Schneider Electric

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone:+1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:

General Application:	Provides overload and short circuit protection
For Use With:	I-line Panelboards and Switchboards
Approvals:	UL Listed - CSA Certified - IEC Rated
Mounting Type:	I-Line Plug-On
Terminal Type:	I-Line Connection (ON end) - Lugs (OFF end)
Wire Size:	#14-3/0 AWG(Al/Cu)
Weight:	5 Pounds
Mounting Height:	4.5 Inches

Specification:

Description:	PowerPact H-frame Thermal Magnetic Circuit Breaker
Number of Poles:	3-Pole
Ampere Rating:	70A
Voltage Rating:	600VAC
Interrupting Rating:	25kA at 240VAC - 18kA at 480VAC - 14kA at 600VAC
Fixed AC Magnetic Trip:	Hold: 800A - Trip: 1450A
Phase Connection:	CBA