


Note:  
- Drawings Not To Scale  
- Drawings Subject to Change Without Notice  
- Dimensions are inches next to [Millimeters]

Part No.:  
**HJA260254**

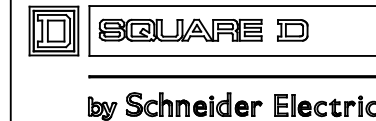

Schneider Electric United States  
North American Division  
Boston One Campus  
800 Federal Street  
Andover, MA 01810, USA  
Phone: +1 8773425173  
Email: CCC@us.schneider-electric.com

Technical Information:

General Application: Provides overload and short circuit protection  
For Use With: I-line Panelboards and Switchboards  
Approvals: UL Listed - CSA Certified - IEC Rated  
Mounting Type: I-Line Plug-On  
Terminal Type: I-Line Connection (ON end) - Lugs (OFF end)  
Wire Size: #14-3/0 AWG(Al/Cu)  
Weight: 5 Pounds  
Mounting Height: 4.5 Inches

Description: PowerPact H-frame Thermal Magnetic Circuit Breaker  
Number of Poles: 2-Pole  
Ampere Rating: 25A  
Voltage Rating: 600VAC  
Interrupting Rating: 100kA at 240VAC - 65kA at 480VAC - 25kA at 600VAC  
Fixed AC Magnetic Trip: Hold: 350A - Trip: 750A  
Phase Connection: BC

Specification: