
HUBBELL
Power Systems, Inc.

# Stud Connector, Bronze

By ANDERSON
Catalog # DSC06025163

"Bolted Stud Connectors, Connecting Stud to Cable, Stud Dia./Thd.-1-1/2"-12, Copper Conductor Range- Cable- 1/0-Sol.-500-MCM,Dia-0.325"-0.813", Material: Castings-Bronze Alloy, Hardware-Silicon Bronze or Stainless Steel"

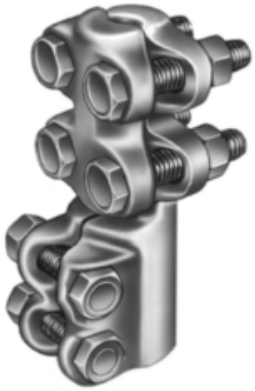

*Representative Image

## Features

- "To specify 90 degree connector, insert "90" into catalog number. Example: DSC0602590163
- All sizes furnished with reversible cable caps"

## General

| | |
|---|---|
| EU RoHS Indicator | No |
| Material | Bronze |
| Material - Clamping Hardware | Stainless Steel |
| Number of Ground Braid Lug Holes | 0 |
| Number of Stud Threads | 16 |
| Type | Stud to Cable |
| UPC | 096359300540 |

## Dimensions

| | |
|---|---|
| Angle - Stud to Conductor | 180 ° |
| Base Hole Spacing | 0 in |
| Diameter - Base Holes | 0 in |
| Diameter - Bolt | 0 in |
| Diameter - Inside | 0 in |
| Diameter - Stud | 3.75 in |
| Length - Coupling | 0 in |
| Length Before Compression | 0 in |
| Weight | 1.960 lb |

## Electrical Ratings

| | |
|---|---|
| Maximum Current Rating Amps Continuous | 0 |

## Conductor Related

| | |
|---|---|
| Conductor Diameter - Maximum | 0.575 in |
| Conductor Diameter - Minimum | 0.204 in |
| Conductor Diameter Range | 0.204 - 0.575 |
| Conductor Type | Copper |

## Product Assets

Catalogs - Substation Connectors (SA)
Sales Drawings - C-2888 (DSC Product Family)
Video - Hubbell Power Systems 3D Portal to help with developing 3D models of substation connector products (VI05050E0619)
Video - Hubbell Power Systems Quick Ship (VI05124E1018)



©2023 Hubbell Incorporated. All rights reserved.