
HUBBELL
Power Systems, Inc.

# Tee, Bronze Bolted

By ANDERSON
Catalog # SF2B2

"Bolted Tees, Connecting Cable Main to Cable Tap, Cable Main- 1/0 Sol.-500 MCM, Dia.- 0.325”-0.813”, Cable Tap- # 6 Sol.-2/0 Str., Dia.-0.162”-0.419”, Material: Castings- Bronze Alloy, Hardware-Silicon Bronze or Stainless Steel"

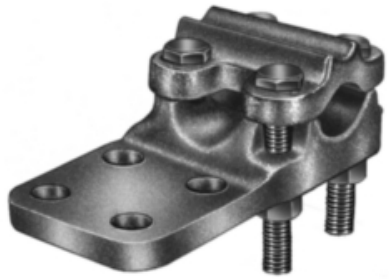

*Representative Image

## Features

- "Reversible cap accommodates a wide range of conductor sizes
- Conductor can enter straight or at 90 degrees to pad"

## General

| | |
|---|---|
| EU RoHS Indicator | No |
| Material | Bronze |
| Material - Clamping Hardware | Stainless Steel |
| Number of Bolt Holes | 2 |
| Number of Ground Braid Lug Holes | 0 |
| Number of Pad Holes | 2 |
| Type | Bolted Tees |
| UPC | 096359325802 |

## Dimensions

| | |
|---|---|
| Base Hole Spacing | 0 in |
| Diameter - Base Holes | 0 in |
| Diameter - Bolt | 0 in |
| Diameter - Inside | 0 in |
| Length - Coupling | 0 in |
| Length Before Compression | 0 in |
| Weight | 4.900 lb |
| Width - Flat Bar Tap | 2 in |

## Electrical Ratings

| | |
|---|---|
| Maximum Current Rating Amps Continuous | 0 |

## Conductor Related

| | |
|---|---|
| Conductor Diameter (Main) - Maximum | 1.315 in |
| Conductor Diameter (Main) - Minimum | 0.54 in |
| Conductor Diameter (Main) Range | 0.54 - 1.315 |
| Conductor Diameter - Maximum | 1.412 in |
| Conductor Diameter - Minimum | 0.522 in |
| Conductor Diameter Range | 0.522 - 1.412 |
| Conductor Type | • Copper Bus<br>• Copper |

## Logistics

| | |
|---|---|
| Pallet Quantity | 216 |

## Product Assets

Catalogs - Substation Connectors (SA)
Sales Drawings - C-4129 (SF Product Family)
Video - Hubbell Power Systems 3D Portal to help with developing 3D models of substation connector products (VI05050E0619)
Video - Hubbell Power Systems Quick Ship (VI05124E1018)



©2023 Hubbell Incorporated. All rights reserved.