


Eaton HM60060-2MW12

Catalog Number: HM60060-2MW12

Eaton Bussmann series HM power distribution fuse block, Multi-wire line-side lug, 60 A, 2P, Class H|Class-K, Black, Box Lug, 10 kA, 75 °C, DIN rail|Panel, 600 V, #2-8 AWG Al|#2-14 AWG Cu

General specifications

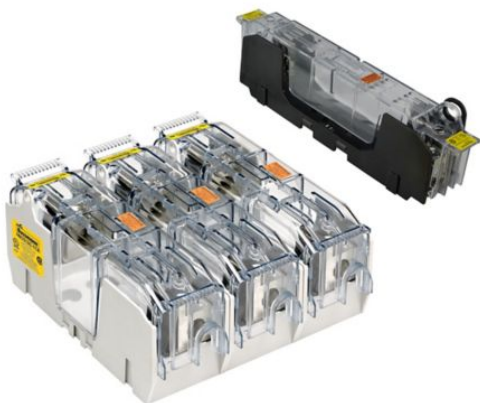

Product Name

Eaton Bussmann series HM power distribution fuse block

Catalog Number

HM60060-2MW12

UPC

051712620482

Product Length/Depth

6.8 in

Product Height

2.6 in

Product Width

3.1 in

Product Weight

0.5225 lb

Warranty

Not Applicable

Compliances

RoHS Compliant

Certifications

ARO

European Pressure Equipment Directive (PED) 97 /23 EC

Electrical rating

Amperage Rating

60 A

Impulse withstand voltage

10 kA RMS symmetrical

Interrupt rating

10 kAIC

Short-circuit rating

10 kA RMS symmetrical

Torque rating

50 lb-in maximum

Voltage rating

600 V

Physical details

Color

Black

Conductor material rated for

Both

Conductor type

Stranded

Fuse type

Class H

Class K

Number of Poles

Two-pole

Operating temperature - max

120 °C

Operating temperature - min

120 °C

Wire size

#2-14 AWG Cu

#2-8 AWG Al

General information

Connection

Box lug

Mounting method

DIN rail

Panel

Special features

Multi-Wire Line-Side Lug

Resources

Catalogs

[Bussmann series complete full line catalog no. 1007](#)

[HM60060-2MW12-FUSE BLK, H 600V 60A 2P](#)

Multimedia

[Class H\(K\), J and R Power distribution fuse block overview](#)

[Bussmann series Fuseology](#)

Specifications and datasheets

[Eaton Specification Sheet - HM60060-2MW12](#)



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com
© 2024 Eaton. All Rights Reserved.

Eaton is a registered trademark.

All other trademarks are
property of their respective
owners.



Eaton.com/socialmedia