


Eaton HM60060-3MW12

Catalog Number: HM60060-3MW12

Eaton Bussmann series HM power distribution fuse block, Multi-wire line side lug, 60 A, 3-P, 120°C, Class H|Class K, Black, Box lug, 10 kA, 75°C, Panel|DIN Rail, 600 V, #2-8 AWG Al|#2-14 AWG Cu

General specifications

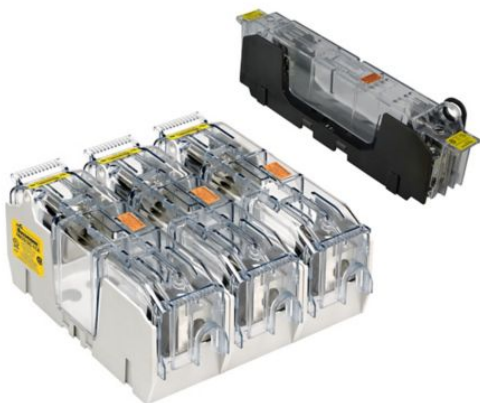

Product Name

Eaton Bussmann series HM power distribution fuse block

Catalog Number

HM60060-3MW12

UPC

051712620499

Product Length/Depth

6.8 in

Product Height

2.6 in

Product Width

4.6 in

Product Weight

0.78375 lb

Warranty

Not Applicable

Compliances

RoHS Compliant

Certifications

ARO
European Pressure Equipment Directive
(PED) 97 /23 EC

Electrical rating

Amperage Rating

60 A

Impulse withstand voltage

10 kA RMS symmetrical

Interrupt rating

10 kAIC

Short-circuit rating

10 kA RMS symmetrical

Torque rating

50 lb-in maximum

Voltage rating

600 V

Physical details

Color

Black

Conductor material rated for

Both

Conductor type

Stranded

Fuse type

Class H

Class K

Number of Poles

Three-pole

Operating temperature - max

120 °C

Operating temperature - min

120 °C

Wire size

#2-8 AWG Al

#2-14 AWG Cu

General information

Connection

Box lug

Mounting method

Panel

DIN rail

Special features

Multi-Wire Line-Side Lug

Resources

Catalogs

Bussmann series complete full line catalog no. 1007

HM60060-3MW12-FUSE BLK, H 600V 60A 3P

Multimedia

Class H(K), J and R Power distribution fuse block overview

Bussmann series Fuseology

Specifications and datasheets

Eaton Specification Sheet - HM60060-3MW12



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com
© 2024 Eaton. All Rights Reserved.

Eaton is a registered trademark.

All other trademarks are
property of their respective
owners.



[Eaton.com/socialmedia](https://www.eaton.com/socialmedia)