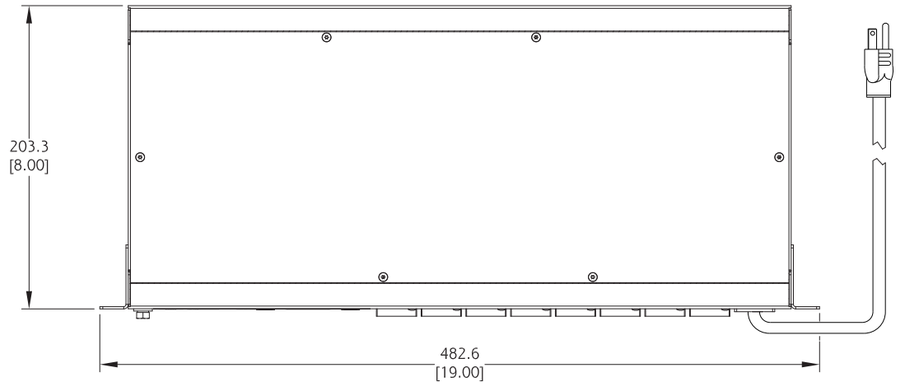

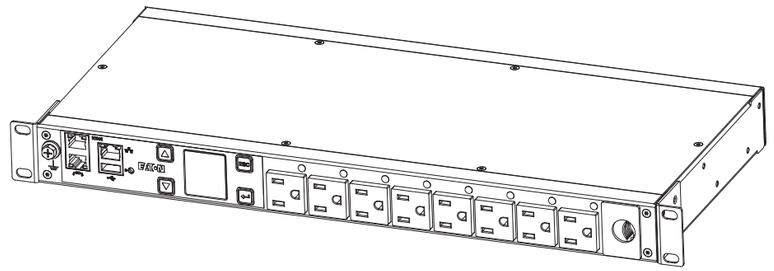

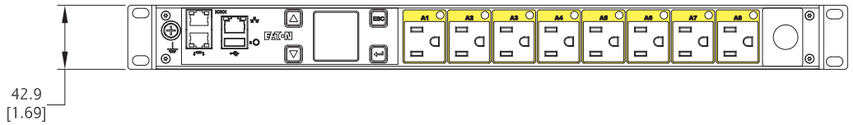

EMAT08-10
G3 MANAGED

FUNCTIONALITY CURRENT, POWER AND ENERGY METERING FOR INPUT AND OUTLET; OUTLET SWITCHING	INPUT NEMA 5-15 PLUG 10FT 14AWG / 3C POWERCORD	OUTPUT (8) NEMA 5-15 R	OPERATING TEMPERATURE 32° TO 140° F 0° TO 60° C
MECHANICAL 19.00" (482.6mm) WIDTH 1.69" (42.9mm) HEIGHT 8.00" (203.3mm) DEPTH BLACK CHASSIS	INPUT RATING 100-127V ~ W + N + PE 12A 50/60Hz	OUTPUT RATING 100-127V ~ 12A PER 5-15 12A MAX TOTAL	CERTIFICATIONS c UL us LISTED
CIRCUIT BREAKERS NONE	FILTER AND SPIKE/SURGE NONE	ACCESSORIES INCLUDED SPK021 - INSTALLATION INCLUDED SPK013 - NETWORK OPTIONAL EMP001 - ENVIRONMENTAL PROBE	CONFIGURATION EMA6MA15ALA13AC SERIAL NUMBER _624____



METRIC	THIRD PROJECTION	EATON CORPORATION, ELECTRICAL	SIZE: D
DESCRIPTION: ePDU G3 SPECIFICATION DRAWING FOR EMAT08-10			
MODIFIED BY: RANK CHUANG	DATE: 9 MAR 2016	UNLESS OTHERWISE SPECIFIED TOLERANCES ON DIMENSIONS ARE: ANGLES: ±1/2° DECIMALS: 0.X: ±0.75 X. (FOR X < 3): ±1 HOLES: ⌀±0.13 0.XX: ±0.25 X. (FOR X > 3): ±2.5 DIMENSIONS ARE IN MILLIMETERS (INCHES) AND AFTER PLATING	SCALE: 0.5 DO NOT SCALE DRAWING OR CHANGE MANUALLY
ECO: NA	STATE: RELEASE		
PRO-ENGINEER GENERATED		PART NAME: EMA6MA15ALA13AC REVISION: 00	SHEET: 1 OF 1

EATON CORPORATION - CONFIDENTIAL AND PROPRIETARY NOTICE TO PERSONS RECEIVING THIS DOCUMENT AND/OR TECHNICAL INFORMATION THIS DOCUMENT, INCLUDING THE DRAWING AND INFORMATION CONTAINED THEREON, IS CONFIDENTIAL AND IS THE EXCLUSIVE PROPERTY OF EATON CORPORATION, AND IS MERELY ON LOAN AND SUBJECT TO RECALL BY EATON AT ANY TIME. BY TAKING POSSESSION OF THIS DOCUMENT, THE RECIPIENT ACKNOWLEDGES AND AGREES THAT THIS DOCUMENT CANNOT BE USED IN ANY MANNER ADVERSE TO THE INTERESTS OF EATON, AND THAT NO PORTION OF THIS DOCUMENT MAY BE COPIED OR OTHERWISE REPRODUCED WITHOUT THE PRIOR WRITTEN CONSENT OF EATON. IN THE CASE OF CONFLICTING CONTRACTUAL PROVISIONS, THIS NOTICE SHALL GOVERN THE STATUS OF THIS DOCUMENT. © 2008 Eaton Corporation - All Rights Reserved.