


L6-20P

EMAT10-10 G3 MANAGED

FUNCTIONALITY	INPUT	OUTPUT	OPERATING TEMPERATURE
CURRENT, POWER AND ENERGY METERING FOR INPUT AND OUTLET; OUTLET SWITCHING	C20 INLET 10FT ADAPTER TO L6-20P	(8) IEC 60320 C13 GRIP	UL: 32° TO 140° F(0° TO 60° C) CE/DEMKO: 32° TO 131° F(0° TO 55° C)
MECHANICAL	INPUT RATING	OUTPUT RATING	CERTIFICATIONS
19.00" (482.6mm) WIDTH 1.69" (42.9mm) HEIGHT 8.00" (203.3mm) DEPTH BLACK CHASSIS	100-240V ~ 2W + PE 16A 50/60Hz	100-240V ~ 10A PER C13 16A MAX TOTAL	
CIRCUIT BREAKERS	FILTER AND SPIKE/SURGE	ACCESSORIES	CONFIGURATION
NONE	NONE	INCLUDED SPK021 - INSTALLATION INCLUDED SPK013 - NETWORK OPTIONAL EMP001 - ENVIRONMENTAL PROBE	EMA6CCAAABB13AC SERIAL NUMBER _626_

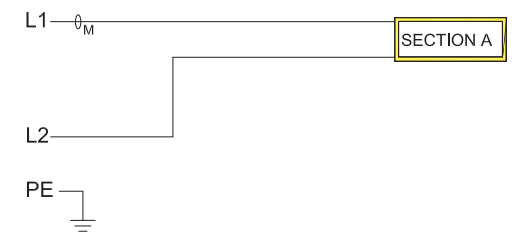

METRIC	EATON CORPORATION, ELECTRICAL	EATON	
DESCRIPTION: ePDU G3 SPECIFICATION DRAWING FOR EMAT10-10			
DESIGNED BY: RANK CHUANG	DATE: 9 MAR 2016	UNLESS OTHERWISE SPECIFIED TOLERANCES ON DIMENSIONS ARE: ANGLES: $\pm 0.1^\circ$ DECIMALS: 0.X, (FOR X < 3) ± 0.1	SCALE: 0.5 DO NOT SCALE DRAWING OR CHANGE MANUALLY
ECO: NA	STATE: RELEASE	HOLE: ± 0.13 DIA: ± 0.25 X, (FOR X > 3) ± 0.3 DIMENSIONS ARE IN MILLIMETERS (INCHES) AND AFTER PLATING	
PRO-ENGINEER GENERATED	PART NAME: EMA6CCAAABB13AC	REVISION: 00	SHEET: 1 of 1