


Eaton C25DND225C-GL

Catalog Number: C25DND225C-GL

Eaton definite purpose contactor, Mounting plate, Quick, 25A, Pressure plate quick connect (side-by-side), 277 Vac, 60 Hz, Open with metal mounting plate, 15-50A, two- and three-pole, Contactor, Two-pole, Global listed, D1, Scre

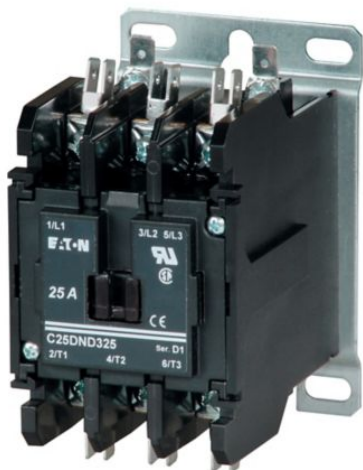

General specifications

Product Name	Catalog Number
Eaton definite purpose contactor	C25DND225C-GL
UPC	Product Length/Depth
786685695310	3.35 in
Product Height	Product Width
3.75 in	2.4 in
Product Weight	Warranty
1.19 lb	Eaton Selling Policy 25-000, one (1) year from the date of installation of the Product or eighteen (18) months from the date of shipment of the Product, whichever occurs first.
Compliances	Certifications
CE Marked RoHS Compliant	UL Listed file E1491 (Guide Number NLDX2) CSA Certified

defaultTaxonomyAttributeLabel

Accessories

Mounting plate

Amperage Rating

25A

Number Of Poles

Two-pole

Options

Global listed

Type

Non-reversing

Auxiliary contacts

Pressure plate quick connect (side-by-side)

Coil voltage

440-480 Vac, 50/60 Hz

Enclosure

Open with metal mounting plate

Frame size

15-50 A, two-pole and three-pole

Inductive full load

25 A

Model

Contactor

Series

D1

Terminals

Screw

Connection

Quick

Resources

Catalogs

Eaton's Volume 5—Motor Control and Protection

Drawings

C25DND2 2D Drawing Xchange

C25DND2 3D Model Xchange

C25DND2 2D PDF

C25DND2 AutoCAD 2D Footprint (mm)

C25DND2 3D Inventor

C25DND2 AutoCAD 2D Footprint

Specifications and datasheets

Eaton Specification Sheet - C25DND225C-GL



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com
© 2024 Eaton. All Rights Reserved.

Eaton is a registered trademark.

All other trademarks are
property of their respective
owners.



[Eaton.com/socialmedia](https://www.eaton.com/socialmedia)