


Eaton D8PR7TEA

Catalog Number: D8PR7TEA

D8 General Purpose Plug-In Relay, E-bracket mount, QTY: 1, 120V coil, 5260 Ohms resistance, DPST-NO contact configuration, Silver alloy contacts, 25A, 220V rated load, 25A amperage rating, 250V max. operating voltage

General specifications

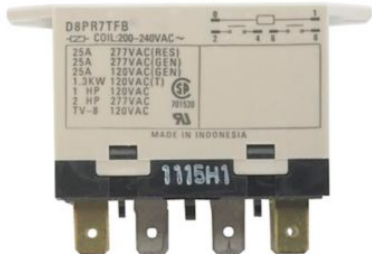

Product Name

Eaton General-purpose relay

UPC

782114161197

Product Height

2.09 in

Product Weight

0.1 lb

Compliances

CE Marked

Catalog Number

D8PR7TEA

Product Length/Depth

2.07 in

Product Width

1.32 in

Warranty

Eaton Selling Policy 25-000, one (1) year from the date of installation of the Product or eighteen (18) months from the date of shipment of the Product, whichever occurs first.

Certifications

UL Listed file E1491
cRUus
CSA file No. LR701520

Catalog Notes

Consult sales office or customer support center for additional coil voltages

defaultTaxonomyAttributeLabel

Type

General-purpose relay

Amperage Rating

25A

Mounting

E-bracket

Prod load

25A, 220V

Coil voltage

120 V

Contact configuration

DPST: NO

Contact material

Silver alloy

Quantity

1

Resistance

5260 Ω

Series

D8

Voltage - max

250 V

Resources

Catalogs

Eaton's Volume 7—Logic Control, Operator Interface and Connectivity Solutions

Specifications and datasheets

Eaton Specification Sheet - D8PR7TEA



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com
© 2024 Eaton. All Rights Reserved.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.



Eaton.com/socialmedia