SIEMENS

Data sheet 3RW3346-0EC34

Electronic motor control unit Values at 55 °C Standard: 80 A Inside-delta: 156 A 200-460 V AC, 115 V AC Attention, not generally available, customer-specific product!

General technical data	
product brand name	SIRIUS
product feature	
● integrated bypass contact system	No
product function	
● motor overload protection	Yes
● evaluation of thermistor motor protection	No
reference code according to EN 61346-2	Q
Power Electronics	
operating voltage at standard circuit rated value	200 ... 460 V
Ambient conditions	
derating temperature	40 °C


Approvals Certificates

Environment	General Product Approval	EMV	Test Certificates	other	
Environmental Confirmations	EAC	KC	Special Test Certificate	Confirmation	产品合格 QC PASS

Further information

Simulation Tool for Soft Starters (STS)
https://support.industry.siemens.com/cs/ww/en/view/101494917
Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/ic10
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW3346-0EC34
Cax online generator
https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW3346-0EC34
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3RW3346-0EC34
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW3346-0EC34&lang=en

Subject to change without notice
© Copyright Siemens

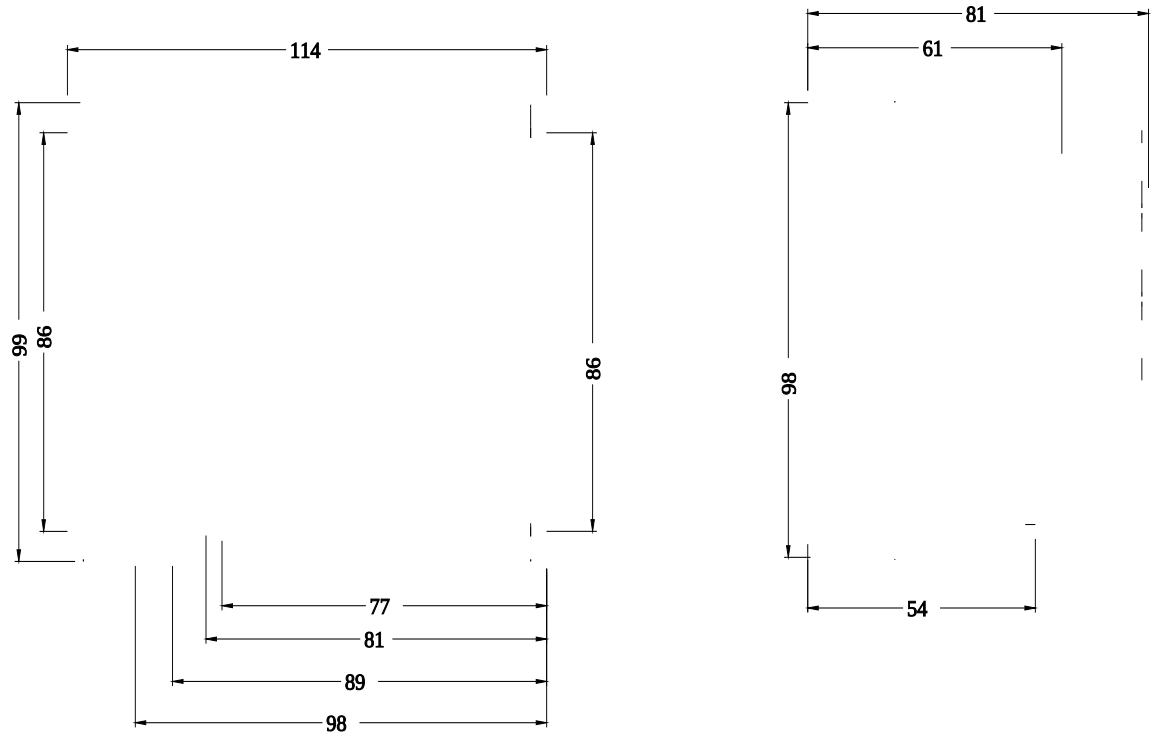

last modified: 4/4/2025

Subject to change without notice
© Copyright Siemens