

PVC COATED CONDUIT BODIES - LB FORM 7

Features:


- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- Specialized corrosion resistant coating provided on threads
- Sizes available are $\frac{1}{2}$ " to 4"
- Fittings are supplied with plastic encapsulated stainless steel screws

Applications:

Allied Tube & Conduit® offers the full line of Form 7 PVC Coated Conduit Bodies. All fittings are supplied with PVC coated cast iron covers. The sleeved threaded ends offer complete protection against corrosion while maintaining full ground continuity throughout the installed system.

Standards:

- UL Standard 514B
- CSA Standard: C22.2 No. 18

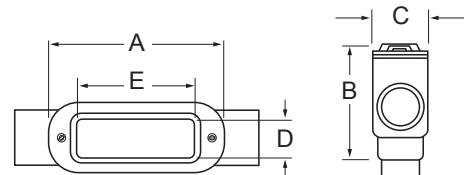

Part Number	Trade Size (in)	Metric Size (mm)	A (in)	B (in)	C (in)	D (in)	E (in)	Weight / 100 (lbs)
PV0500LB17	$\frac{1}{2}$	16	5.10	2.29	1.42	0.94	3.19	110
PV0700LB27	$\frac{3}{4}$	21	5.98	2.54	1.60	1.13	3.81	170
PV1000LB37	1	27	7.01	2.92	1.79	1.38	4.50	220
PV1200LB47	$1\frac{1}{4}$	35	7.79	3.35	2.23	1.75	5.00	310
PV1500LB57	$1\frac{1}{2}$	41	8.67	3.73	2.48	1.94	5.44	380
PV2000LB67	2	53	10.17	4.29	3.04	2.44	6.38	520
PV2500LB777	$2\frac{1}{2}$	63	12.54	5.17	4.29	3.56	8.38	1000
PV3000LB87	3	78	12.54	5.92	4.29	3.56	8.38	1300
PV3500LB97	$3\frac{1}{2}$	91	14.73	6.60	5.29	4.50	10.25	1900
PV4000LB107	4	103	14.73	7.10	5.29	4.50	10.25	1850

All dimensions are for informational purposes only *Tolerances +/- 5%



For more info visit allieddeg.us