

PVC COATED CONDUIT BODIES - LL FORM 7

Features:


- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- Specialized corrosion resistant coating provided on threads
- Sizes available are $\frac{1}{2}$ " to 4"
- Fittings are supplied with plastic encapsulated stainless steel screws

Applications:

Allied Tube & Conduit® offers the full line of Form 7 PVC Coated Conduit Bodies. All fittings are supplied with PVC coated cast iron covers. The sleeved threaded ends offer complete protection against corrosion while maintaining full ground continuity throughout the installed system.

Standards:

- UL Standard 514B
- CSA Standard: C22.2 No. 18

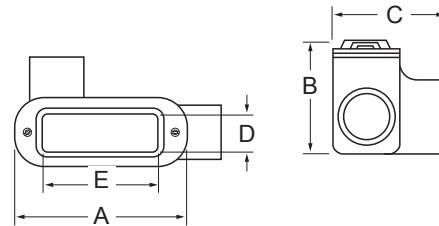

Part Number	Trade Size (in)	Metric Size (mm)	A (in)	B (in)	C (in)	D (in)	E (in)	Weight / 100 (lbs)
PV0500LL17	$\frac{1}{2}$	16	5.10	1.42	2.29	0.94	3.19	120
PV0700LL27	$\frac{3}{4}$	21	5.98	1.67	2.48	1.13	3.81	160
PV1000LL37	1	27	7.04	1.92	2.49	1.38	4.50	210
PV1200LL47	$1\frac{1}{4}$	35	7.79	2.35	3.23	1.75	5.00	300
PV1500LL57	$1\frac{1}{2}$	41	8.67	2.60	3.60	1.94	5.44	410
PV2000LL67	2	53	10.17	3.17	4.17	2.44	6.38	570
PV2500LL777	$2\frac{1}{2}$	63	12.54	3.67	5.79	3.56	8.38	1000
PV3000LL87	3	78	12.54	4.42	5.79	3.56	8.38	1270
PV3500LL97	$3\frac{1}{2}$	91	14.73	4.92	6.98	4.50	10.25	1900
PV4000LL107	4	103	14.73	5.42	6.98	4.50	10.25	1900

All dimensions are for informational purposes only *Tolerances +/- 5%



For more info visit allieddeg.us