

Technical Specifications (continued)**Construction****Size:**
1'x2'**Shape:**
Rectangle**Finish:**
White**Enclosure Material:**
Metal**Trim Style:**
Smooth**Lens:**
Polycarbonate light diffuser distributes light evenly and smoothly for general lighting applications**Compliance****Listings:**
UL Listed**Environment:**
Suitable for use in indoor applications in dry and damp environments**IC Rated:**
No**Air Tight:**
No**Energy Star Approved:**
This product is ENERGY STAR® Version 2.2 Certified**Energy Star ID:**
2396877**Certification Model Number:**
DLS0164(SMPFA1x2RT22UNVTW)**T20 Compliant:**
Can be used to conform with the requirements of California Title 20**California Title 24 JA8 Compliant:**
Can be used to conform with the requirements of California Title 24 Part 6**California Energy Commission (CEC) Status:**
Lawful for Sales in California**NEC Compliant:**

Suitable for use in closets. Compliant with NEC Sec. 410.16 (A)(1) and 410.16 (C1).

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

RoHS:

Mercury and UV free. RoHS-compliant components.

FCC:

Complies with Part 15B of the FCC Rules

Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act


Other**Warranty:**RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.**Note:**

All values are typical (tolerance +/- 10%)

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

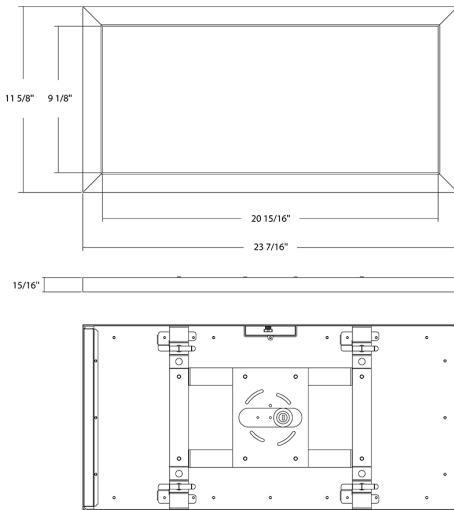

Features

- Select from 5 field-adjustable color temperatures 2700K, 3000K, 3500K, 4000K, or 5000K
- Suitable for indoor applications in dry and damp environments
- Dimmable, see Dimmer Compatibility List
- Meets California Title 24 requirements
- 50,000 life hours
- 5-Year, no compromise warranty

Ordering Matrix

Family	Size/Shape	Wattage	CRI/Color Temp	Voltage/Dimming	Finish
SMPFA	1X2RT	22		UNVT	W
	1X1S = 1' X 1' Square	20 = 20W	Blank = 90 CRI, 2700/3000/3500/4000/5000K CCT Adjustable	UNVT = 120-277V, TRIAC	W = White
	1X2RT = 1' X 2' Rectangle	22 = 22W			
	1X4RT = 1' X 4' Rectangle	45 = 45W			