

Specifications

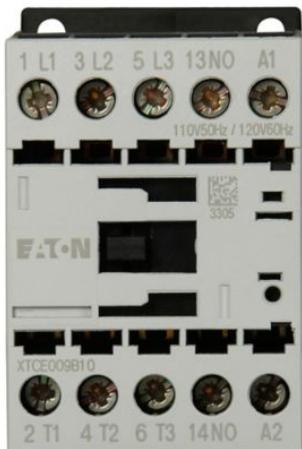


Photo is representative



Eaton XTCE009B10B

Eaton XT IEC contactor, 9A, 220 Vac 50 Hz, 240 Vac 60 Hz, 1NO, 9A, Frame B, 45 mm, 50-60 Hz, 0.5, 1, 1.25/ 3, 3, 5, 7.5 hp (1/3PH @115, 200, 230/200, 230, 460, 575 V), Three-pole, Screw terminals, Full voltage non-reversing contactor

General specifications

PRODUCT NAME	Eaton XT IEC contactor
CATALOG NUMBER	XTCE009B10B
EAN	4015082766894
PRODUCT LENGTH/DEPTH	3 in
PRODUCT HEIGHT	2 in
PRODUCT WIDTH	3 in
PRODUCT WEIGHT	0.5 lb
COMPLIANCES	CE Marked RoHS Compliant
CERTIFICATIONS	UL Listed CSA Certified IEC 60947 EN 60947
CATALOG NOTES	Screw terminals (6-65A); 5 mm (80-150A); no lugs (185-2000A)



Powering Business Worldwide

Product specifications

AMPERAGE RATING	9A
HP RATING - MAX	0.5, 1, 1.25/ 3, 3, 5, 7.5 hp (1/3PH @115,200,230/200,230,460,575 V)
NUMBER OF POLES	Three-pole
TYPE	Full voltage non-reversing contactor
FREQUENCY RATING	50-60 Hz
FRAME SIZE	45 mm
TERMINALS	Screw terminals
COIL VOLTAGE	220-240 Vac, 50/60 Hz
CONTACT CONFIGURATION	1 NO
CONTINUOUS AMPERE RATING	9 A
SERIES	XT IEC
OPERATION	Non-reversing

Resources

CATALOGS

[Motor Control and
Protection, IEC Contactors
and Starters, Volume 5,
Tab 1](#)

SPECIFICATIONS AND DATASHEETS

[Eaton Specification Sheet -
XTCE009B10B](#)

PROJECT NAME:

PROJECT NUMBER:

PREPARED BY:

DATE:



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2025 Eaton. All Rights Reserved.

Follow us on social media to get the
latest product and support
information.

