
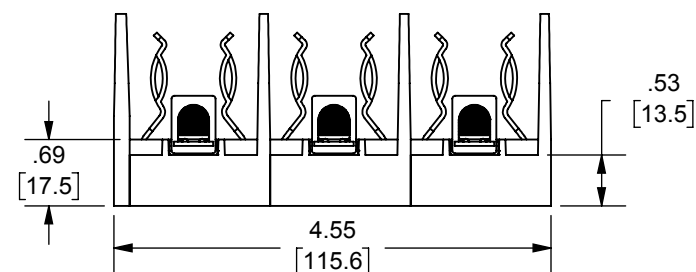
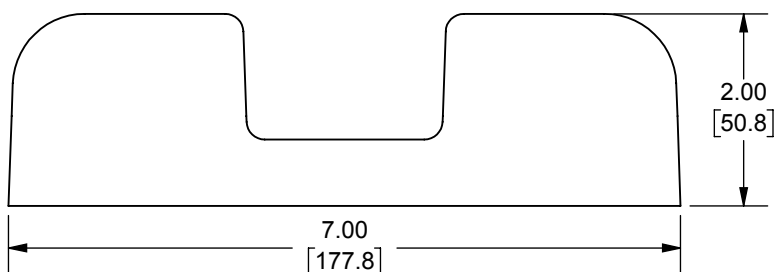


REV.	DATE	ECO	DESCRIPTION	BY	CK	APP
-	1/16/20	N/A	REDRAWN	GDR	N/A	N/A

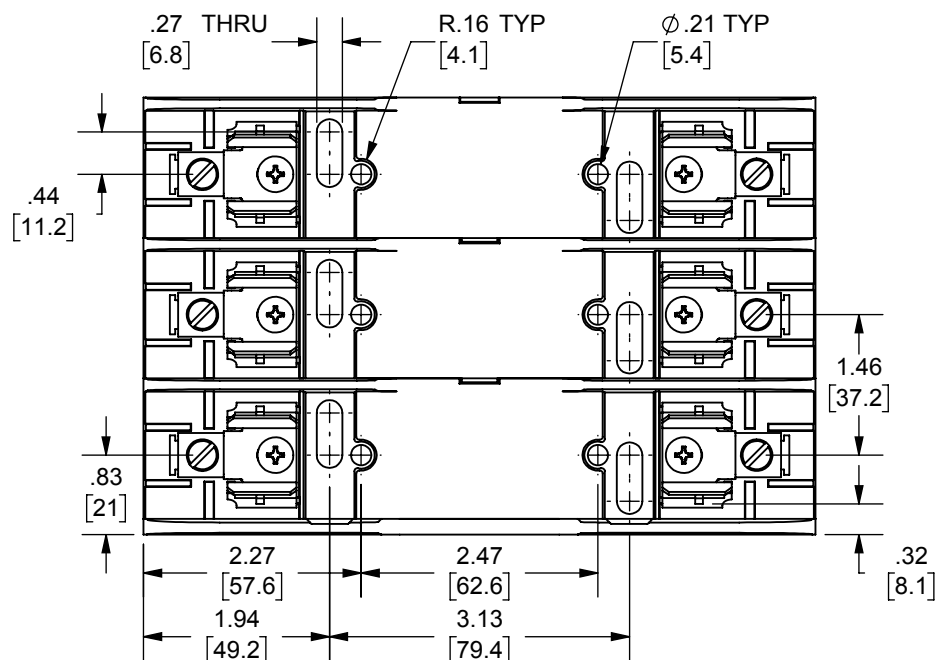

P/N		FUSE CLASS	RMS SYM RATING	TORQUE (IN-LBS)	WIRE		UL		CSA
					°C	TYPE	FILE NO.	GUIDE NO.	REPORT NO.
60603	2	H, K	10K	45	60/75	CU-AL	E52283	IZLT	LR32169
60608	3	H, K	10K	45	60/75	CU-AL			
60658	3	H, K	10K	45	60/75	CU ONLY			
60608R		R	200K	45	60/75	CU-AL			
60658R		R	200K	45	60/75	CU ONLY			

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL COMPOSITION AND RATING: THERMOPLASTIC-125°C RTI
- 2 OMIT SPRING AND REJECTION.
3 OMIT REJECTION.

P/N 60603

P/N 60608 (R) (SPRF)

P/N 60658R (R) (SPRF)

ADD "R" FOR CLASS R

DIMENSIONS IN [] ARE MILLIMETERS

mercen

MERSEN USA NEWBURYPORT-MA, LLC
374 MERRIMAC STREET
NEWBURYPORT, MA 01950

60603, 60608(R) (SPRF), 60658(R) (SPRF)

FUSE BLOCK, 3P BOX CONNECTOR

60A 600V

OUTLINE DIMENSIONS
NOT TO BE USED FOR PRODUCTION

05B0332

SHEET 1 OF 1

PRODUCT MANAGER

SIGN: D.VANGARI

DATE: 1/28/2020

DESIGN ENGINEER

SIGN: M.RADZIM

DATE: 1/28/2020