PASS & SEYMOUR®

PlugTail® Spec Grade Self-Test GFCIs 15 & 20A, 125VAC



PT2097TRFTW

Twice the Power: ground fault protection and PlugTail productivity.

PT1597TRFT, PT2097TRFT, PT2097NTLTR, PT1597NA, PT2097NA, PT2097TRNA

Pass & Seymour's PlugTail® GFCI receptacle line is designed for fast, consistent installation using PlugTail® wiring connectors.

All models accept standard 3-wire PlugTail connectors, with select models supporting the 5-wire connector for feed-through wiring applications. Plugtail simplifies installation across commercial and residential installs and supports Legrand's commitment to code-compliant, contractor-friendly solutions.

Features & Benefits

Patented SafeLock® Protection – if critical components are damaged and ground fault protection is lost, power to the receptacle is disconnected.


Zinc-plated steel mounting strap.

The indicator light flashes if the device fails the self-test, signalling that the GFCI should be replaced.

The most durable GFCI available. Exceeds UL943 voltage surge requirements.

Tamper-resistant automatic shutter system prevents young children from inserting common household objects.

High-impact-resistant, thermoplastic construction for superior strength and durability.

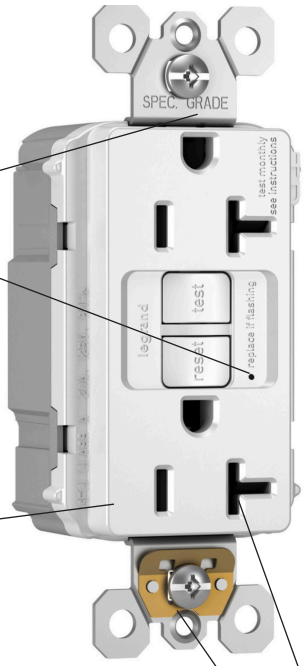

Meets Federal Specification requirements and 2015 UL requirements.

PT2097TRFTW

Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.

Select models accept a 5-wire plugtail connector for feed-through wiring while remaining compatible with standard 3-wire tails.

Large crimped and welded brass contacts snugly terminate on device blade terminals. Audible snapping latch assures connection, allows release.

Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger-safe housing.



PTRA6STR



PTRA6SOL5W 5-Wire Connector

No exposed terminals create a finger-safe application before, during, and after installation.


Auto-ground clip assures a positive ground to metal box.

Compliance

cULus Listed File Number E42190 and E140596, Standard UL498 Attachment Plugs and Receptacles, UL943 GFCIs. Federal Specification WC596. Standard CSA C22.2 No. 42 General Use Receptacles, CSA C22.2 No. 144 GFCIs. Conforms to NEMA WD-1 and WD-6.

Technical Information

Performance	
Electrical	
Dielectric Voltage	Withstands 1500V minimum
Trip Level	4 to 6 mA
Trip Time	.025 Second Nominal
Frequency	60 Hz
Maximum Working Voltage	125VAC
Voltage Range	102-132VAC
Mechanical	
PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only
Product Identification	Ratings are a permanent part of the device.
Environmental	
Operating Temperature	-35°C to +66°C
Maximum Humidity	95%
Flammability	UL94 V2
PlugTail™ GFCI Receptacle Materials	
Face	Nylon
Body	Nylon
Contacts	.03" Brass (.8)
Mounting Straps	.05" Zinc-Plated Steel (1.3)
Test/Reset Buttons	Nylon
Nightlight Lens	*Lexan®
Tamper-Resistant Shutter	**Thermoplastic
Plug Tail Connector Materials	
Housing	Polycarbonate
Contacts	.030 Brass

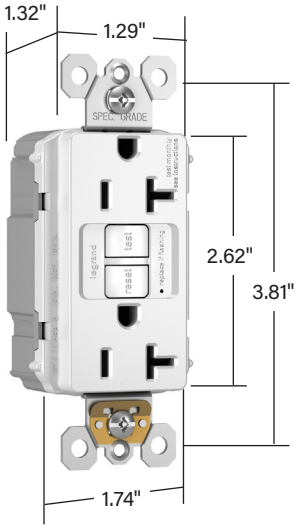



Dimensions for 15 & 20 Amp Feedthrough Receptacle



Warranty

1 Year

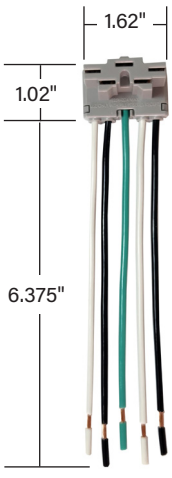

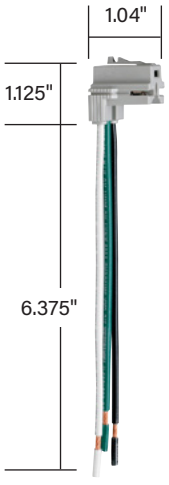



Tamper-Resistant

Ordering Information

GFCI Receptacle Specifications

Catalog Number	Description	Ratings	Colors*	NEMA Config.
PT1597FT*	Spec Grade Duplex GFCI with Feedthrough	15A 125V	I, W, –, GRY, BK, RED, LA	5-15R
PT2097FT*	Spec Grade Duplex GFCI with Feedthrough	20A 125V	I, W, –, GRY, BK, RED, LA	5-20R
PT1597TRFT*	Spec Grade Tamper-Resistant Duplex GFCI with Feedthrough	15A 125V	I, W, –, GRY, BK, RED, LA	5-15R
PT2097TRFT*	Spec Grade Tamper-Resistant Duplex GFCI with Feedthrough	20A 125V	I, W, –, GRY, RED, LA	5-20R
PT2097NTLTR*	Spec Grade Tamper-Resistant Combination Night Light/GFCI	20A 125V	I, W	5-20R
PT1597NA*	USMCA Spec Grade Duplex GFCI	15A 125V	W, GRY, LA	5-15R
PT2097NA*	USMCA Spec Grade Duplex GFCI	20A 125V	W, BK, LA	5-20R
PT2097TRNA*	USMCA Spec Grade Tamper-Resistant Duplex GFCI	20A 125V	I, W, LA	5-20R
PT1597NTLTRNA*	USMCA Spec Grade Tamper-Resistant Combination Night Light/Duplex GFCI	15A 125V	W	5-15R
PT2097NTLTRNA*	USMCA Spec Grade Tamper-Resistant Combination Night Light/Duplex GFCI	20A 125V	I, W	5-20R

Plugtail Connectors

Catalog Number	Description
PTRA6STR	3-wire PT connector stranded
PTRA6SOL	3-wire PT connector solid
PTRA6STR5W	5-wire PT connector stranded
PTRA6SOL5W	5-wire PT connector solid



NEMA 5-15R



NEMA 5-20R

Field Uses/Vertical Markets

- **Industrial**
- **Health Care**
- **Education**
- **Institutional**
- **Retail**
- **Office**
- **Hospitality/Lodging**
- **Multiple Dwelling**

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.

Legrand, North America
60 Woodlawn Street
West Hartford, CT 06110
877-295-3472
www.legrand.us

Canada
844-977-3783
www.legrand.ca

FOLLOW US

CS3431 — May 2026 — For latest specs visit www.legrand.us/passandseymour

©2026 Legrand All Rights Reserved