

PHILIPS

**7.2BR30/COR/930/P/E26/
DIM 6/1FB T20**

929002032104



**CorePro, LEDbulb, BR30, dimmable, 65 W, E26, 3000 K,
650 lm, 15000 hour(s), Plastic**

CorePro, LEDbulb, BR30, dimmable, 65 W, E26, 3000 K, 650 lm, 15000 hour(s), Plastic, 90.00 lm/W

General Information

Cap-Base	E26
Nominal lifetime	15,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LEDbulb

Light Technical

Color Code	930 [CCT of 3000K]
Beam Angle (Nom)	110 degree(s)
Luminous Flux	650 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	90.00 lm/W

Color Consistency	<4
Color rendering index (CRI)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical

Line Frequency	60 Hz
Input Frequency	60 Hz
Power Consumption	7.2 W
Lamp Current (Nom)	82 mA
Wattage Equivalent	65 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.7
Voltage (Nom)	120 V

Temperature

T-Case Maximum (Nom)	75 °C
----------------------	-------

Controls and Dimming

Dimmable	Yes
----------	-----

Mechanical and Housing

Bulb Finish	Frosted
Bulb Material	Plastic
Bulb Shape	BR30
UL Wet/ damp/ dry location	Damp location
Net Weight (Piece)	0.055 kg

Approval and Application

EU RoHS compliant	Yes
T20 compliant	Yes
Ambient temperature range	-20 to +45 °C


Application Conditions

can it be used in closed luminaires	Yes
Wireless Technology	Not applicable

Product Data


Order product name	7.2BR30/COR/930/P/E26/DIM 6/1FB T20
Full product name	7.2BR30/COR/930/P/E26/DIM 6/1FB T20
Order code	929002032104
Material Nr. (12NC)	929002032104
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677545901
Numerator - Packs per outer box	6
EAN/UPC - Case	50046677545906

Dimensional drawing

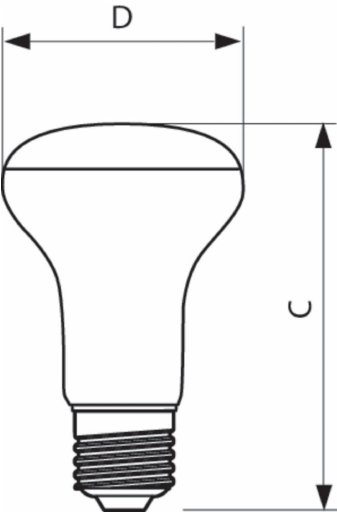


Product	D	C
7.2BR30/COR/930/P/E26/DIM 6/1FB T20	95 mm	132 mm

Photometric data

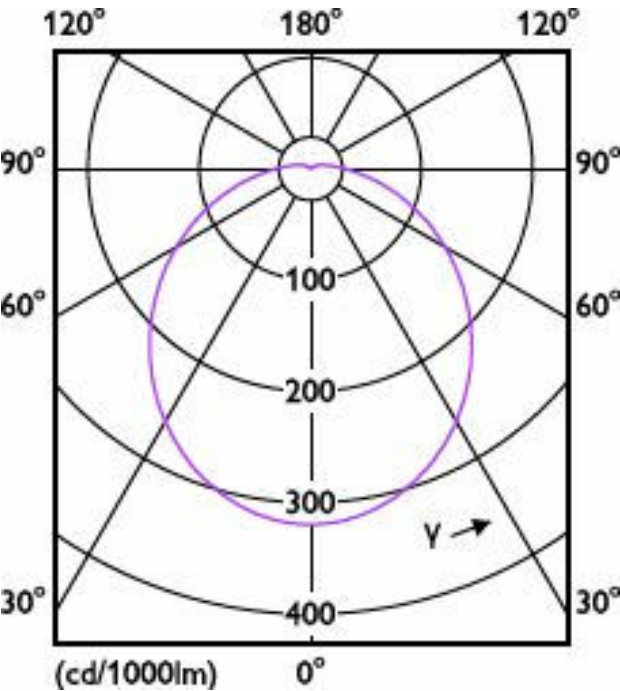


Light Distribution Diagram - 7.2BR30/COR/930/P/E26/DIM 6/1FB T20

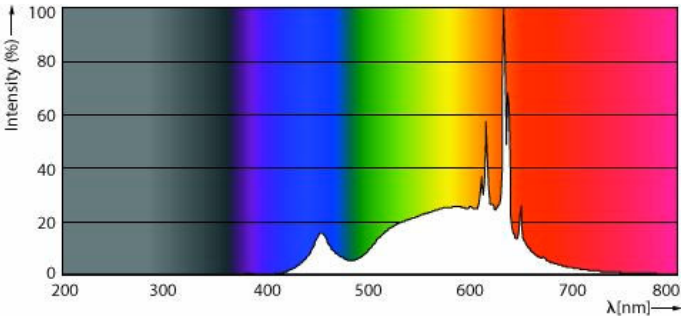


Spectral Power Distribution Colour -
7.2BR30/COR/930/P/E26/DIM 6/1FB T20

Lifetime

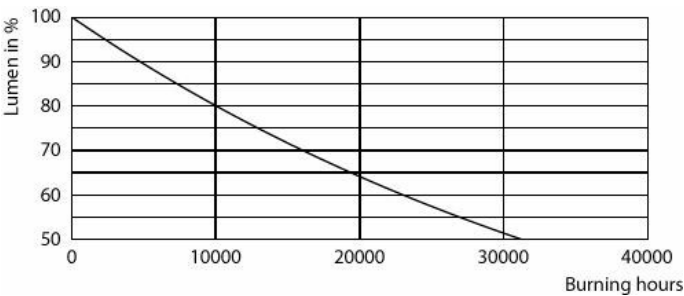

Lumen Maintenance Diagram - 7.2BR30/COR/930/P/E26/DIM 6/1FB T20

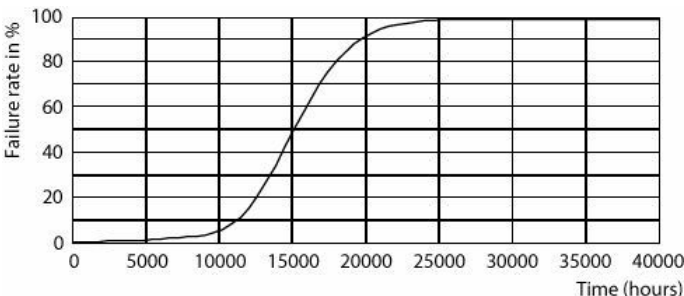

LED Bulbs BR30 120V 19-120W 1200lm 2700K E26 D

Related Documents

Documents and certificates	Document Name	Download
Environmental Product Declaration	Philips-LED-BR30-COMF-7403313-Ref-929001870334-EPD.pdf	Download 
Photometry and lighting design	Document Name	Download
IES File	LED Bulbs_BR30 120V 72-65W 650lm 3000K E26 D-IES.IES	Download 

