Product data sheet

Specifications



Transformer, dry type, DOE 2016, 150kVA, 3 phase, 600V delta primary, 208Y/120V secondary, 22M, 150C rise

EXN150T65H

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range of Product	Square D
Product or Component Type	Transformer
Device short name	DOE 2016
Transformer type	Energy efficient
Device Application	Low voltage electrical distribution

Complementary

Box number	22M
Phase	3 phase
Rated operational power in VA	150 kVA
Network Frequency	60 Hz
Type of cooling	Natural convection
Primary Voltage	600 V delta
Number of tap-offs	2 2.5 % FCAN 4 2.5 % FCBN
Primary operational current	144.34 A 416.36 A 150 kVA
Secondary voltage	208Y/120 V
Coil Material	Aluminium
Basic IMP level (BIL)	10 kV
Temperature Rise	150 °C 220 °C insulated
DOE Efficiency	98.90 % at 35 % load factor , 167 °F (75.0 °C)
Sound Level	44 dB 3 dB NEMA ST-20
%IZ	3.14 %
%IX	2.59 %
X/R Ratio	1.61
Inrush current	1653 A
Let Through Current	13.26 kA
Transformer Losses	301 no load (core loss) 2819 load loss (coil loss)

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Transformer BTU/HR	1294 16.6 % 1628 25 % 3432 50 % 6438 75 % 10646 100 %
Height	40.6 in (1031 mm)
Depth	32.6 in (827 mm)
Width	33.7 in (855 mm)
Product Weight	1002.002 lb(US) (454.50 kg)
Mounting support	Floor Floor, with 7400FMB Ceiling, with 7400CMB22M
Degree of protection	UL type 2 UL type 3R, with 7400WS22M
Electrical connection	4 Hole Nema Pad secondary 0.4 in (11.1 mm) 6 Hole Nema Pad sec - XO 0.4 in (11.1 mm) 2 Hole Nema Pad primary 0.4 in (11.1 mm)
Number of mounting holes	4 Ø: 0.5 in (13 mm)

Environment

Ambient air temperature for operation	104 °F (40 °C)
Average ambient air temperature for operation	30 °C
Standards	UL 1561 CSA C22.2 No 47 NEMA ST-20

Ordering and shipping details

Category	US1PE2X16256
Discount Schedule	PE2X
GTIN	785901435921
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	40.59 in (103.09 cm)
Package 1 Width	33.66 in (85.49 cm)
Package 1 Length	32.6 in (82.7 cm)
Package weight(Lbs)	1221.98 lb(US) (554.28 kg)

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**41 844 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**3 038 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**86 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**37 751 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**970 kg CO2 eq.**
Environmental Disclosure	**Product Environmental Profile**
Declare	**Red list free**

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**Yes**
EU RoHS Directive	**Compliant**
REACh Regulation	**Free of Substances of Very High Concern above the threshold**
California proposition 65	**WARNING: This product can expose you to chemicals including: Phenyl Glycidyl Ether, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**
Halogen content performance	**Halogen free plastic parts product**
PVC free	**Yes**

Use Longer

Lifetime extension

Repair	**No**

Use Again


Repack and remanufacture

Recyclability potential, in %	**95**
Circularity Profile	**No need of specific recycling operations**
Take-back	**No**

WEEE Label	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Technical Illustration

Dimensions

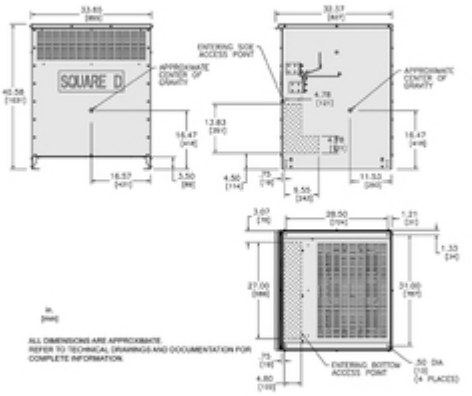

Technical Illustration

Wiring diagram

