Product data sheet

Specifications



Safety switch, double throw, non fusible, 3 pole, 3 wire, 240VAC, 250VDC, 60A, Type 1

DTU322

Product availability: Stock - Normally stocked in distribution facility

Main

Product	Double Throw Safety Switch
Duty Rating	Heavy duty
Disconnect Type	Non-fusible disconnect switch
Factory Installed Neutral	None
Number of Poles	3
Current Rating	60 A
Voltage Rating	240 V AC 250 V DC
Enclosure Rating	NEMA 1
Motor power hp	10 hp at 240 V AC 50-60 Hz for 1 phase motors 15 hp at 250 V AC 50-60 Hz for 3 phase motors 10 hp

Complementary

Short-circuit current	10 kA H or K 200 kA R, J or T
Fuse type	H or K R, J or T
Mounting Type	Surface
Wire Size	AWG 12...AWG 2 aluminium AWG 14...AWG 2 copper
Tightening torque	35 lbf.in (4.0 N.m) 0.003…0.008 in² (2.06…5.26 mm²) (AWG 14...AWG 10) 40 lbf.in (4.5 N.m) 0.01 in² (8.37 mm²) (AWG 8) 45 lbf.in (5.08 N.m) 0.02…0.03 in² (13.3…21.15 mm²) (AWG 6...AWG 4) 50 lbf.in (5.6 N.m) 0.04…0.05 in² (26.67…33.62 mm²) (AWG 3...AWG 2)
Depth	6.93 in (176.02 mm)
Width	11.96 in (303.78 mm)
Height	29.94 in (760.48 mm)
Product Weight	39.00 lb(US) (17.69 kg)

Environment

Certifications	UL Listed

Ordering and shipping details

Category	US10DE100133
Discount Schedule	0DE1
GTIN	785901308362

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Returnability	Yes
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	10.300 in (26.162 cm)
Package 1 Width	12.300 in (31.242 cm)
Package 1 Length	33.300 in (84.582 cm)
Package weight(Lbs)	35.289 lb(US) (16.007 kg)
Unit Type of Package 2	PAL
Number of Units in Package 2	16
Package 2 Height	40.000 in (101.600 cm)
Package 2 Width	40.000 in (101.600 cm)
Package 2 Length	48.000 in (121.920 cm)
Package 2 Weight	564.0002 lb(US) (255.826 kg)

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**200 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**79 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**31 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0.1 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**52 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**38 kg CO2 eq.**
Environmental Disclosure	**Product Environmental Profile**

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**Yes**
EU RoHS Directive	**Compliant**
REACh Regulation	**Free of Substances of Very High Concern above the threshold**
California proposition 65	**WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**

Use Longer

Lifetime extension

Repair	**No**


Use Again

Repack and remanufacture

Recyclability potential, in %	**90**
Circularity Profile	**No need of specific recycling operations**
Take-back	**No**

Technical Illustration


Dimensions

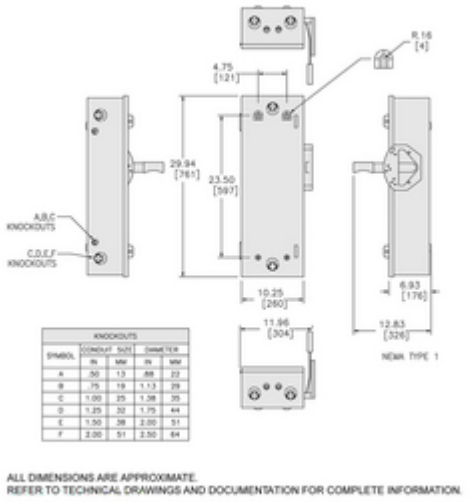

ALL DIMENSIONS ARE APPROXIMATE.
REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.

Technical Illustration

Wiring diagram

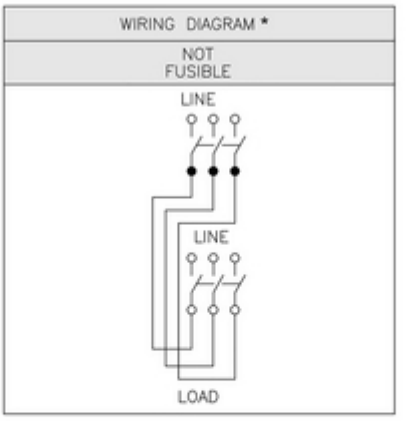

DTU321 DTU362
DTU361 DTU323
DTU322 DTU363

* FIELD CONVERTABLE TO FEED TWO ALTERNATE LOADS FROM A SINGLE SOURCE