Product data sheet

Specifications



Switch, reversing drum, 5 HP at 575 VAC single phase, 7.5 HP at 575 VAC polyphase, handle operated, NEMA 1 enclosure

2601BG1

Product availability: Stock - Normally stocked in distribution facility

Main

Product	Reversing Drum Switch
Enclosure Rating	NEMA 1
Horsepower	1.5 hp 115 V AC, 1 phase 3 hp 230 V AC, 1 phase 5 hp 460 V AC, 1 phase 5 hp 575 V AC, 1 phase 5 hp 200 V AC, 3 phase 5 hp 230 V AC, 3 phase 7.5 hp 460 V AC, 3 phase 7.5 hp 575 V AC, 3 phase 2 hp 115 V DC 2 hp 230 V DC
Maximum Rated Voltage	600 V AC 250 V DC
Number of Poles	3P

Complementary

Certifications	UL Listed CSA
Electrical Connection	Screw-clamp terminals
Type	B
Width	2.68 in (68.07 mm)
Height	5.38 in (136.65 mm)
Depth	4.61 in (117.09 mm)
Product weight	1.34 lb(US) (0.61 kg)

Ordering and shipping details

Category	US10CP121116
Discount Schedule	0CP1
GTIN	785901555438
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	4.7 in (11.9 cm)

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Package 1 Width	5.6 in (14.2 cm)
Package 1 Length	7.09 in (18.0 cm)
Package weight(Lbs)	2.25 lb(US) (1.02 kg)

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**24 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**6 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**0.3 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0.1 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**16 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**2 kg CO2 eq.**
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**Yes**
SCIP Number	**A77dc90b-82ee-4a76-9bcd-15eb48e3d759**
REACh Regulation	Reference contains Substances of Very High Concern above the threshold
California proposition 65	**WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**

Use Longer

Lifetime extension

Repair	**No**


Use Again

Repack and remanufacture

Recyclability potential, in %	**74**
Circularity Profile	**No need of specific recycling operations**
Take-back	**No**
WEEE Label	**The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.**

Dimensions Drawings

Approximate Dimensions

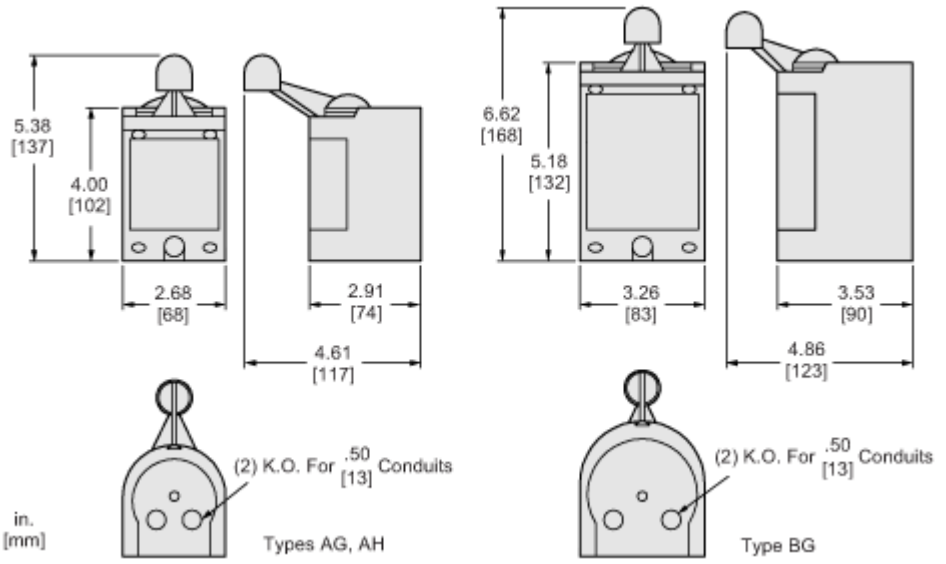

Connections and Schema

Connections and Wiring Diagrams

