

Product data sheet

Specifications

SQUARE D



Contactor, Definite Purpose, 60A,
3 pole, 30HP at 575VAC, 3 phase,
110/120VAC 50/60Hz coil, open

8910DPA63V02

Product availability: Stock - Normally stocked in distribution facility

Main

Product or Component Type	Definite Purpose Contactor
Line Rated Current	60 A
Number of Poles	3P
Pole contact composition	3 NO
Range of Product	DPA

Complementary

Maximum Horse Power Rating	5 hp 115 V AC, 1 phase 10 hp 230 V AC, 1 phase 30 hp 460 V AC, 3 phase 30 hp 575 V AC, 3 phase 25 hp 230 V AC, 3 phase
Locked rotor rated current	360 A 277 V AC 300 A 460 V AC 240 A 575 V AC
[Ue] rated operational voltage	600 V AC
[Uc] control circuit voltage	120 V AC 60 Hz 110 V AC 50 Hz
Phase	3 phase
Electrical Connection	Quick connect terminals Box lugs
Height	4.13 in (104.90 mm) 4.1 in (105 mm)
Width	2.56 in (65.02 mm) 2.6 in (65 mm)
Depth	3.67 in (93.22 mm) 3.7 in (93 mm)
Product Weight	1.50 lb(US) (0.68 kg) 1.5 lb(US) (0.7 kg)

Environment

Product Certifications	UL Recognized CSA
------------------------	----------------------

Ordering and shipping details

Category	US1CP1B21346
Discount Schedule	CP1B
GTIN	785901080817
Returnability	Yes

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Country of origin	CN
-------------------	----

Packing Units

Unit Type of Package 1	PCE
------------------------	-----

Nbr. of units in pkg.	1
-----------------------	---

Package 1 Height	2.900 in (7.366 cm)
------------------	---------------------

Package 1 Width	4.900 in (12.446 cm)
-----------------	----------------------

Package 1 Length	4.100 in (10.414 cm)
------------------	----------------------

Package weight(Lbs)	24.160 oz (684.924 g)
---------------------	-----------------------

Unit Type of Package 2	CAR
------------------------	-----

Number of Units in Package 2	8
------------------------------	---

Package 2 Height	8.100 in (20.574 cm)
------------------	----------------------

Package 2 Width	5.800 in (14.732 cm)
-----------------	----------------------

Package 2 Length	9.000 in (22.860 cm)
------------------	----------------------

Package 2 Weight	12.350 lb(US) (5.602 kg)
------------------	--------------------------

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)


Use Better

Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
SCIP Number	9635bca0-88f5-4211-aaa3-d012e1850a41
EU RoHS Directive	Compliant By Exemption
REACH Regulation	Reference contains Substances of Very High Concern above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including: Cadmium and cadmium compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer


Lifetime extension	
Repair	No

Use Again

Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings

Approximate Dimensions

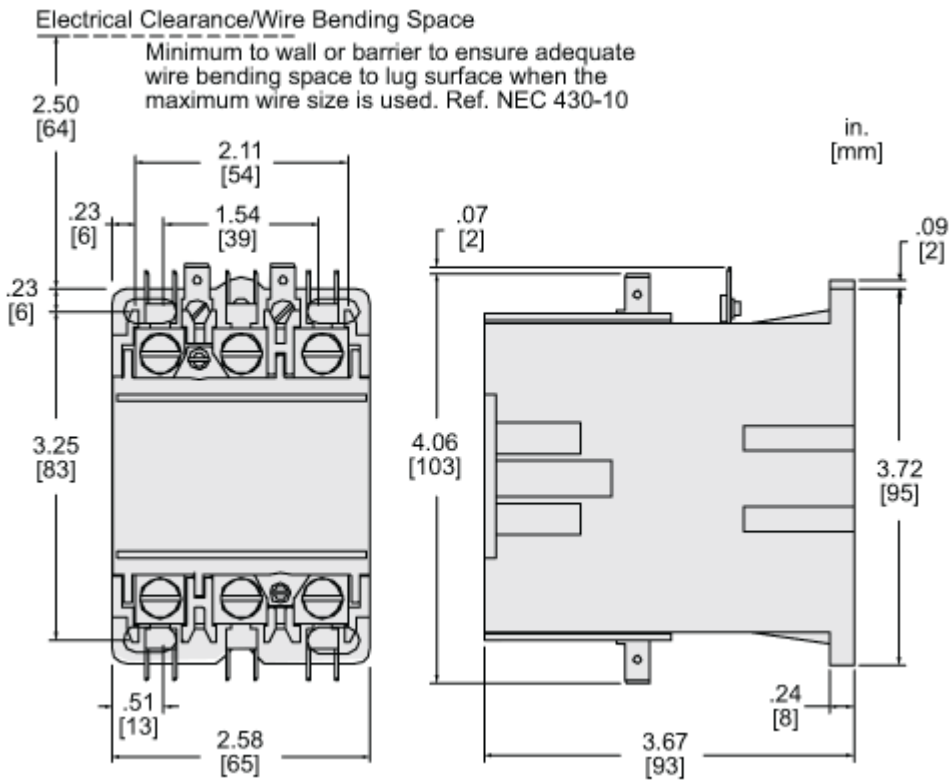

Technical Illustration

Wiring diagram

