

Product data sheet

Specifications



30mm Push Button, Type K, push button, no guard, universal

9001KR3U

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony 9001K
Product or Component Type	Head for push-button
Device short name	9001K
Operator profile	projecting, unmarked
Operator additional information	Without guard

Complementary

Mounting diameter	1.2 in (30 mm)
Shape of signaling unit head	Round
Type of operator	spring return
Product Weight	0.20 lb(US) (0.09 kg)
Bezel material	Metal
Cap/operator or lens colour	7 colours choice
Operator profile	Projecting
Type of operator	Spring return
Contacts type and composition	Without contact block

Environment

IP Degree of Protection	IP65/IP66
-------------------------	-----------

Ordering and shipping details

Category	US10CS121426
Discount Schedule	0CS1
GTIN	785901874911
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.00 in (5.08 cm)
Package 1 Width	2.300 in (5.842 cm)
Package 1 Length	2.800 in (7.112 cm)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Package weight(Lbs)	3.680 oz (104.326 g)
Unit Type of Package 2	PAL
Number of Units in Package 2	3200
Package 2 Height	40.0 in (101.6 cm)
Package 2 Width	40.0 in (101.6 cm)
Package 2 Length	48.00 in (121.92 cm)
Package 2 Weight	765.999 lb(US) (347.451 kg)

Contractual warranty

Warranty (in months)	18
-----------------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

Yes

SCIP Number

Ae0c4eb9-0bfb-40a4-851f-5c619fbe777d

EU RoHS Directive

[Compliant By Exemption](#)

REACH Regulation

[Reference contains Substances of Very High Concern above the threshold](#)

California proposition 65

WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer

Lifetime extension

Repair

No

Use Again

Repack and remanufacture

Circularity Profile

[End of Life Information](#)

Take-back


No

WEEE Label

The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings


Dimensions

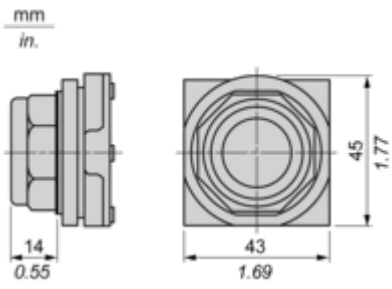

Mounting and Clearance

Contact Block Mounting Position


Top and Rear views

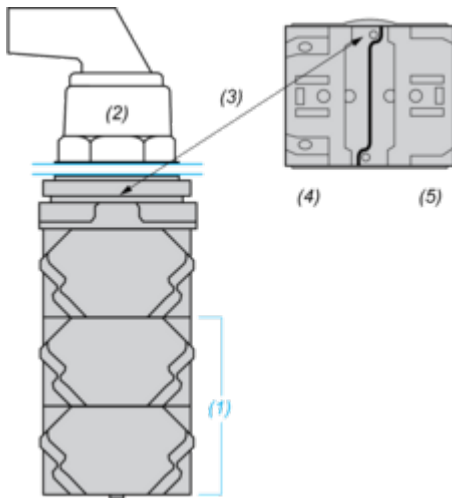

- (1) It is possible to mount up to 3 levels of contacts blocks (maximum of 6 contacts blocks)
- (2) Operator
- (3) Locating notch
- (4) Side 1
- (5) Side 2

Panel Cut-Out


Clearance

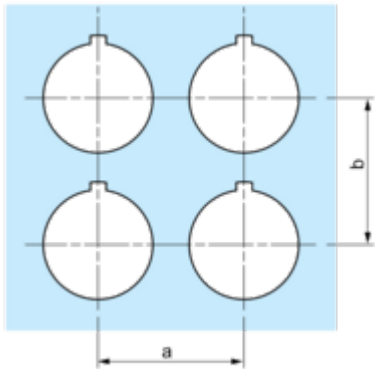

Legend plate	a min.		b min.	
	mm	in.	mm	in.
9001KN2••	57.2	2.25	44.5	1.75
9001KN3••	57.2	2.25	50.8	2.00

Individual Cut-outs Details

2 alternatives

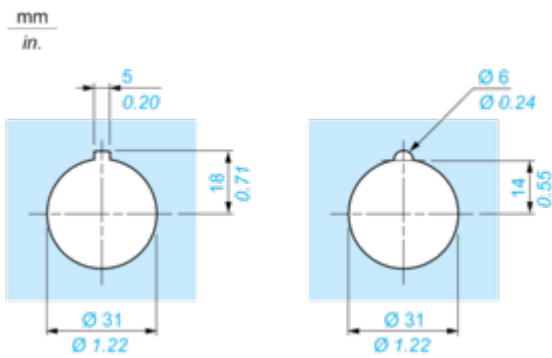

Offer Marketing Illustration

Product benefits / Features

Features
Harmony 9001K



- 

Improved security thanks to finger-safe contact blocks and light modules
- 

Single screw Contact Block Fastening
- 

Robustness to withstand the harshest environments
- 

Automatic self-grounding operators without additional wiring
- 

Large metal set of accessories to customize your product

Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony 9001K



Image of product / Alternate images

Alternative







