


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

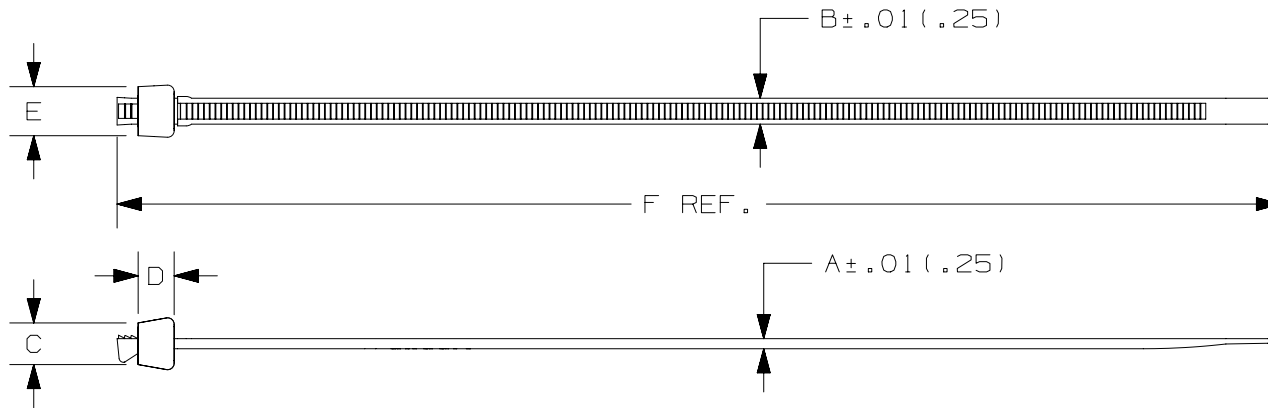


PANDUIT PART NO.*	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs. (N)	CROSS- SECTION	WEIGHT lbs./100pcs. (g)
	MIN. in (mm)	MAX. in (mm)									
SST1.5S	.06 (1.5)	1.25 (32)	.045 (1.2)	.180 (4.6)	.250 (6.4)	.165 (4.2)	.310 (7.9)	5.7 (146)	50 (222)	STANDARD	.18 (80)
SST2S	.06 (1.5)	1.75 (45)	.045 (1.2)	.180 (4.6)	.250 (6.4)	.165 (4.2)	.310 (7.9)	6.7 (172)	50 (222)	STANDARD	.22 (100)
SST3S	.06 (1.5)	3.00 (76)	.048 (1.2)	.180 (4.6)	.250 (6.4)	.165 (4.2)	.310 (7.9)	11.0 (279)	50 (222)	STANDARD	.44 (201)
SST4S	.06 (1.5)	4.00 (102)	.048 (1.2)	.190 (4.8)	.253 (6.4)	.200 (5.1)	.350 (8.9)	15.0 (381)	50 (222)	STANDARD	.59 (266)

A

A NOTES:

*1) SEE panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR.

							TITLE		STA-STRAP SS		CABLE TIES SERIES		CUSTOMER DRAWING		A	
							ITEM REVISION NAME		W10001CF/05		PANDUIT					
							DATASET FILE NAME		W10001CF_DC/05A							
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		.x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °				MATERIAL:		NYLON 6.6	
05A	3.20.25	BWG	JADE	DJSL	b. SST4S B DIMENSION WAS .180 (4.6) a. CHANGED NOTES TO REFERENCE PANDUIT.COM, UPDATED TITLE BLOCK TO LATEST TEMPLATE	011361/00					THIRD ANGLE PROJECTION		DRAWING NUMBER:		SS - 5550	
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY		DATE		CHK		SCALE		SIZE	
							LEF		5/5/15		BWG		NONE		A	
													SHT 2 OF 3			