


Terminal cover for 3RW55/52 Size 2 and 3

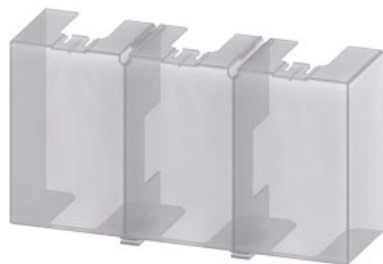

|                                               |                          |
|-----------------------------------------------|--------------------------|
| product brand name                            | SIRIUS                   |
| product category                              | Terminal covers          |
| product designation                           | Terminal cover           |
| product type designation                      | 3RW59                    |
| manufacturer's article number of soft starter |                          |
| •                                             | 3RW522 (2x), 3RW523 (2x) |
| •                                             | 3RW552 (2x), 3RW553 (2x) |

| General technical data                                  |                                                  |
|---------------------------------------------------------|--------------------------------------------------|
| Substance Prohibitation (Date)                          | 02/15/2018                                       |
| Weight                                                  | 0.101 kg                                         |
| Ambient conditions                                      |                                                  |
| ambient temperature during storage and transport        | -40 ... +80 °C                                   |
| Electrical Safety                                       |                                                  |
| protection class IP on the front according to IEC 60529 | IP20                                             |
| touch protection on the front according to IEC 60529    | finger-safe, for vertical contact from the front |

| Approvals Certificates   |     |                                |
|--------------------------|-----|--------------------------------|
| General Product Approval | EMV | For use in hazardous locations |



[KC](#)

[Miscellaneous](#)

| Test Certificates | Marine / Shipping |
|-------------------|-------------------|
|-------------------|-------------------|

[Type Test Certificates/Test Report](#)



| other | Environment |
|-------|-------------|
|-------|-------------|

[Confirmation](#)

[Environmental Confirmations](#)

| Further information          |
|------------------------------|
| Information on the packaging |

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5983-0TC20>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5983-0TC20>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5983-0TC20>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RW5983-0TC20&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5983-0TC20&lang=en)

Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current


<https://support.industry.siemens.com/cs/ww/en/ps/3RW5983-0TC20/char>

Characteristic: Installation altitude

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5983-0TC20&objecttype=14&gridview=view1>

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

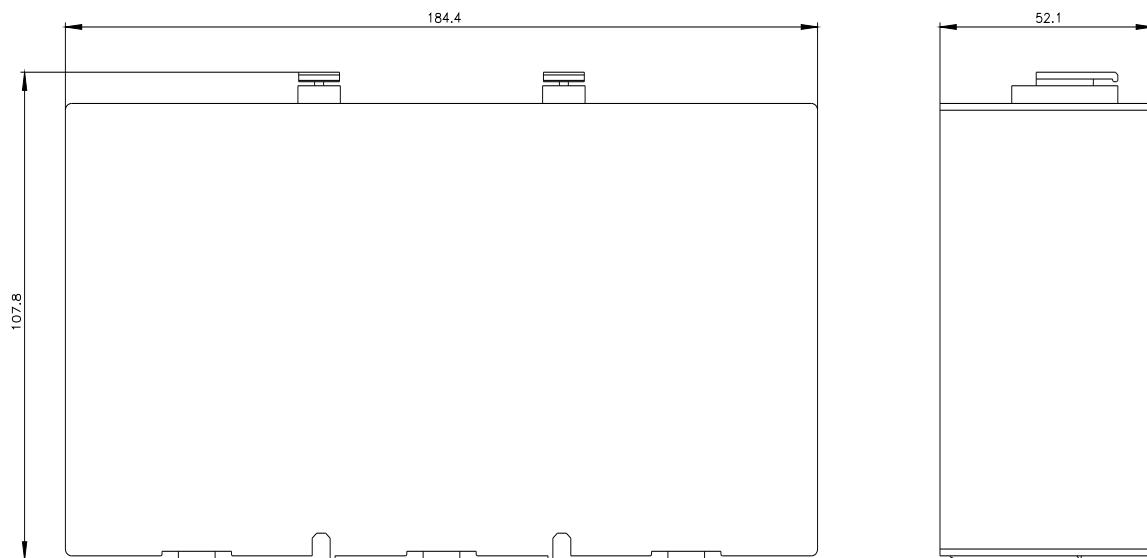

last modified:

4/2/2025 

