Product data sheet

Specifications



communication module, Modicon X80, Serial link module, 2 RS485 or 232 ports in Modbus and character mode, severe environment

BMXNOM0200H

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Modicon X80
Product or Component Type	Serial links module
Product Specific Application	For severe environments
Concept	Serial link
Integrated connection type	RS232 RJ45 115.2 kbit/s 8 wires RS485 RJ45 57.6 kbit/s 1 twisted pair
Protective treatment	Conformal coating

Complementary

Supply	Internal power supply via rack
Marking	CE
Local signalling	1 LED (red) for module fault (ERR) 1 LED (green) for module running (RUN) 1 LED (green) for activity on the serial link (SER COM 0) 1 LED (green) for activity on the serial link (SER COM 1)
Current consumption	80 mA 24 V DC
Module format	Standard
Product Weight	0.51 lb(US) (0.23 kg)

Environment

Ambient Air Temperature for Operation	-13…158 °F (-25…70 °C)
Relative Humidity	10…95 % without condensation
IP Degree of Protection	IP20
Directives	2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility 2014/34/EU - ATEX directive
Product certifications	CE UL CSA RCM EAC Merchant Navy ATEX zone 2/22 IECEx zone 2/22

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Standards	IEC 61131-2 IEC 61010-2-201 UL 61010-2-201 CSA C22.2 No 61010-2-201 IACS E10 IEC 61000-6-5, interface type 1 and type 2 IEC 61850-3, location G IEC 60079-0
Environmental characteristic	Gas resistant class Gx ISA S71.04 Gas resistant class 3C4 IEC 60721-3-3 Dust resistant class 3S4 IEC 60721-3-3 Sand resistant class 3S4 IEC 60721-3-3 Salt resistant level 2 IEC 68252 Mold growth resistant class 3B2 IEC 60721-3-3 Fungal spore resistant class 3B2 IEC 60721-3-3 Hazardous location class I division 2

Ordering and shipping details

Category	US1PC3418160
Discount Schedule	PC34
GTIN	3595864027388
Returnability	Yes
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.2 in (5.5 cm)
Package 1 Width	4.4 in (11.2 cm)
Package 1 Length	4.6 in (11.8 cm)
Package weight(Lbs)	8.08 oz (229.0 g)
Unit Type of Package 2	S02
Number of Units in Package 2	15
Package 2 Height	5.9 in (15.0 cm)
Package 2 Width	11.8 in (30.0 cm)
Package 2 Length	15.7 in (40.0 cm)
Package 2 Weight	8.117 lb(US) (3.682 kg)

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**102 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**16 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**0 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0.1 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**86 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**0.4 kg CO2 eq.**
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**Yes**
EU RoHS Directive	Compliant By Exemption
REACh Regulation	Reference contains Substances of Very High Concern above the threshold
California proposition 65	**WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**

Use Longer

Lifetime extension

Repair	**No**

Use Again


Repack and remanufacture

Recyclability potential, in %	**32**
Circularity Profile	End of Life Information
Take-back	**No**

Dimensions Drawings

Modules Mounted on Racks

Dimensions

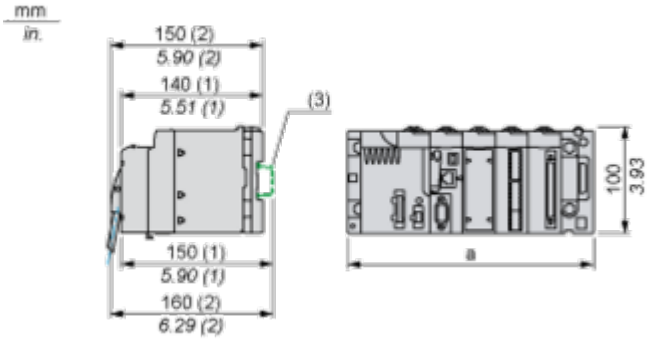


(1) With removable terminal block (cage, screw or spring).
(2) With FCN connector.
(3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81

Image of product / Alternate images

Alternative

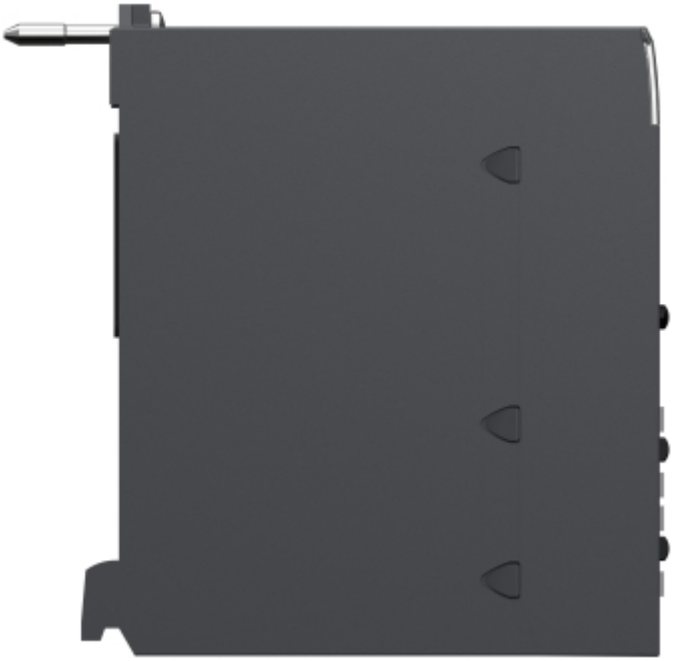




Schneider
Electric
Modicon
BMXNOM0200H
BUS MODULE 2 RS485/232
PORTS
DOM : XXXX


NOM0200H
RUN
ERR
I/O
SER COM0
SER COM1
COM
Port 0
RS232
COM
Port 0
RS485
COM
Port 1
RS485


SN:XXXXXXXXXXX
PV:XX SV:XX RL:XX

