Product data sheet

Specifications



To be discontinued

peripheral remote IO adaptor module, Modicon X80, max 1024 discrete with 256 analog IO, Ethernet

BMXPRA0100

To be discontinued on: Dec 1, 2027

To be end-of-service on: Dec 31, 2035

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Modicon X80
Product or Component Type	Peripheral remote I/O adaptor

Complementary

Number of port	1
Integrated connection type	Ethernet/IP device network
Communication Port Protocol	Modbus TCP
Realtime clock	With
Memory capacity	448 kB internal 96 kB removable
Application structure	1 master task
Local signalling	1 LED (green) for module active (RUN) 1 LED (red) for module error (ERR) 1 LED (red) for external fault (I/O) 1 LED (green) for activity on Ethernet network (ETH ACT) 1 LED (red) for memory card fault (CARD ERR) 1 LED (green) for Ethernet link diagnostics (STS) 1 LED (green) for Ethernet network status (link)
Product compatibility	0…1024 discrete I/O module 0…256 analog I/O module 0…2 Ethernet module
Average consumption in mA	95 mA
Power dissipation in W	2.3 W
Marking	CE
Module format	Standard
Maximum altitude transport	9842.5 ft (3000 m)
Relative Humidity	95 % without condensation

Environment

Directives	2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility 2014/34/EU - ATEX directive

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Product certifications	CE UL CSA RCM EAC Merchant Navy ATEX zone 2/22 IECEx zone 2/22
Standards	IEC 61131-2 IEC 61010-2-201 UL 61010-2-201 CSA C22.2 No 61010-2-201 IACS E10 IEC 61000-6-5, interface type 1 and type 2 IEC 61850-3, location G IEC 60079-0
Environmental characteristic	Hazardous location class I division 2
IP Degree of Protection	IP20
Ambient Air Temperature for Operation	-13…158 °F (-25…70 °C)
Ambient Air Temperature for Storage	-40…185 °F (-40…85 °C)
Operating altitude	<= 6561.68 ft (2000 m)

Ordering and shipping details

Category	US1PC3418160
Discount Schedule	PC34
GTIN	3595864063317
Returnability	Yes
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.165 in (5.500 cm)
Package 1 Width	4.331 in (11.000 cm)
Package 1 Length	4.528 in (11.500 cm)
Package weight(Lbs)	8.607 oz (244.000 g)
Unit Type of Package 2	S02
Number of Units in Package 2	15
Package 2 Height	5.906 in (15.000 cm)
Package 2 Width	11.811 in (30.000 cm)
Package 2 Length	15.748 in (40.000 cm)
Package 2 Weight	8.818 lb(US) (4.000 kg)
Unit Type of Package 3	P06
Number of Units in Package 3	240
Package 3 Height	29.528 in (75.000 cm)
Package 3 Width	23.622 in (60.000 cm)
Package 3 Length	31.496 in (80.000 cm)
Package 3 Weight	163.142 lb(US) (74.000 kg)

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**120 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**17 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**0 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0.1 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**103 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**0.4 kg CO2 eq.**
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**Yes**
EU RoHS Directive	Compliant By Exemption
REACh Regulation	Reference contains Substances of Very High Concern above the threshold
California proposition 65	**WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**

Use Longer

Lifetime extension

Repair	**No**

Use Again


Repack and remanufacture

Recyclability potential, in %	**32**
Circularity Profile	End of Life Information
Take-back	**No**

Dimensions Drawings

Modules Mounted on Racks

Dimensions

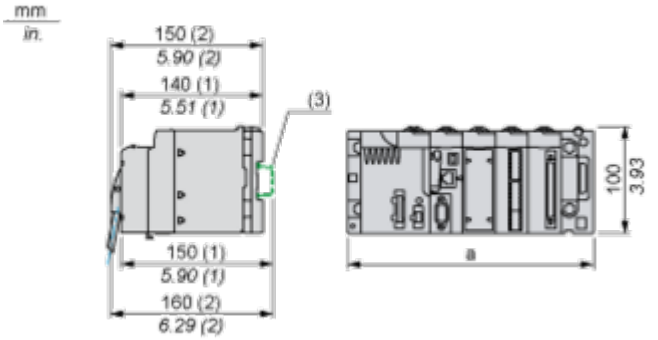

(1) With removable terminal block (cage, screw or spring).
(2) With FCN connector.
(3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81


Image of product / Alternate images


Alternative





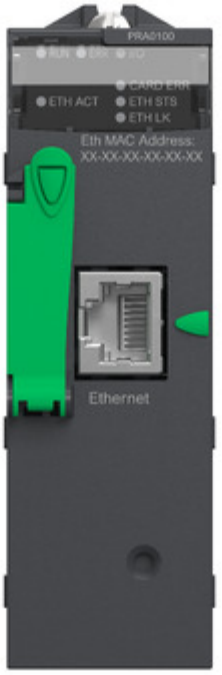


PRA0100
CARD ERR
ETH ACT
ETH STS
ETH LK
Eth MAC Address:
XX-XX-XX-XX-XX-XX
Ethernet

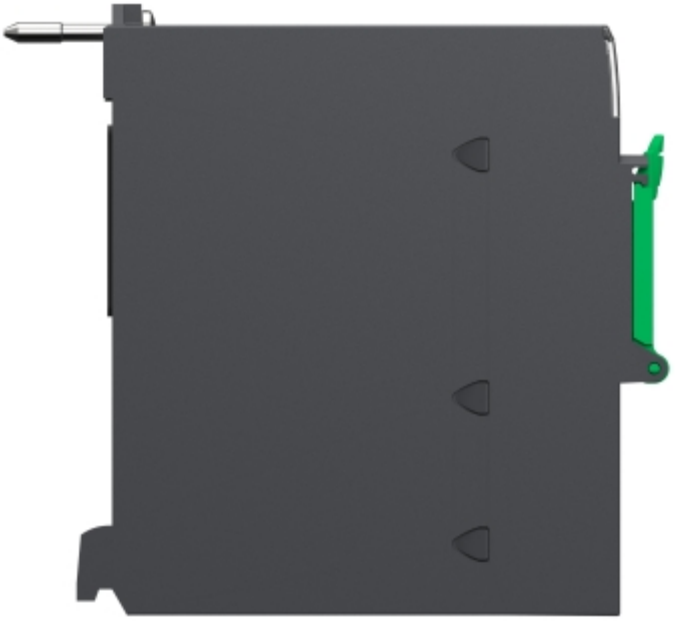


SN:XXXXXXXXXXX
PV:XX SV:XX RL:XX