


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS in.				
		A ±.03	W ±.01	C ±.02	M ±.03	H ±.01
PV2-10R	#10	1.96 (49.78)	.68 (17.27)	.58 (14.73)	1.62 (41.15)	.20 (5.08)
PV2-14R	1/4"	1.96 (49.78)	.68 (17.27)	.58 (14.73)	1.62 (41.15)	.27 (6.86)
PV2-56R	5/16"	1.96 (49.78)	.68 (17.27)	.58 (14.73)	1.62 (41.15)	.33 (8.38)
PV2-38R	3/8"	1.96 (49.78)	.68 (17.27)	.58 (14.73)	1.62 (41.15)	.39 (9.91)
PV2-12R	1/2"	2.05 (52.07)	.86 (21.84)	.58 (14.73)	1.62 (41.15)	.52 (13.21)

NOTES:

- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A LIST OF CURRENT PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
- DIMENSIONS IN () ARE METRIC.
- UL LISTED FOR:
 - A. 600V MAX VOLTAGE RATING
 - B. 221° F (105° C) MAX TEMP RATING.
 - C. #2 AWG STRANDED COPPER WIRE.
- PART INCLUDES:
 - A. STAMPING - .060" (1.52) THK COPPER, TIN PLATED.
 - B. HOUSING - VINYL, RED.
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
- INSTALLATION TOOL: CT-2600.
- WIRE STRIP LENGTH: 1/2" +1/32 (12.7 + 0.8 - 0 - 0)

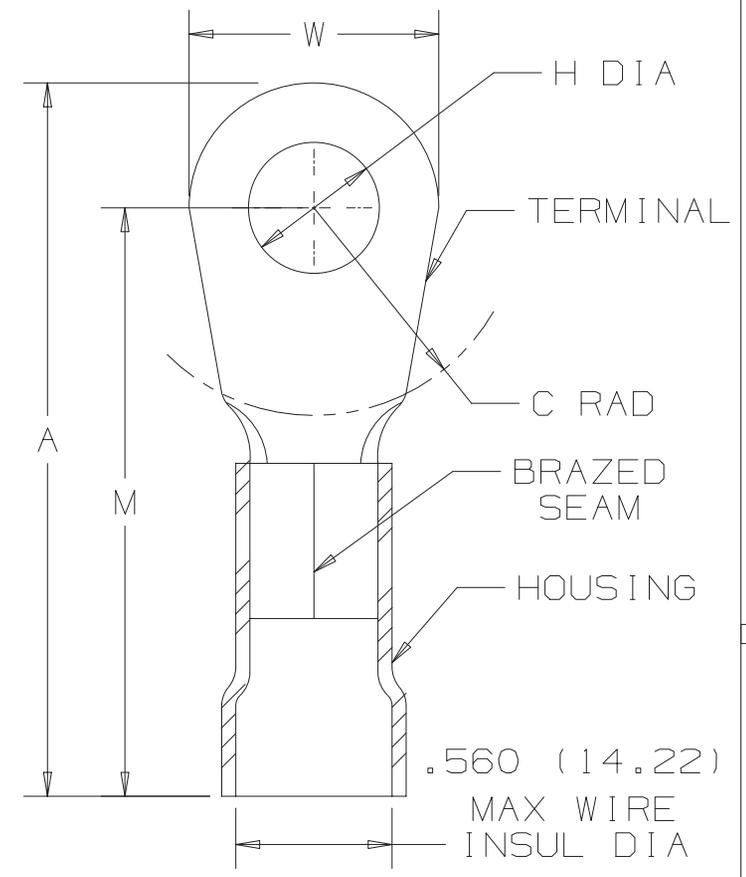

PART NUMBER		SEE CHART	
TITLE		#2 BARREL VINYL INSULATED RING TONGUE .560 [14.22] MAX. WIRE INSUL. DIAMETER	
ITEM REVISION NAME		CUSTOMER DRAWING	
DATASET FILE NAME		N41216BB/09	
MATERIAL		SEE NOTES	
DRAWING NUMBER		A41216	
DRAWN BY		DAW	
DATE		01-01-15	
CHK		-	
SCALE		N/A	
SHEET 1 OF 1		A	

B

B

A

A

A-SIZE CUSTOMER

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
09	09-18-25	DPOI	DPOI	JSUN	ADDED CT-2600 REMOVE CT-720 TOOL. UPDATED TITTLE BLOCK TO LATESTS STANDARDS.	022627/00
08	01-01-15	JHNU	TMR	RGB	REVISED LOGO TO cULus & TITTLE BLOCK.	N41216BB