

## Specification Sheet


Part Number: 109-00020

Open-head design with easily detectable slot opening allows for swift and easy insertion

Pre-lock feature allows for a temporary hold

The large ribbed tail permits an ergonomic installation

Two rails on the strap ensure guidance through the cable tie head

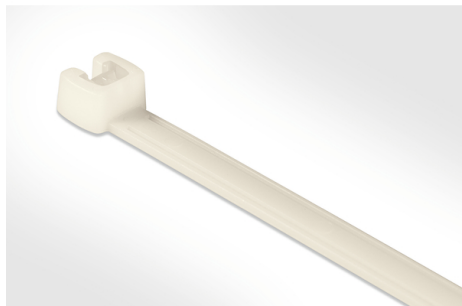

Q Tie, 11.4" Long, 50lb Tensile Strength, PA66, Natural, 100/pkg

Article Number

109-00020

Type

Q50I

Color

Natural (NA)

Quantity Per

pack

Product Description

Q-Ties have a distinctive open-style head, a pre-lock function, and a large ribbed tail. The easily detectable slot opening offered with the tail and tie head provides ease of placement when working with gloves or for blind applications with limited view of the installation. The pre-lock feature allows for temporary holding of cable and wire bundles, permitting additional cables and wires to be placed without destroying the cable tie. Q-Ties can be tensioned by hand or with one of HellermannTyton's mechanical cable tie application tools.

|                                     |                                                                  |
|-------------------------------------|------------------------------------------------------------------|
| Short Description                   | Q Tie, 11.4" Long, 50lb Tensile Strength, PA66, Natural, 100/pkg |
| Global Part Name                    | Q50I-PA66-NA                                                     |
| Minimum Tensile Strength (Imperial) | 50                                                               |
| Minimum Tensile Strength (Metric)   | 220                                                              |
| Length L (Imperial)                 | 11.4                                                             |
| Length L (Metric)                   | 290.0                                                            |
| Identification Plate Position       | none                                                             |
| Releasable Closure                  | No                                                               |
| Tie Closure                         | plastic pawl                                                     |
| Variant                             | Inside Serrated                                                  |
| Width W (Imperial)                  | 0.19                                                             |
| Width W (Metric)                    | 4.7                                                              |
| Bundle Diameter Min (Imperial)      | 0.12                                                             |
| Bundle Diameter Min (Metric)        | 3.0                                                              |
| Bundle Diameter Max (Imperial)      | 2.95                                                             |
| Bundle Diameter Max (Metric)        | 75.0                                                             |

|                              |                                                        |
|------------------------------|--------------------------------------------------------|
| Thickness T (Imperial)       | 0.06                                                   |
| Thickness T (Metric)         | 1.5                                                    |
| Material                     | Polyamide 6.6 (PA66)                                   |
| Material Shortcut            | PA66                                                   |
| Flammability                 | UL 94 V-2                                              |
| Halogen Free                 | Yes                                                    |
| UV Resistant (Yes/No)        | No                                                     |
| Use Conditions               | For Indoor Use Only                                    |
| Operating Temperature        | -40°F to +185°F (-40°C to +85°C)                       |
| Reach Compliant (Article 33) | Yes                                                    |
| ROHS Compliant               | Yes                                                    |
| Certification/Specification  | UL   ANSI/UL 746B UL   ANSI/UL 62275 UL   ANSI/UL 1565 |
| UL Listed (US and Canada)    | Yes                                                    |
| Package Quantity (Imperial)  | 100                                                    |
| Package Quantity (Metric)    | 100                                                    |

Customs Number

3926909988

7930 N. Faulkner Road, Milwaukee, WI 53224

Phone: (800) 537-1512 | Email: [corp@htamericas.com](mailto:corp@htamericas.com)

© 2025 HellermannTyton. All Rights Reserved.

[Contact Us](#)   [RoHS/WEEE Compliance](#)   [Disclaimer](#)   [Terms and Conditions](#)