THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

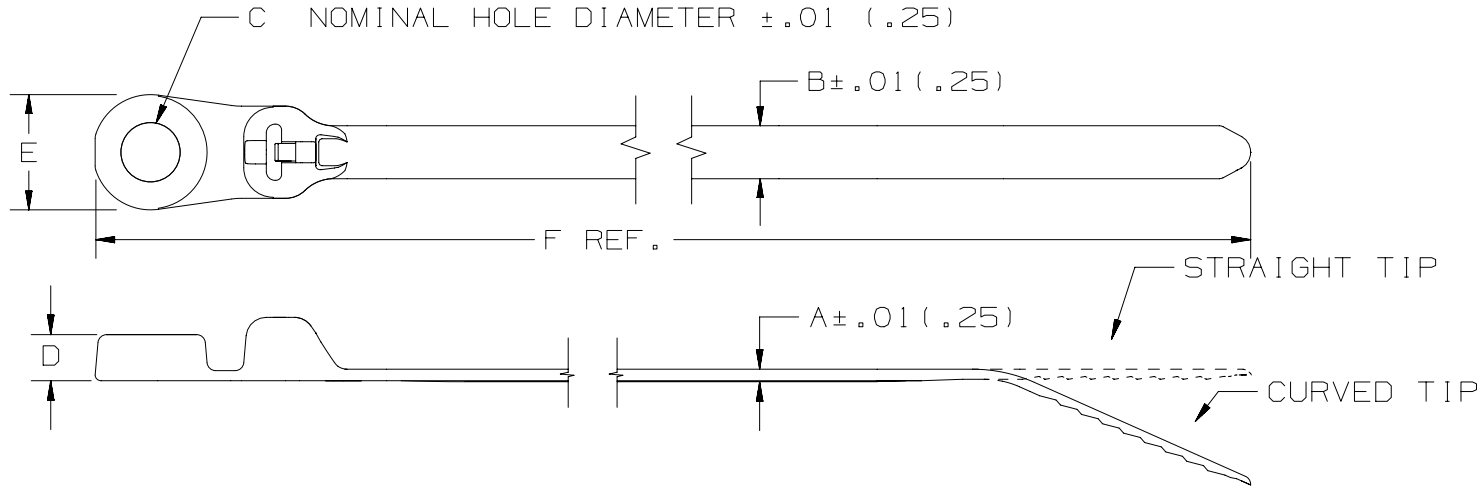

PANDUIT PART NO.	BUNDLE DIA. MIN. in (mm)	BUNDLE DIA. MAX. in (mm)	A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs. (N)	CROSS SECTION	TIP STYLE	RECM. FASTENER	WEIGHT lbs./100 pcs. (g)
BC2S-S10	.06 (1.5)	2.00 (51)	.052 (1.3)	.185 (4.7)	.200 (5.1)	.160 (4.1)	.400 (10.2)	8.5 (216)	50 (222)	STANDARD	CURVED	#10 (M5) SCREW	.36 (163)
BC3S-S10	.06 (1.5)	3.00 (76)	.052 (1.3)	.185 (4.7)	.200 (5.1)	.160 (4.1)	.400 (10.2)	12.5 (318)		STANDARD	CURVED	#10 (M5) SCREW	.47 (213)
BC4S-S10	.06 (1.5)	4.00 (102)	.052 (1.3)	.185 (4.7)	.200 (5.1)	.160 (4.1)	.400 (10.2)	15.6 (396)		STANDARD	CURVED	#10 (M5) SCREW	.58 (263)
BC4LH-S25	.188 (4.8)	4.00 (102)	.065 (1.7)	.275 (7.0)	.260 (6.6)	.265 (6.7)	.520 (13.2)	15.5 (394)	120 (534)	LIGHT HEAVY	STRAIGHT	.25 (M6) SCREW	1.18 (535)

NOTES:
1. SEE www.panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE, PART MATERIAL, PART COLOR AND ANY THIRD PARTY RECOGNITION OR COMPLIANCE.

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
10A	8-14-25	KEMA	MPH	DJSL	CHANGED MATERIAL BLOCK TO NYLON 6.6 WITH 316 STAINLESS STEEL BARB	017076/00
9	5-31-05	ERW	JVL		CHANGED DIMENSION 'C' FROM A TOLERANCE TO A NOMINAL HOLE DIAMETER	0070

TITLE

DOME-TOP Barb Ty LOCKING CLAMP TIE-BC SERIES

CUSTOMER DRAWING

ITEM REVISION NAME: BT_0070_SH2/AB

DATASET FILE NAME: BT-0070_DC_SH2 of 2 r10A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]

.X ± - .XXX ± .020 [.51]

.XX ± .02 [.5] ANGLES ± -

THIRD ANGLE PROJECTION

MATERIAL: NYLON 6.6 WITH 316 STAINLESS STEEL BARB

DRAWING NUMBER: BT-0070

DRAWN BY	DATE	CHK	SCALE	SHT 2 OF 2	SIZE
FKS	8-29-94	JVL	N/A		A

NXGLOBAL_ASIZE