

FWC 10 x 38 mm Ferrule High speed fuse links

**Catalogue symbol**

- FWC-(amps)A10F (1 to 32 A)

Description

Ferrule style high speed fuse links.

Technical data

- Rated voltage:
 - 700 V a.c./V d.c. (UL 1-4 A)
 - 600 V a.c. (UL 6-32 A)
 - 700 V d.c. (UL 6-25 A)
- Rated current: 1 - 32 A
- Breaking capacity:
 - 200 kA RMS Sym. at 600 V a.c. for 6-32 A
 - 200 kA RMS Sym. at 700 V a.c. for 1-4 A
 - 10 kA at 700 V d.c. for 1-25 A
- Operating class: aR

Agency information

- CE
- UL Recognised JFHR8.E91958 for 6-32 A
- CSA Component acceptance class 1422-30 (53787) for 6-32 A

Features and benefits

- Excellent cycling capability and DC performance
- Low arc voltage and low energy let-through (I^2t)
- Low watts loss in a compact size
- Used with finger-safe holders/blocks

Typical applications

- DC common bus
- DC drives
- Power converters/rectifiers
- Reduced voltage starters

Carton quantity

- 10 per carton

Carton weight

- 0.1 (kg)

Size	Catalogue numbers (amps)
10 x 38mm ($1\frac{13}{32}$ x $2\frac{1}{2}$ ")	FWC-1A10F
	FWC-2A10F
	FWC-3A10F
	FWC-4A10F
	FWC-6A10F
	FWC-8A10F
	FWC-10A10F
	FWC-12A10F
	FWC-16A10F
	FWC-20A10F
	FWC-25A10F
	FWC-32A10F




Powering Business Worldwide

Electrical characteristics


Total clearing I²t

The total clearing I²t at rated voltage and at a power factor of 15 percent are given in the electrical characteristics. For other voltages, the clearing I²t is found by multiplying by correction factor, K, given as a function of applied working voltage, E_g, (RMS).




Arc voltage

This curve gives the peak arc voltage, U_L, which may appear across the fuse during its operation as a function of the applied working voltage, E_g, (RMS) at a power factor of 15 percent.



Watts losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the watts losses at load currents lower than the rated current. The correction factor, K_p, is given as a function of the RMS load current, I_b, in percent of the rated current.




Technical data


Catalogue numbers	Rated voltage V a.c. / V d.c.	Rated current RMS- Amps	I²t (A² Sec)		
			Pre-arc	Clearing at 600 V	Watts loss**
FWC-1A10F	700 V a.c./ V d.c. (UL)	1	0.2	1.2	0.5
FWC-2A10F		2	0.5	3	1.2
FWC-3A10F		3	1.6	11	1.5
FWC-4A10F		4	5.2	32	1.5
FWC-6A10F	600 V a.c./ 700 V d.c. (UL)	6	4	30	1.5
FWC-8A10F		8	6	50	2
FWC-10A10F		10	9	70	2.5
FWC-12A10F		12	15	120	3
FWC-16A10F		16	25	150	3.5
FWC-20A10F		20	34	260	4.8
FWC-25A10F		25	60	390	6
FWC-32A10F		32	95	600	7.5

**Watts loss provided at rated current


Dimensions - mm

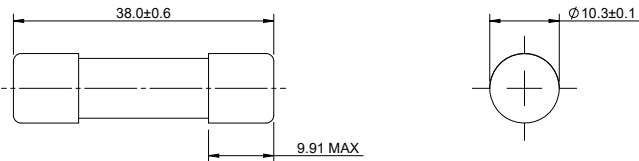

Cut-off curves

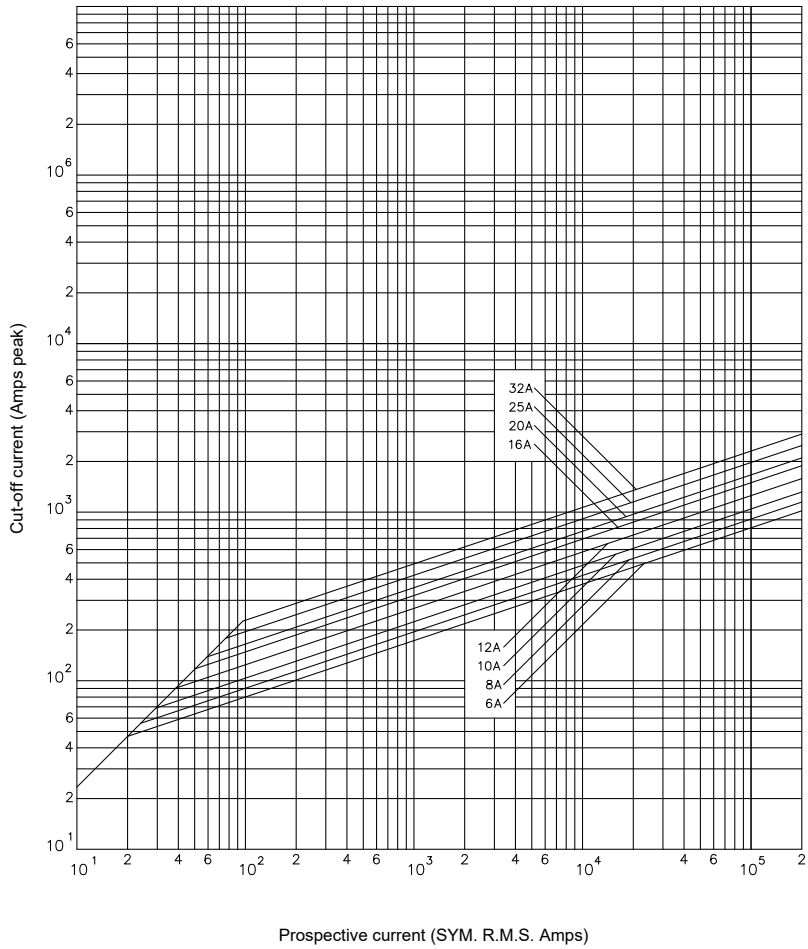

Time-current curve - nominal melt

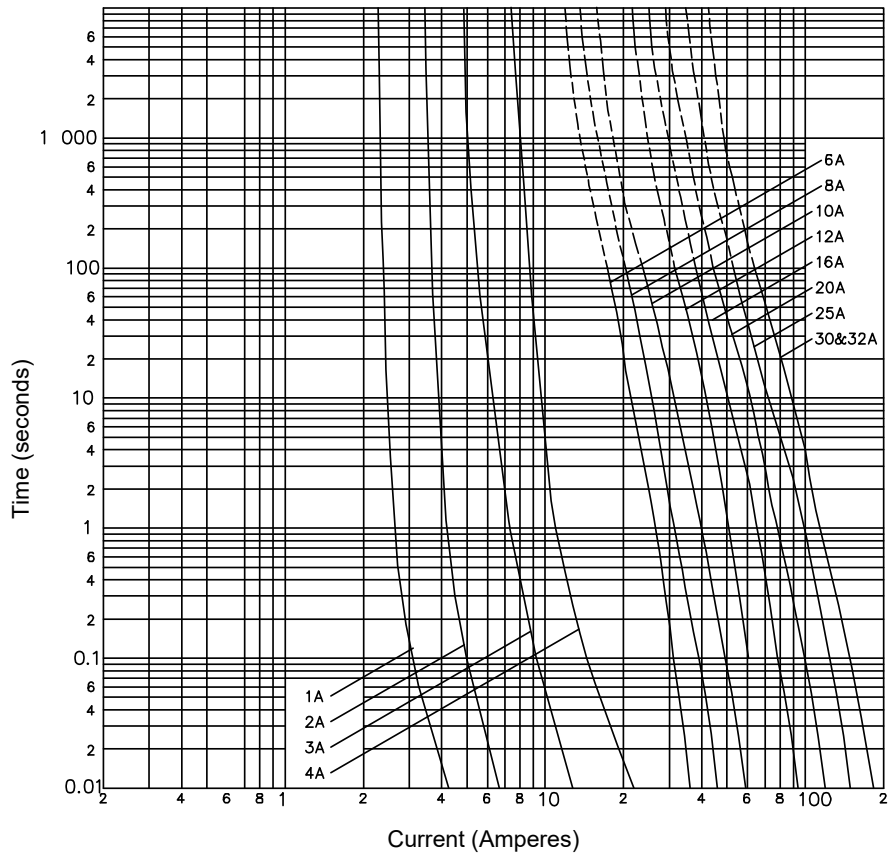

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to Trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

Eaton
EMEA Headquarters
Route de la Longeraie 7
1110 Morges, Switzerland

Eaton Electrical Products Limited
Unit 1, Hawker Business Park
Melton Road
Burton-on-the-Wolds
Leicestershire, LE12 5TH
United Kingdom

© 2017 Eaton
All Rights Reserved
PDF Only
Publication No. 720011 / BU-MC16104
March 2025