


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

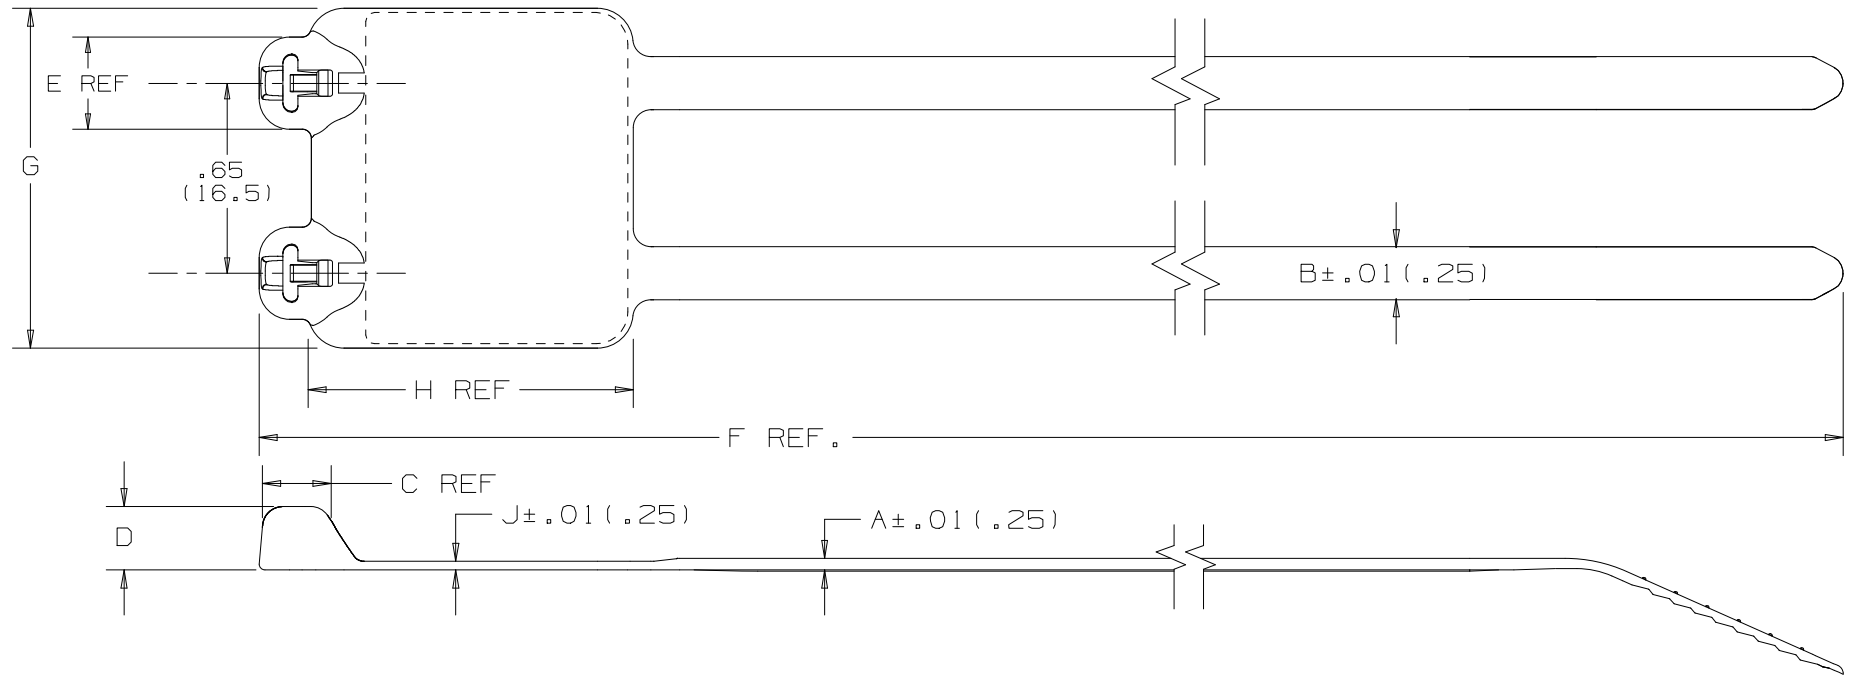

PANDUIT * PART NO.	BUNDLE DIA.		A	B	C	D	E	F	G	H	J	WRITE-ON AREA	MIN LOOP** TENSILE	CROSS- SECTION	WEIGHT
	MIN. in (mm)	MAX. in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in. (mm)			
B2M2S	.37 (9.5)	2.00 (51)	.045 (1.2)	.185 (4.7)	.205 (5.2)	.220 (5.6)	.320 (8.1)	8.0 (203)	1.16 (29.5)	1.1 (27.9)	.032 (.81)	1.15 × .91 (29.2 × 23.1)	50 (222)	STANDARD	.65 (294)

NOTES:

1. SEE www.panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE, PART MATERIAL, PART COLOR AND ANY THIRD PARTY RECOGNITION OR COMPLIANCE.

TITLE					DOME-TOP Barb Ty MARKER TIE BM SERIES				
CUSTOMER DRAWING									
ITEM REVISION NAME									
BT-0251-00/AB					MATERIAL:				
DATASET FILE NAME					NYLON 6.6 WITH 316 STAINLESS STEEL BARB				
BT-0251-DC-r05A					DRAWING NUMBER:				
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]					BT-0251				
.X ± - .XXX ± .020 [.5]					THIRD ANGLE PROJECTION				
.XX ± .02 [.5] ANGLES ± -									
DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	A				
JABO	6-04-97	JVL	N/A						

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
5A	8-14-25	KEMA	MPH	DJSL	CHANGED MATERIAL BLOCK TO NYLON 6.6 WITH 316 STAINLESS STEEL BARB	017076/00
4	12-1-04	ERW	JVL		REWORDED TITLE BLOCK	0251