




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

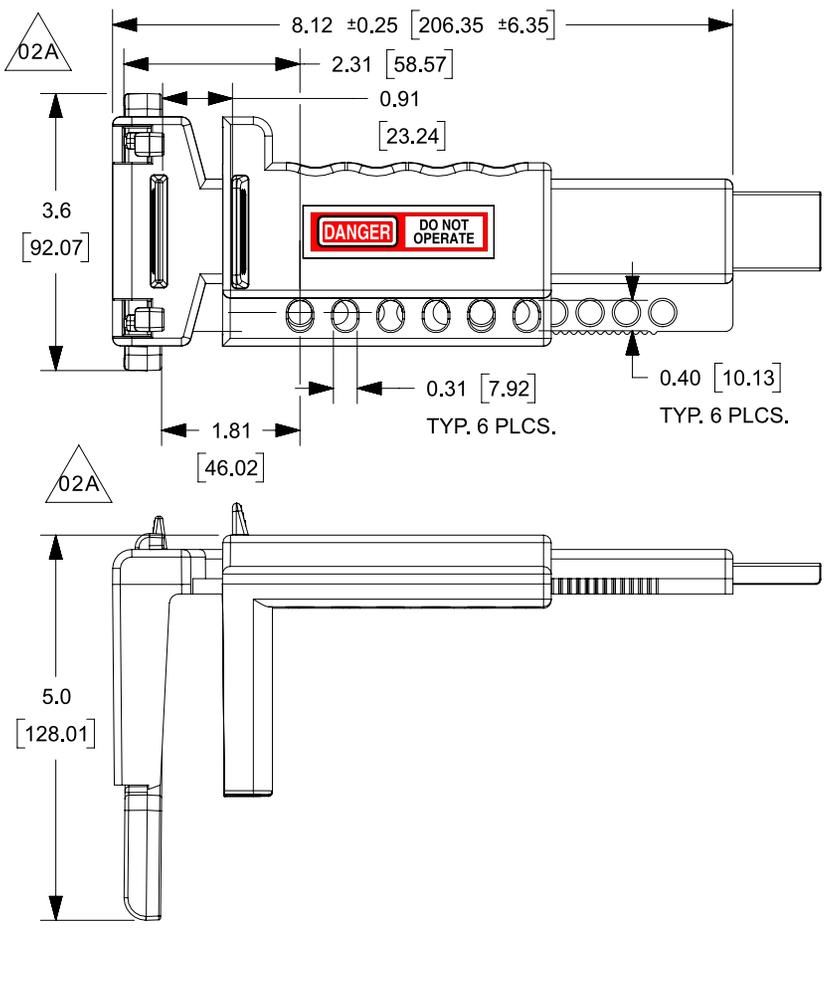

PART NUMBER	VALVE SIZE in. [mm]	STANDARD PKG.	MAX. HANDLE LENGTH	MAX HANDLE WIDTH	OPERATING TEMPERATURE
PSL-BV2	1 1/2" - 2 1/2" [38.1 - 63.5]	1	10" [254.0]	1.0" [25.4]	-40°F(-40°C) TO 215°F(101°C)

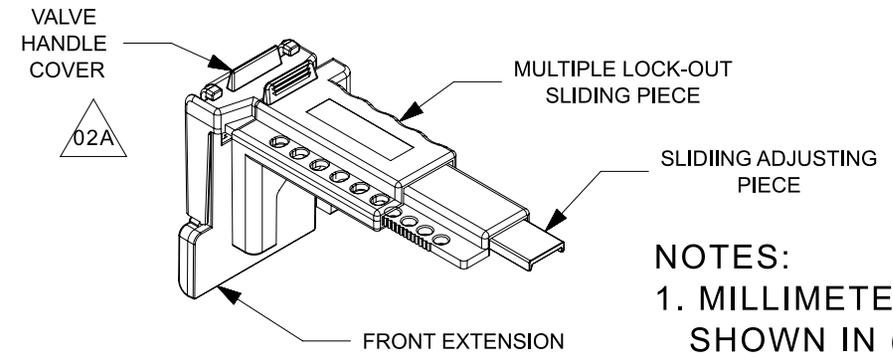

NOTES:  
1. MILLIMETERS SHOWN IN ( ).

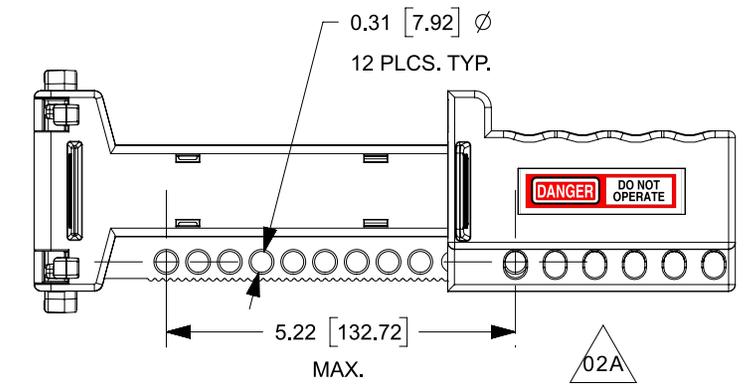

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	3/2/2022	RVU	ANRO	RCMC	REPLACED ALL OLD PSL-BV2 MODEL TO CURRENT PSL-BV2 MODELS.	GAECN06143

TITLE		CUSTOMER DRAWING	
PSL-BV2 BALL VALVE LOCKOUT			
ITEM REVISION NAME		100923CM/02	
DATASET FILE NAME		100923CM_DC/02A C10644 PSL-BV2 r02A CUST DWG	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL:	
.x ± .1 [2.54] .xxx ± .25 [6.35]		RED POLYPROPYLENE PANTONE PMS 186	
.xx ± .5 [12.7] ANGLES ±		DRAWING NUMBER:	
THIRD ANGLE PROJECTION		C10644	
DRAWN BY	DATE	CHK	SCALE
RVU	9/12/03	JHAC	NTS
SHT 1 OF 1		SIZE	
A			