Product data sheet

Specifications



22mm push button, Harmony XALD, empty grey enclosure, die cast zinc alloy, 2 openings, vertical mount, NEMA 4, 13

XAPG29202

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony XAP
Product or Component Type	Die-cast empty control station
Device short name	XAPG
Product destination	For Ø 22 mm control and signalling units
Number of cut-out	2 cut-outs
Colour of base of enclosure	Grey RAL 7032)
Colour of cover	Grey RAL 7032)
Control station type	Metal
Material	Die cast zinc
Sale per indivisible quantity	1
IP degree of protection	IP65 IEC 60529 IP65 IEC 60529
Resistance to chemical agents	Special treatment can be obtained on request

Complementary

Number of vertical rows	1
Number of horizontal rows	2
Cut-out dimensions	Ø 22 mm
Cable entry	cable gland 1 x cable gland
Thread type	3/4 NPT
CAD overall width	3.1 in (80 mm)
CAD overall height	5.1 in (130 mm)
CAD overall depth	2.03 in (51.5 mm)
Product Weight	1.345 lb(US) (0.610 kg)
Compatibility code	XAPG

Environment

Protective treatment	TH
Ambient Air Temperature for Storage	-40…158 °F (-40…70 °C)
Ambient Air Temperature for Operation	-13…158 °F (-25…70 °C)

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Electrical shock protection class	Class I conforming to IEC 60536 Class I conforming to NF C 20-030
IK degree of protection	IK07 IEC 62262

Ordering and shipping details

Category	US10CS222475
Discount Schedule	0CS2
GTIN	3389118381858
Returnability	Yes
Country of origin	MA

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	3.740 in (9.500 cm)
Package 1 Width	3.465 in (8.800 cm)
Package 1 Length	6.142 in (15.600 cm)
Package weight(Lbs)	24.406 oz (691.900 g)
Unit Type of Package 2	S03
Number of Units in Package 2	12
Package 2 Height	11.811 in (30.000 cm)
Package 2 Width	11.811 in (30.000 cm)
Package 2 Length	15.748 in (40.000 cm)
Package 2 Weight	19.522 lb(US) (8.855 kg)

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**5 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**5 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**0.1 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**0 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**0.1 kg CO2 eq.**
Environmental Disclosure	**Product Environmental Profile**

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**Yes**
EU RoHS Directive	**Compliant**
REACh Regulation	**Free of Substances of Very High Concern above the threshold**
California proposition 65	**WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**

Use Longer

Lifetime extension

Repair	**No**


Use Again

Repack and remanufacture

Circularity Profile	**No need of specific recycling operations**
Take-back	**No**

Offer Marketing Illustration

Product benefits / Features

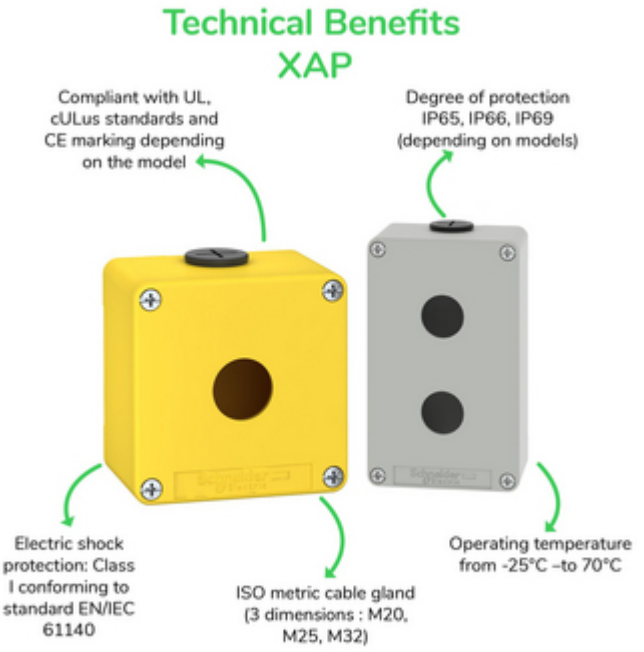

Offer Marketing Illustration

Product benefits / Features

