

2





1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PART NUMBER	WIRE	WIRE STRIP LENGTH	STUD HOLE	OVERALL LENGTH REF	OVERALL HEIGHT REF	B ±0.2	D ±.02	E ±.02	G ±0.2	C ±0.2	T ±0.1	W ±0.1
A6-14RH-C	6	9/16"	1/4	1.33	0.79	0.50	0.31	0.23	0.32	0.76	0.07	0.54
A2-14RH-C	2	3/4"	1/4	1.71	1.20	0.74	0.42	0.31	0.36	0.74	0.10	0.60
A2-56RH-C	2	3/4"	5/16	1.78	1.20	0.74	0.42	0.31	0.36	0.80	0.10	0.66
A2-38RH-C	2	3/4"	3/8	1.80	1.20	0.74	0.42	0.31	0.36	0.83	0.10	0.66
A1/0-38RH-C	1/0	13/16"	3/8	1.93	1.30	0.80	0.52	0.39	0.37	0.84	0.12	0.76
A2/0-56RH-C	2/0	15/16"	5/16	1.89	1.53	0.88	0.58	0.45	0.35	0.80	0.13	0.85
A2/0-38RH-C	2/0	15/16"	3/8	1.99	1.42	0.88	0.58	0.45	0.45	0.90	0.13	0.85
A4/0-38RH-C	4/0	15/16"	3/8	2.39	1.62	0.91	0.69	0.56	0.52	1.14	0.12	1.02
A4/0-12RH-C	4/0	15/16"	1/2	2.39	1.62	0.91	0.69	0.56	0.52	1.14	0.12	1.02

NOTES:

1. MATERIAL: HIGH CONDUCTIVITY SEAMLESS COPPER TUBE
2. PLATING: ELECTRO-TIN
3. WIRE TYPE: STRANDED COPPER; CLASS K
4. cULus LISTED FOR APPLICATIONS UP TO 35KV. CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS WITH APPLICATIONS GREATER THAN 2000 VOLTS.
5. cULus TEMPERATURE RATING: 90° °C

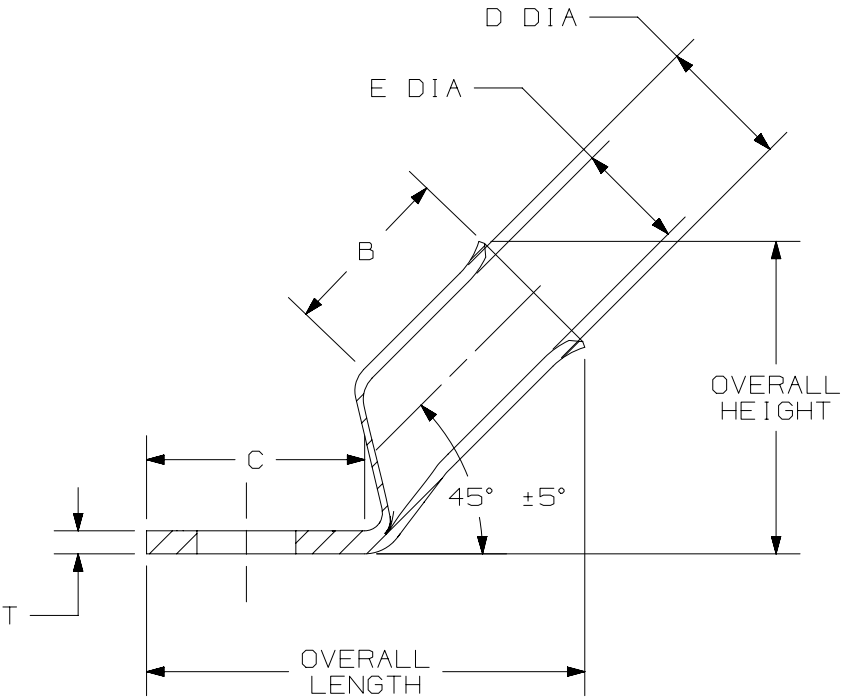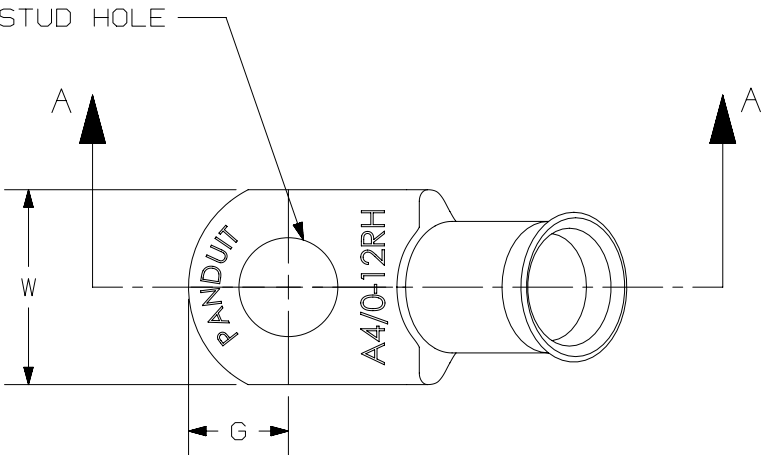

SECTION A - A

PART NUMBER							SEE TABLE						
TITLE							BATTERY CABLE LUG BENT 45						
ITEM REVISION NAME							CUSTOMER DRAWING						
01D	11-18-24	JHNU	JHNU	JSUN	E. ADDED VOLTAGE & TEMPERATURE NOTES	008269	 THIRD ANGLE PROJECTION						
01C	5-30-24	JHNU	JHNU	MRWA	D. REVISED TOLERANCES	004226							
01B	6-20-23	JHNU	JHNU	MRWA	C. ADDED PACKAGING CODE TO PART NUMBERS	131601							
01A	4-27-23	JHNU	JHNU	MRWA	B. ADDED cULus LOGO A. CONVERTED DRAWING TO NX	130501	SEE NOTES						
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY	DATE	CHK	SCALE	DRAWING NUMBER		SIZE
							RUMO	10-8-18	RGB	NONE	00374EBA-DC		B
											SHEET 1 OF 1		

2



1

B-SIZE CUSTOMER