


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

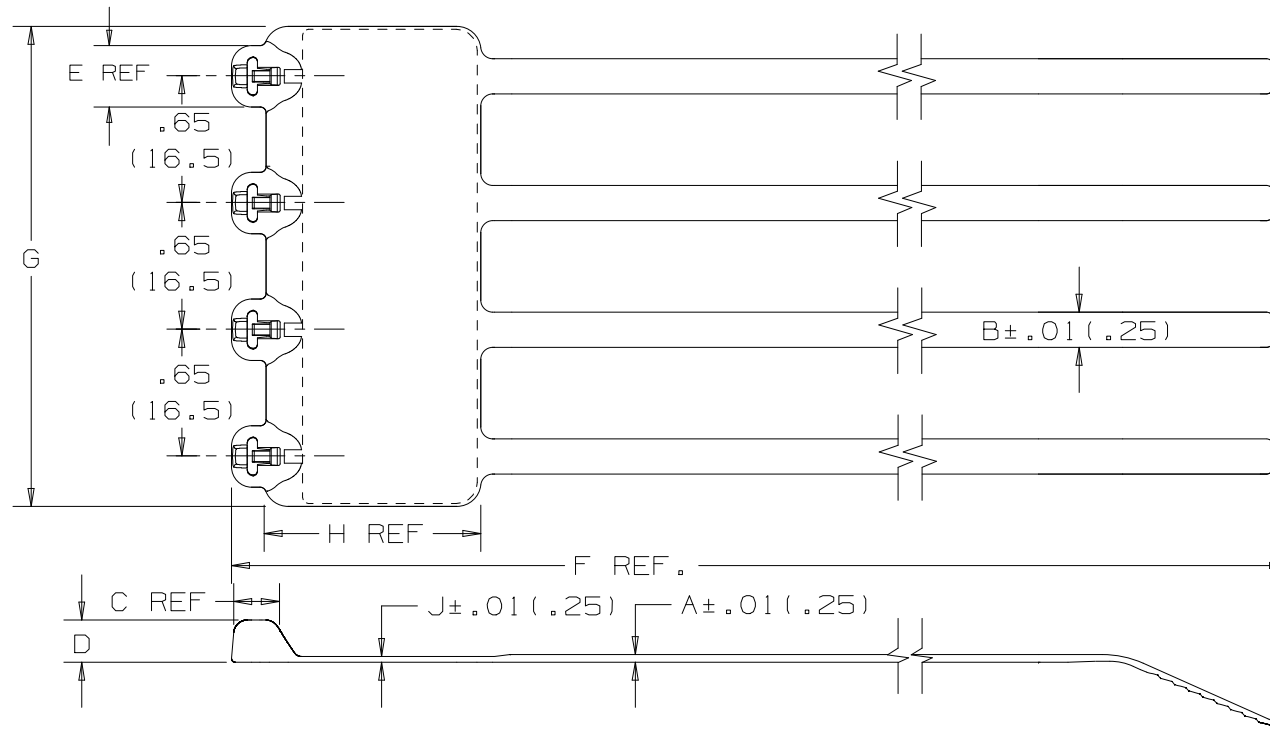

PANDUIT PART NO.	BUNDLE DIA.		A	B	C	D	E	F	G	H	J	WRITE-ON AREA	MIN LOOP TENSILE**	CROSS- SECTION	WEIGHT
	MIN. in (mm)	MAX. in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in. (mm)	lbs. (N)		lbs./100 pcs. (g)
B4M2S	.37 (9.5)	2.00 (51)	.045 (1.2)	.185 (4.7)	.205 (5.2)	.220 (5.6)	.320 (8.1)	8.0 (203)	2.48 (63)	1.1 (27.9)	.032 (.81)	2.47 X .91 (62.7 X 23.1)	50 (222)	STANDARD	1.26 (570)

NOTES:

1. SEE www.panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE, PART MATERIAL, PART COLOR AND ANY THIRD PARTY RECOGNITION OR COMPLIANCE.

TITLE	
DOME-TOP Barb Ty MAKER TIE BM SERIES	
CUSTOMER DRAWING	
ITEM REVISION NAME	BT-0253_00/AB
DATASET FILE NAME	BT-0253_DC_r05A
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]	
.X ± -	.XXX ± .020 [.5]
.XX ± .02 [.51]	ANGLES ± -
THIRD ANGLE PROJECTION	
DRAWN BY	DATE
JAB0	6-9-97
CHK	JVL
SCALE	N/A
MATERIAL:	
NYLON 6.6 WITH 316 STAINLESS STEEL BARB	
DRAWING NUMBER:	
BT-0253	
SHT 1 OF 1	A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
5A	8-14-25	KEMA	MPH	DJSL	CHANGED MATERIAL BLOCK TO NYLON 6.6 WITH 316 STAINLESS STEEL BARB	017076/00
4	12-01-04	ERW	JVL		REWORDED TITLE BLOCK	0253