

Classic filament LED bulbs

5.5ST19/VIN/927/E26/CL/G/SP D 1PF T20

LED, ST19, Only with specific dimmers, E26 | Single Contact Medium Screw, 2700 K, 500 lm, 15000 hour(s), Glass

Featuring a classic heritage design, Classic filament LEDbulbs combine the familiar shapes of classic incandescent bulbs with the benefits of the long lasting LED technology. They deliver beautiful, decorative warm-white light while saving around 90% on energy costs compared with traditional light bulbs.

Product data

General Information	
Cap-Base	E26 [Single Contact Medium Screw]
Nominal lifetime	15,000 hour(s)
Switching Cycle	20,000
Lighting Technology	LED
Light Technical	
Color Code	927 [CCT of 2700K]
Beam Angle (Nom)	330 degree(s)
Luminous Flux	500 lm
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	90 lm/W
Color Consistency	<4
Color rendering index (CRI)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %


Operating and Electrical	
Input Frequency	60 Hz
Power Consumption	5.5 W
Lamp Current (Nom)	62 mA
Wattage Equivalent	60 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.7
Voltage (Nom)	120 V
Controls and Dimming	
Dimmable	Only with specific dimmers
Mechanical and Housing	
Bulb Finish	Clear
Bulb Material	Glass
Bulb Shape	ST19

Classic filament LED bulbs

UL Wet/ damp/ dry location	Wet location
Net Weight (Piece)	0.044 kg
Approval and Application	
EU RoHS compliant	Yes
T20 compliant	Yes
Ambient temperature range	-20 to +45 °C
Application Conditions	
can it be used in closed luminaires	No


Product Data	
Order product name	5.5ST19/VIN/927/E26/CL/G/SP D 1PF T20
Full product name	5.5ST19/VIN/927/E26/CL/G/SP D 1PF T20
Order code	929002989003
Material Nr. (12NC)	929002989003
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677565831
Numerator - Packs per outer box	4
EAN/UPC - Case	50046677565836

Dimensional drawing

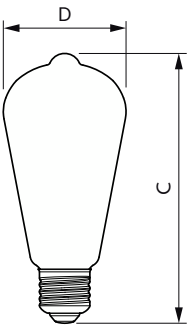


Product	D	C
5.5ST19/VIN/927/E26/CL/G/SP D 1PF T20	64 mm	137 mm

Photometric data

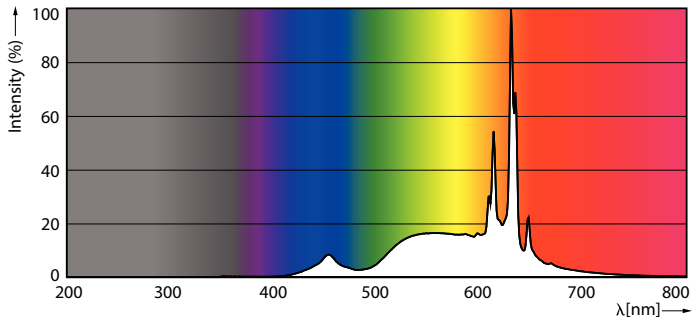


Spectral Power Distribution Colour - 5.5ST19/VIN/927/E26/CL/G/SP D 1PF T20

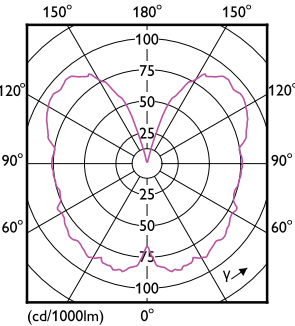

Light Distribution Diagram - 5.5ST19/VIN/927/E26/CL/G/SP D 1PF T20


Classic filament LED bulbs

Photometric data




General uniform lighting - 5.5ST19/VIN/927/E26/CL/G/SP D 1PF T20

Lifetime

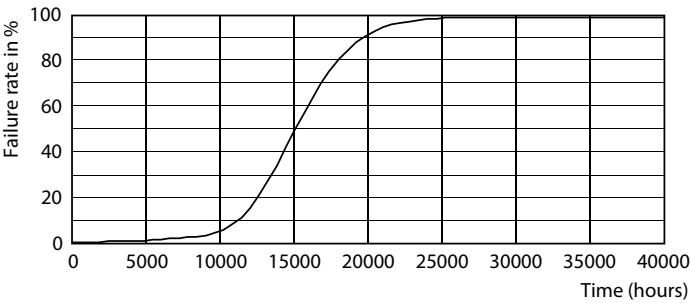

Life Expectancy Diagram

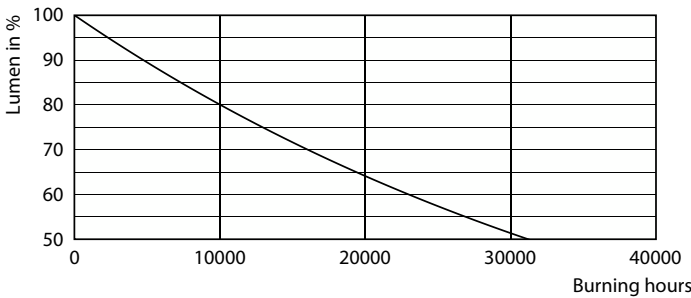

Lumen Maintenance Diagram - 5.5ST19/VIN/927/E26/CL/G/SP D 1PF T20

