

Heavy Duty, Commercial Grade GFCI USB
Receptacle, Dual C Ports, Tamper-
Resistant, 15A 125V, White

By Hubbell Wiring Device-Kellems
Catalog # [GFUSB15CW](#)

Spec Grade, 5-15R AUTOGUARD® Self-Testing, Self-Grounding
GFCI USB

Features

- High Power 3.0 Amp, 5 Volt USB Output
- CLAD® Protection: Filters out harmonics and transient noise for precise ground fault detection.
- AutoGuard® Self-Test: Automatically tests GFCI function every 30 seconds for ongoing safety.
- Dual USB Ports: Stainless steel construction rated for 10,000 cycles
- Tamper-Resistant Shutters: Patented mechanism protects against foreign object insertion.
- Triple Wipe Construction for enhanced blade contact and long lasting plug retention
- Hubbell Quality: Engineered for long-term durability in residential, commercial, and institutional settings.

Application

Kitchens, Bathrooms, Outdoors

Specifications


Industry Standard(s)	Meets All NEC® Requirements
Environmental Conditions	Indoor Dry unless protected by additional means
EU RoHS Indicator	Contact Manufacturer
Nema Rating	5-15R

Conductor

Number Of Wires	3-Wire
Wire Size	#14 AWG to #10 AWG
Number Of Poles	2-Pole

Current

Phase	Single Phase
Dielectric Strength	Withstands 1,500V minimum

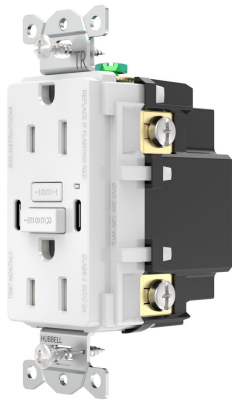

Amperage Rating	15 A
Voltage Rating	125 V

Dimensions

Size	2.18x1.74x4.12
------	----------------

General

Insulation	UL Standards
Type	Tamper-Resistant
Series	Heavy Duty
Material	Thermoplastic/Composite
Specifications	• Base - Nylon • Face - Nylon • Ground Contacts - Brass • Mounting Screws - Zinc plated steel • Mounting Strap - Galvanized Steel • Power Contacts - Brass
UPC	883778933356
Style	• GFCI • USB
Color	White
Mounting Type	Screw Mount

Logistics

Carton Quantity	10
-----------------	----

Operational

Temperature Rating	-35°C to 66°C or -30°F to 150°F
--------------------	---------------------------------

Product Assets

[Installation Manual \[English\]](#)