
TEMPBAY-130

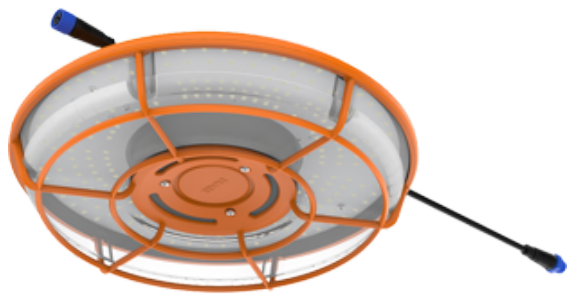

Weight: 4.4 lbs

Project:	**Type:**
Prepared By:	**Date:**

Driver Info

Type	Constant Current
120V	1.03A
208V	0.62A
240V	0.55A
277V	0.49A
Input Watts	130W

LED Info

Watts	130W
Color Temp	5000K
Color Accuracy	80 CRI
L70 Lifespan	50,000 Hours
Lumens	15,304 lm
Efficacy	121.82

Technical Specifications

Performance

Product Type:
UFO High Bay Temp Light

Description :
Highbay temporary construction lighting that is linkable, high output and versitle enough for any construction project

Wattage Equivalency:
400W Metal Halide

Input Wattage:
130W

Lumens:
15,304lm

Efficacy:
121.82lm/W

L70 Lifespan:
50,000-Hour LED lifespan based on IES LM-70 results

Electrical

Driver:
Constant Current Class 1 Driver

THD:
≤25%

Power Factor:
≥0.9

Dimmable:
No

Input Voltage:
120-277V

Operating Frequency:
50/60Hz

Input Current @ 120V (mA):
1030mA

Input Current @ 208V (mA):
620mA

Input Current @ 240V (mA):
550mA

Input Current @ 277V (mA):
490mA

Operating Temperature:
-20°F to 113°F (-30°C to 45°C)

Flicker:
≤30%

Surge Protection:
4 kV

Other

3-Year Limited Warranty:
The RAB 3-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty

LED Characteristics

Beam Angle:
180°

Color Temperature:
5000K

Color Accuracy (CRI):
>80 CRI

Color Consistency:
<7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Installation

Hardware:
Comes with 1 ft 120V plug with M15 waterproof Connector, or 1Ft hard wire cable

Copyright © 2025 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

Technical Specifications (continued)

Mounting:
Comes with caribinear hook for simple mounting

Plug:
18/3 AWG SJOW Cable with M15 waterproof connector
Male port with 6 ft of cable
Female port with .39 ft of cable

Linkable:
120V - 6 pcs, Max 640W
277V - 14 pcs, Max 1260W

Construction

Housing Finish:
Construction Orange

Lens:
Clear impact resistant Polycarbonate lens

Housing:
Die-cast aluminum housing with integrated waterproof on/off switch

Compliance

Listings:
UL1598

Environment:
Suitable for use indoors and outdoors in dry, damp, or wet environments.

California Energy Commission (CEC) Status:
Lawful for Sales in California

RoHS:
Mercury and UV free. RoHS-compliant components.


FCC:
Complies with Part 15 of the FCC Rules

Trade Agreements Act Compliant:
This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

Copyright © 2025 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

TEMPBAY-130

Dimensions

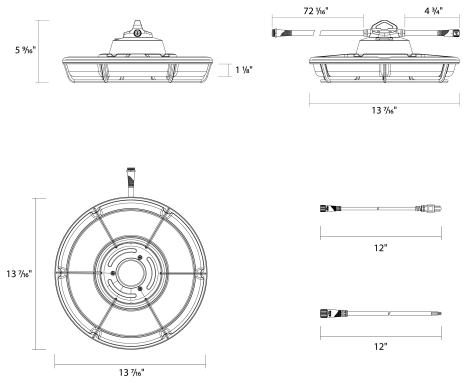

Features

- Temporary UFO Highbay great for industrial applications
- Over 15,000 lumens and super bright 5000K CCT
- Robust die-cast aluminum construction with clear polycarbonate lens
- Linkable SJOW cord with water tight quick connectors to daisy chain fixtures
- 120-277V Driver, 4kV Surge protection, and IP65 Rated
- Comes with 120V NEMA 5-15 Plug and Hard Wire cable in box
- 120-277V NEMA Plug and 25FT Extension cable sold separately

Ordering Matrix

Family	Wattage	CRI/Color Temp	Voltage	Finish
TEMPBAY	130			
	130 = 130W, (15,600lm)	**Blank =** 80 CRI, 5000K	**Blank =** 120-277V	**Blank =** Orange

Copyright © 2025 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice