
ND22-RFRAME

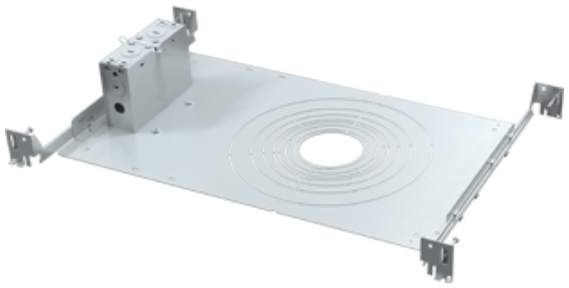

Weight: 47.2 lbs

Project:	**Type:**
Prepared By:	**Date:**

Driver Info

Type	Constant Current, Class A
120V	N/A
208V	N/A
240V	N/A
277V	N/A
Input Watts	N/A

LED Info

Watts	N/A
Color Temp	N/A
Color Accuracy	N/A
L70 Lifespan	50,000 Hours
Lumens	N/A
Efficacy	N/A

Technical Specifications

Performance

Product Type:
New Construction Housing

Description:
Modular commercial downlights with field-adjustable wattage, CCT, and optics. Select from various interchangeable modules, trims, and accessories.

Electrical

Controls:
Can accept LCBAUX Controller

Construction

Trim Size:
Compatible with 3", 4", 6", 8" & 10" trim reflectors

Compliance

IC Rated:
No


Trade Agreements Act Compliant:
This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

Other

5-Year, No-Compromise Warranty:
RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Copyright © 2025 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

Dimensions

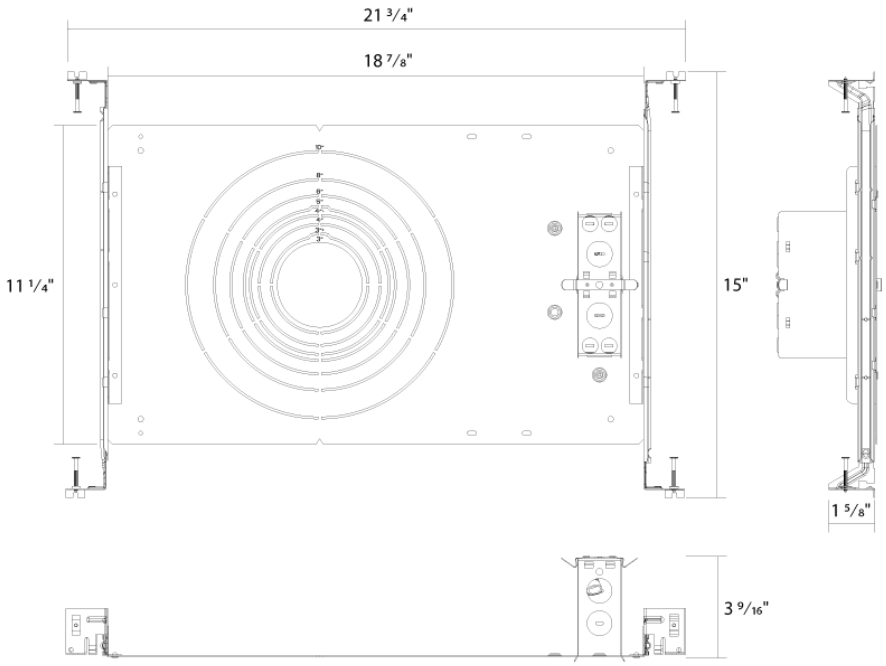

Ordering Matrix

Family	Shape	Controls
ND22	RFRAME	

RFRAME = New construction frame for Round Trims
SFRAME = New construction frame for Square Trims

Blank = None
/LCB = Lightcloud Blue

Copyright © 2025 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice