
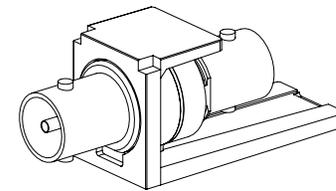
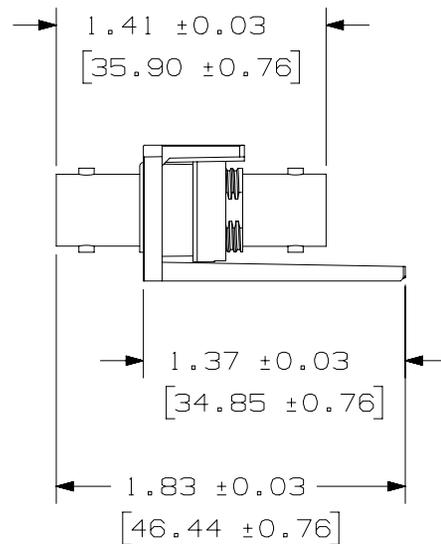
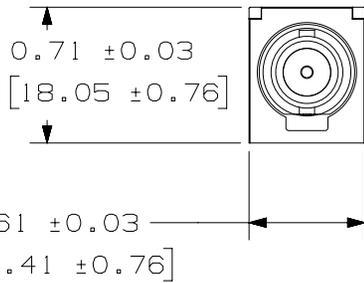


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
CMBA75**Y	3.58 lbs./100pcs. [1629g]/100pcs.

NOTES:

- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A LIST OF CURRENT PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
- DIMENSIONS IN [] ARE METRIC.
- FOR FREQUENCY RANGE FROM 10-250MHz, WITH MEASUREMENTS CALCULATED AT 250MHZ, TYPICAL RESULTS ARE INDUCTANCE 9.18nH, CAPACITANCE 1.6pF.
- PART INCLUDES:
1- MODULE BASE
1- 75ohm BNC COUPLER (ASSEMBLED TO MODULE BASE)
1- LOCK WASHER
1- ROUND SPANNER NUT
- MATERIALS:
COUPLER BODY- NICKEL PLATED
COUPLER INSULATOR- PLASTIC
COUPLER CONTACT- GOLD PLATED
MODULE BASE- PLASTIC

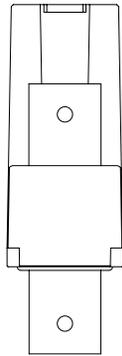

PART NUMBER		CMBA75**Y		
TITLE				
MINI-COM 75 OHM BNC COUPLER				
CUSTOMER DRAWING				
ITEM REVISION NAME		02699NAB/00		
DATASET FILE NAME		02699NAB_DC/00A		
		THIRD ANGLE PROJECTION		
MATERIAL		SEE NOTE 5		
DRAWING NUMBER		02699NAB-DC		
REV	DATE	BY	CHK	APR
00A	10-27-25	MDJR	ROJC	JESA
DRAWING REVISED, PREVIOUS REVISIONS OMITTED.				
02699NAB-DC				
REV	DATE	BY	CHK	APR
DESCRIPTION				
ECN				
DRAWN BY	DATE	CHK	SCALE	SIZE
JSP	4-26-06	MJD	1:1	A
SHEET 1 OF 1				

A-SIZE CUSTOMER

2

1

2

1