

WIREMOLD° Evolution™ Series 8" Poke-Thru Devices



The interior of the Evolution" Series 8" Poke-Thru Device.

Evolution Series –The most innovative poke-thru devices in the market

Designed for retrofit and new construction, Evolution Series 8" Poke-Thru devices provide convenient access to power, communications, and A/V services recessed below floor level - providing maximum device protection. With five gangs of capacity that allow you to configure services for the needs of your space, services can be placed in any location within the unit.

The low-profile durable metal covers are available in six finishes, designed to match any space. The cover also features sliding doors that allow cables to neatly egress from the unit, protecting cables while reducing tripping hazards.

Evolution Series 8" Poke-Thru devices are the perfect fit for meeting and training rooms, classrooms, healthcare facilities or commercial buildings with open-space architecture.

Features & Benefits

- Recessed devices. Five (5) compartments for power, communications, and/or A/V devices, all recessed 4" (102mm) below the floor level, providing maximum protection and device longevity.
- Die-cast aluminum cover assemblies. The Evolution Series poke-thru design includes all metal die-cast aluminum cover assemblies, available in powder coated finishes of black, gray, and bronze, as well as a brushed aluminum, satin brass plated and satin nickel plated finishes.
- A/V compatible design. The 8AT Series devices are designed to work with with Legrand's AVIP devices. Also compatible with most A/V manufacturers devices including their 1-gang, 2-gang, and 3-gang decorator style designs.
- Flush tile version cover assemblies. A flush style cover for tile applications allows the Evolution Series Poke-Thru Devices to be adjusted to the same level as the top surface of the floor covering. The tile cover is designed to be used in higher traffic applications, where a low profile is a must.
- Auto-close egress doors. Egress doors lock in position when slid open and automatically close around cables, reducing the egress opening to the smallest size possible.
- Improved hinge design. Provides greater durability while creating a more fluid, intuitive, opening and closing motion.

- "Step-on-it" installation. Quick and easy installation without the need for additional fasteners or a second installer.
- Pre-pour sleeve. Creates a removable cast-in-place core hole that allows the contractor to position poke-thru units before concrete is poured. Eliminates the cost and labor of coring the opening.
- TopGuard™ Protection. All Evolution Series Poke-Thru
 Devices, like every Wiremold Poke-Thru Device, meet and
 exceed UL scrub water exclusion requirements for tile,
 carpet, and wood covered floors.
- Meets ADA Accessibility Guidelines. Wide trim flange is designed to meet the ADA Accessibility Guidelines as it pertains to ADA Standard 4.5 which addresses changes in floor and ground surface levels. The poke-thru trim flanges are beveled so the slope is no greater than 1:2 ratio.
- Suitable for use in air handling spaces. In accordance with Sec 300-22(C) of the National Electrical Code.
- UL Listed and UL Fire Classified to U.S. and Canadian safety standards. UL Fire rated for up to 2-hour rated floors maintains the fire classification of the floor.
- BAA compliant. Durable finish SKUs are available in BAA compliant versions when needed. See product notes on how to order BAA compliant products.

Vertical Markets

Commercial

Education

Healthcare

Hospitality

Entertainment

Retail



Download this product's PEP ecopasport, environmental product declaration at www.legrand.us/resources-and-downloads. This declaration conforms with ISO 14025 and 14040 and is in alignment with EN 15804.

Compliance



cULus Listed, Metallic Outlet Box File Number E2961. Guide QCIT. cULus Listed Nonmetallic Outlet Boxes & Fittings Classified for Fire Resistance: File R8209, Guide CEYY.

For more information or to configure your own Evolution™ Series Poke-Thru Device, visit our online configurator at:

www.legrand.us/wiremold/evolution.



Evolution™ Series 8" Poke-Thru Devices

Cabling Specifications

Copper Cross Section:

The copper cross-sectional area determines the amount of wire fill capacity in a poke-thru device. Unlike other wire and cable management systems that utilize wire fill capacity, a poke-thru device is UL tested under fire conditions to determine the maximum amount of copper conductors that will pass through a poke-thru device, while maintaining the fire-rating of the floor assembly. All Legrand Poke-Thru Devices are UL Classified to U.S. and Canadian safety standards.

8AT COPPER CROSS-SECTION

	OUTER CHANNELS	CENTER CHANNEL	
Max Copper X-Section	0.0154 sq. in. (9.9mm²)	0.0775 sq. in. (16.60mm²)	
Max # Conductors	(3) 12 AWG	(24) 14 AWG	

NOTE: When using conductor sizes other than listed above, the aggregate cross-sectional area of the copper conductors shall not exceed the cross-sectional area listed.



Copper Cross-Sectional Area of Commonly Used Conductors					
Size	Solid				
#24	0.00032 sq. in.	(.206mm²)			
#23	0.00040 sq. in.	(.258mm²)			
#22	0.00050 sq. in.	(.322mm²)			
#14	0.00323 sq. in.	(2.083mm ²)			
#12	0.00512 sq. in.	(3.303mm ²)			
#10	0.00815 sq. in.	(5.258mm²)			
# 8	0.01296 sq. in.	(8.361mm ²)			

NOTE: Use above values for solid or stranded conductors.

Flooring Specifications

8AT CORE HOLE SIZES

FLOOR TYPE	CORE SIZE (Min.)		CORE SIZE (Max.)	
Covered Floors (Carpet, Tile or Wood)	8"	(203mm)	8 1/8"	(206mm)
Bare Concrete or Terrazzo	8"	(203mm)	8 1/8"	(206mm)

CAUTION: These devices are suitable for 1-, 11/2-, and 2-hour rated floor assemblies as described in the UL Fire Resistance directory for each service.

These devices meet all UL scrub water requirements, but are not suitable for wet or damp locations, or other areas subject to saturation with water or other liquids, such as commercial kitchens.

Floor Coverings: The poke-thru device is fire rated for concrete floor coverings. For floor coverings greater than

1" (25mm), consult factory.

UL Certification: To view the UL certification, please visit www.UL.com/Database. Enter "Wiremold" as the

company name and "CEYY" as the UL Category Code.

Poke-thru devices and abandonment fittings are for use with 1-, 11/2-, or 2-hour rated unprotected reinforced concrete floor and 1-, 11/2- or 2-hour rated floors employing unprotected steel floor units and concrete topping (D900-Series Designs), or concrete floors with suspended ceilings. (Fire resistive designs with suspended ceilings should have provisions for accessibility in the ceiling area below the poke-thru fittings.)

The assembled Poke-Thru stem and service fitting or the abandonment fittings will not reduce the ratings of the floor assembly when the thickness and type of concrete (required for the specific rating) are within the specified limits and the fittings are installed as specified:

1. Spacing – Minimum of 2' (610mm) OC and not more than one unit per 65 square feet (6 square meters) of floor area in each span.

2. Concrete
 Minimum thickness of structural concrete topping of 2 1/4" (57mm) over metal deck or a minimum 3" thick reinforced concrete slab. Unit weight of concrete to be 110 to 155 pcf.

3. Installation – Mounted in a 8" (203mm) diameter core drilled hole in concrete per installation instructions accompanying the fittings or abandonment fittings. For use with power circuits, data and/or telephone cables as tabulated below.

NOTE: The material that is used in Wiremold' poke-thru devices is not listed under the directory for Fire Stopping Material because the poke-thru device is UL Classified as "Outlet Boxes and Fittings Classified For Fire Resistance (CEYY)". The pass/fail criteria comes from UL263. The pass criteria is that the poke-thru unit cannot exceed 325° F. above ambient before the concrete slab (or deck) reaches this same temperature. Some poke-thru devices are tested for 2 hours while others are tested for 4 hours. The intumescent material has never been tested as a fire-stopping material as a stand-alone device. This material is designed to work as a unit with the entire poke-thru device.



Evolution Series 8" Poke-Thru Devices Ordering Information

Catalog No./Item

Powder Coat Finishes:

8ATC2PBK 8ATC2PBZ 8ATC2PGY


Durable Finishes

8ATC2PAA*

8ATC2PSB* 16 1/4"

8ATC2PSN* (412mm)

*NOTE: Durable finishes are available as BAA product with -NA suffix.



NOTE: UL Fire Classified for up to 2-hour rated floors.

NOTE: Receptacles can be wired as a standard or isolated ground device.

NOTE: BAA versions contain non-Tamper Resistant receptacles

Description/Specifications

Recessed Prewired Surface Style Poke-Thru Assembly -

- Designed to be installed in a concrete floor which has access in the ceiling of the floor below for running power, data and A/V services.
- Poke-thru device installs into an 8" (203mm) to an 8 1/8" (206mm) diameter hole.
- The unit comes complete with a surface style cover, two (2) pre-wired, pre-installed duplex receptacles, and three (3) open compartments for additional power, data or AV devices.
- All five compartments are recessed 4" (102mm) below the floor surface level.
- The surface style cover is an aluminum cover that is designed to sit on top of finished floor surfaces, such as: carpet, tile, wood, polished concrete or terrazzo.
- · Covers are available in six finishes
 - Three powder coat finishes: black (BK), gray (GY), and bronze (BZ)
 - Three durable finishes: brushed aluminum (AA), satin brass plated (SB), and satin nickel plated (SN)

INCLUDED

For Side Compartments:


Two (2) proprietary Tamper-Resistant 20A Duplex Receptacles installed

For Center Compartment:

No Device Plates are included

For Bottom Feed Compartment:

- One (1) 5BLH 1/2-Gang Blank Housing*
- Three (3) 1PTHA 1-Gang Pass-Through Housing Assembly
- One (1) 575CHA 1/2-Gang 3/4" Conduit Housing Assembly**
- One (1) 8DIV 8" Divider

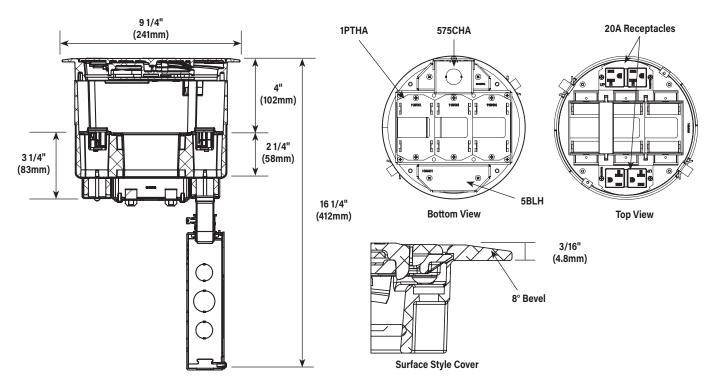

CAUTION: Receptacle supplied with this Poke-Thru is not suitable for direct field wiring. Contact manufacturer for replacement. Field modifications will void UL Listing and Classification. Replacement receptacle is limited to this manufacturers' Catalog No. 68REC

- * Tunneling extends from the 5BLH to 575CHA so that power cables from the 20A duplex receptacle mounted on the left side of the poke-thru device are run into the junction box attached to the 575CHA.
- ** Includes junction box attached to the 3/4" trade size conduit.



Evolution Series 8" Poke-Thru Devices Ordering Information

000

Catalog No./Item

Powder Coat Finishes 8ATC2PCRBK 8ATC2PCRBZ 8ATC2PCRGY

Durable Finishes

8ATC2PCRAA*

8ATC2PCRSB* 16 1/4"

8ATC2PCRSN* (412mm)

*NOTE: Durable finishes are available as BAA product with -NA suffix.



NOTE: Receptacles can be wired as a standard or isolated ground device.

NOTE: BAA versions contain non-Tamper Resistant receptacles

Description/Specifications

Recessed Prewired Surface Style Poke-Thru Assembly -

- Designed to be installed in a concrete floor which has access in the ceiling of the floor below for running power, data and A/V services.
- Poke-thru device installs into an 8" (203mm) to an 8 1/8" (206mm) diameter hole.
- The unit comes complete with a surface style cover, one (1) pre-wired, pre-installed duplex receptacle, one (1) prewired, pre-installed 20A proprietary duplex receptacle marked with a permanent "Controlled Receptacle" marking, and three (3) open compartments for additional power, data or AV devices.
- All five compartments are recessed 4" (102mm) below the floor surface level.
- The surface style cover is an aluminum cover that is designed to sit on top of finished floor surfaces, such as: carpet, tile, wood, polished concrete or terrazzo.
- Covers are available in six finishes
 - Three powder coat finishes: black (BK), gray (GY), and bronze (BZ)
- Three durable finishes: brushed aluminum (AA), satin brass plated (SB), and satin nickel plated (SN)

INCLUDED

For Side Compartments:


- One (1) proprietary Tamper-Resistant 20A Duplex Receptacle
- One (1) proprietary Tamper-Resistant 20A Duplex Receptacle marked with a permanent "Controlled Receptacle"

For Center Compartment:

No Device Plates are included

For Bottom Feed Compartment:

- One (1) 5BLH 1/2-Gang Blank Housing*
 - Three (3) 1PTHA 1-Gang Pass-Through Housing Assembly
- One (1) 575CHA 1/2-Gang 3/4" Conduit Housing Assembly**

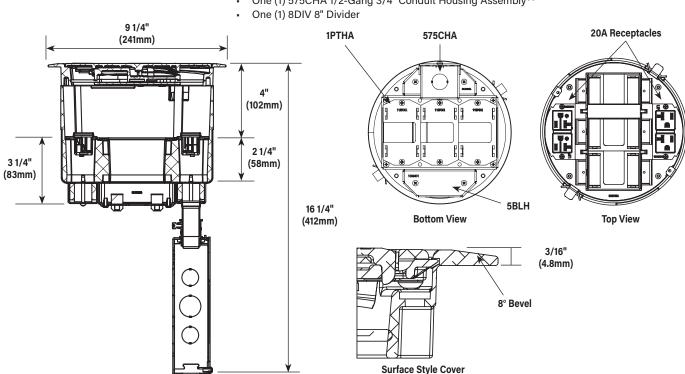

CAUTION: Receptacle supplied with this Poke-Thru is not suitable for direct field wiring. Contact manufacturer for replacement. Field modifications will void UL Listing and Classification. Replacement receptacle is limited to this manufacturers' Catalog No. 68REC

- * Tunneling extends from the 5BLH to 575CHA so that power cables from the 20A duplex receptacle mounted on the left side of the poke-thru device are run into the junction box attached to the 575CHA.
- ** Includes junction box attached to the 3/4" trade size conduit.



Evolution Series 8" Poke-Thru Devices Ordering Information

Catalog No./Item

Powder Coat Finishes 8AT2PBK 8AT2PBZ 8AT2PGY Durable Finishes 8AT2PAA* 8AT2PSB* (412mm) 8AT2PSN* *NOTE: Durable finishes are available as BAA product

NOTE: UL Fire Classified for up to 2-hour rated floors.

NOTE: Receptacles can be wired as a standard or isolated ground device.

NOTE: Includes one (1) 8TS Tile

Shim.

with -NA suffix.

NOTE: BAA versions contain non-Tamper Resistant

receptacles

Description/Specifications

Recessed Prewired Flush Style Poke-Thru Assembly -

- Designed to be installed in a concrete floor which has access in the ceiling of the floor below for running power, data and A/V services.
- Poke-thru device installs into an 8" (203mm) to an 8 1/8" (206mm) diameter hole.
- The unit comes complete with a flush style cover, two (2) pre-wired, pre-installed duplex receptacles, and three (3) open compartments for additional power, data or AV devices.
- All five compartments are recessed 4" (102mm) below the floor surface level.
- The flush style cover is an aluminum cover that is designed to sit flush with finished floor coverings such as: carpet, tile, wood and terrazzo.***
- · Covers are available in six finishes
 - Three powder coat finishes: black (BK), gray (GY), and bronze (BZ)
 - Three durable finishes: brushed aluminum (AA), satin brass plated (SB), and satin nickel plated (SN)

INCLUDED

For Side Compartments:


• Two (2) proprietary Tamper-Resistant 20A Duplex Receptacles installed

For Center Compartment:

No Device Plates are included

For Bottom Feed Compartment:

- One (1) 5BLH 1/2-Gang Blank Housing*
- Three (3) 1PTHA 1-Gang Pass-Through Housing Assembly
- One (1) 575CHA 1/2-Gang 3/4" Conduit Housing Assembly**
- One (1) 8DIV 8" Divider

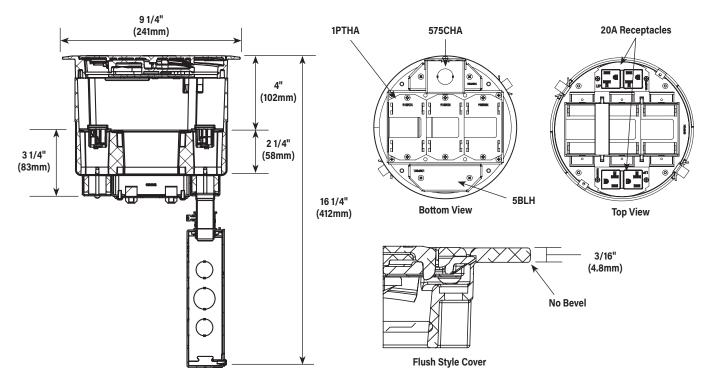

CAUTION: Receptacle supplied with this Poke-Thru is not suitable for direct field wiring. Contact manufacturer for replacement. Field modifications will void UL Listing and Classification. Replacement receptacle is limited to this manufacturers' Catalog No. 68REC

- * Tunneling extends from the 5BLH to 575CHA so that power cables from the 20A duplex receptacle mounted on the left side of the poke-thru device are run into the junction box attached to the 575CHA.
- ** Includes junction box attached to the 3/4" trade size conduit.
- *** Requires 8CT-CTR terrazzo ring to be installed first.



Evolution Series 8" Poke-Thru Devices Ordering Information

Catalog No./Item

Powder Coat Finishes 8AT2PCRBK 8AT2PCRBZ 8AT2PCRGY **Durable Finishes** 8AT2PCRAA* 16 1/4" 8AT2PCRSB*

8AT2PCRSN*

*NOTE: Durable finishes are available as BAA product with -NA suffix.

NOTE: UL Fire Classified for up to 2-hour rated floors.

NOTE: Receptacles can be wired as a standard or isolated ground device.

NOTE: Includes one (1) 8TS Tile Shim.

NOTE: BAA versions contain non-Tamper Resistant receptacles

Description/Specifications

Recessed Prewired Flush Style Poke-Thru Assembly -

- Designed to be installed in a concrete floor which has access in the ceiling of the floor below for running power, data and A/V services.
- Poke-thru device installs into an 8" (203mm) to an 8 1/8" (206mm) diameter hole.
- The unit comes complete with a flush style cover, one (1) pre-wired, pre-installed duplex receptacle, one (1) prewired, pre-installed 20A proprietary duplex receptacle marked with a permanent "Controlled Receptacle" marking, and three (3) open compartments for additional power, data or AV devices.
- All five compartments are recessed 4" (102mm) below the floor surface level.
- The flush style cover is an aluminum cover that is designed to sit flush with finished floor coverings such as: carpet, tile, wood and terrazzo.***
- · Covers are available in six finishes
 - Three powder coat finishes: black (BK), gray (GY), and bronze (BZ)
 - Three durable finishes: brushed aluminum (AA), satin brass plated (SB), and satin nickel plated (SN)

INCLUDED

For Side Compartments:


- One (1) proprietary Tamper-Resistant 20A Duplex Receptacle
- One (1) proprietary Tamper-Resistant 20A Duplex Receptacle marked with a permanent "Controlled Receptacle"

For Center Compartment:

No Device Plates are included

For Bottom Feed Compartment:

- One (1) 5BLH 1/2-Gang Blank Housing*
- Three (3) 1PTHA 1-Gang Pass-Through Housing Assembly
- One (1) 575CHA 1/2-Gang 3/4" Conduit Housing Assembly**
- One (1) 8DIV 8" Divider

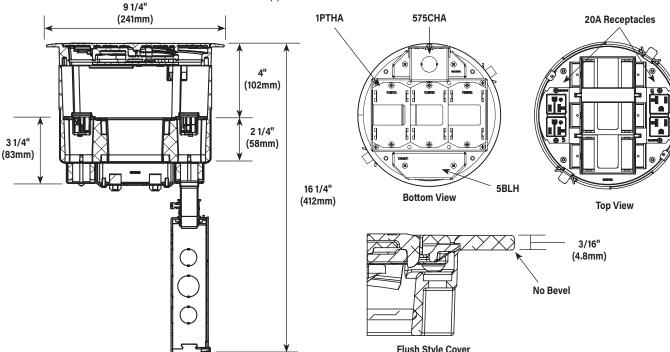

CAUTION: Receptacle supplied with this Poke-Thru is not suitable for direct field wiring. Contact manufacturer for replacement. Field modifications will void UL Listing and Classification. Replacement receptacle is limited to this manufacturers' Catalog No. 68REC

- * Tunneling extends from the 5BLH to 575CHA so that power cables from the 20A duplex receptacle mounted on the left side of the poke-thru device are run into the junction box attached to the 575CHA.
- ** Includes junction box attached to the 3/4" trade size conduit.
- *** Requires 8CT-CTR terrazzo ring to be installed first.



Evolution Series 8" Poke-Thru Devices Ordering Information

Catalog No./Item

Powder Coat Finishes 8ATC2BK 8ATC2BZ

Durable Finishes 8ATC2AA*

8ATC2GY

*NOTE: Durable finishes are available as BAA product



NOTE: UL Fire Classified for up to 2-hour rated floors.

Description/Specifications

Recessed Unwired Surface Style Poke-Thru Assembly -

- Designed to be installed in a concrete floor which has access in the ceiling of the floor below for running power, data and A/V services.
- Poke-thru device installs into an 8" (203mm) to an 8 1/8" (206mm) diameter hole.
- The unit comes complete with a surface style cover, and five (5) open compartments for additional power, data or AV devices.
- All five compartments are recessed 4" (102mm) below the floor surface level.
- The surface style cover is an aluminum cover that is designed to sit on top of finished floor surfaces such as: carpet, tile, wood, polished concrete or terrazzo.
- Covers are available in six finishes
 - Three powder coat finishes: black (BK), gray (GY), and bronze (BZ)
 - Three durable finishes: brushed aluminum (AA), satin brass plated (SB), and satin nickel plated (SN)

INCLUDED

For Side Compartments:


No Device Plates are included

For Center Compartment:

No Device Plates are included

For Bottom Feed Compartment:

- One (1) 5PTHA 1/2-Gang Pass-Through Housing Housing
- Three (3) 1PTHA 1-Gang Pass-Through Housing Assembly
- One (1) 575CHA 1/2-Gang 3/4" Conduit Housing Assembly**
- One (1) 8DIV 8" Divider

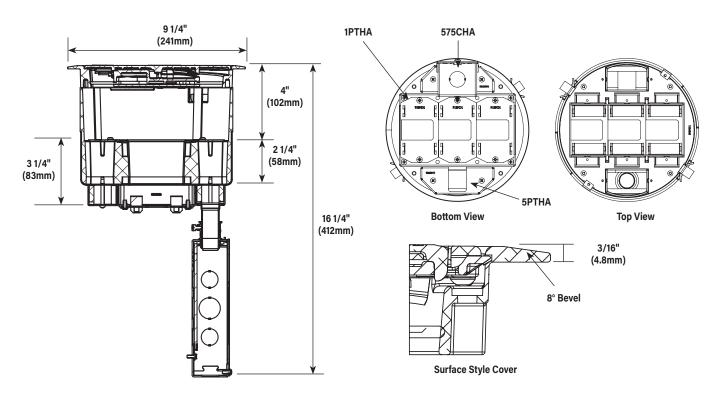

^{**} Includes junction box attached to the 3/4" trade size conduit.



Evolution Series 8" Poke-Thru Devices Ordering Information

Catalog No./Item

Powder Coat Finishes 8AT2BK

8AT2BZ 8AT2GY

Durable Finishes

8AT2AA* 8AT2SB* 8AT2SN*

16 1/4" (412mm)

*NOTE: Durable finishes are available as BAA product with -NA suffix.

NOTE: UL Fire Classified for up to 2-hour rated floors.

NOTE: Includes one (1) 8TS Tile Shim.

Description/Specifications

Recessed Unwired Flush Style Poke-Thru Assembly -

- Designed to be installed in a concrete floor which has access in the ceiling of the floor below for running power, data and A/V services.
- Poke-thru device installs into an 8" (203mm) to an 8 1/8" (206mm) diameter hole.
- The unit comes complete with a flush style cover, and five (5) open compartments for additional power, data or AV devices.
- All five compartments are recessed 4" (102mm) below the floor surface level.
- The flush style cover is an aluminum cover that is designed to sit flush with finished floor coverings such as: carpet, tile, wood and terrazzo****
- · Covers are available in six finishes
 - Three powder coat finishes: black (BK), gray (GY), and bronze (BZ)
 - Three durable finishes: brushed aluminum (AA), satin brass plated (SB), and satin nickel plated (SN)

INCLUDED

For Side Compartments:


No Device Plates are included

For Center Compartment:

No Device Plates are included

For Bottom Feed Compartment:

- One (1) 5PTHA 1/2-Gang Pass-Through Housing Housing
- Three (3) 1PTHA 1-Gang Pass-Through Housing Assembly
- One (1) 575CHA 1/2-Gang 3/4" Conduit Housing Assembly**
- One (1) 8DIV 8" Divider

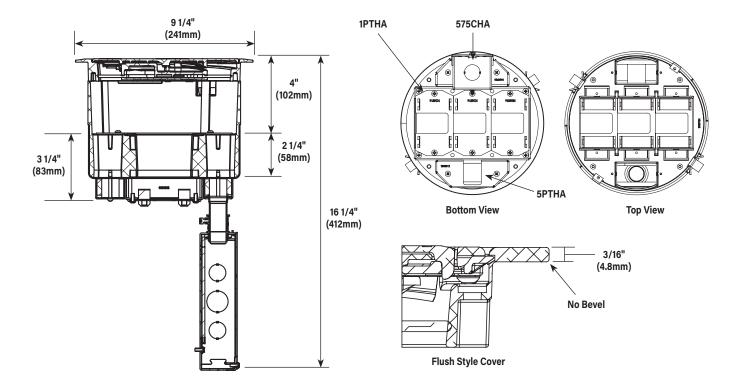

- ** Includes junction box attached to the 3/4" trade size conduit.
- *** Requires 8CT-CTR terrazzo ring to be installed first.




Evolution™ Series 8" Poke-Thru Devices

Evolution Series 8" Poke-Thru Devices Ordering Information

Catalog No./Item

Powder Coat Finishes 8ATCFFBK 8ATCFFBZ 8ATCFFGY 8" (203mm)

Durable Finishes 8ATCFFAA 8ATCFFSB 8ATCFFSN



NOTE: UL Fire Classified for up to 2-hour rated floors

Description/Specifications

Furniture Feed Assembly with Surface Style Cover -

- Designed to be installed in a concrete floor which has access in the ceiling of the floor below for running power, data and A/V services.
- Poke-thru device installs into an 8" (203mm) to an 8 1/8" (206mm) diameter hole.
- The unit comes complete with a surface style cover that includes one (1) 1" trade size screw plug opening and two (2) 2" trade size screw plug openings.
- The surface style cover is an aluminum cover that is designed to sit on top of finished floor surfaces, such as: carpet, tile, wood, polished concrete or terrazzo.
- · Covers are available in six finishes
- Three powder coat finishes: black (BK), bronze (BZ), gray (GY)
- Three durable finishes: brushed aluminum (AA), satin brass plated (SB), satin nickel plated (SN)
- Junction box sold separately, JB45C. Includes 1", 3/4", and 1/2" knockouts.

INCLUDED

For Side Compartments:


No Device Plates are included

For Center Compartment:

No Device Plates are included

For Bottom Feed Compartment:

· No Bottom Feed Plates are included

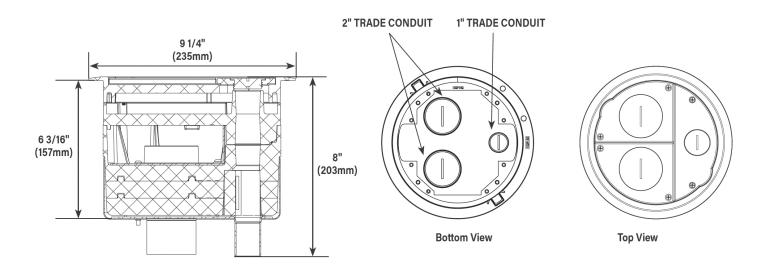


Evolution Series 8" Poke-Thru Devices Ordering Information

Catalog No./Item

Description/Specifications

8STC



Recessed Unwired Poke-Thru Stem Assembly -

- Designed to be installed in a concrete floor which has access in the ceiling of the floor below for running power, data and A/V services.
- Poke-thru device installs into an 8" (203mm) to an 8 1/8" (206mm) diameter hole.
- The unit comes complete with a disposable sheet metal cover, five (5) open compartments for additional power, data or AV devices.
- All five compartments are recessed 4" (102mm) below the floor surface level.
- Designed to work with the 8CTC2 and 8CT2 style covers (sold separately).

NOTE: UL Fire Classified for up to 2-hour rated floors.

INCLUDED

For Side Compartments:


No Device Plates are included

For Center Compartment:

No Device Plates are included

For Bottom Feed Compartment:

- One (1) 5PTHA 1/2-Gang Pass-Through Housing Housing
- Three (3) 1PTHA 1-Gang Pass-Through Housing Assembly
- One (1) 575CHA 1/2-Gang 3/4" Conduit Housing Assembly**
- One (1) 8DIV 8" Divider

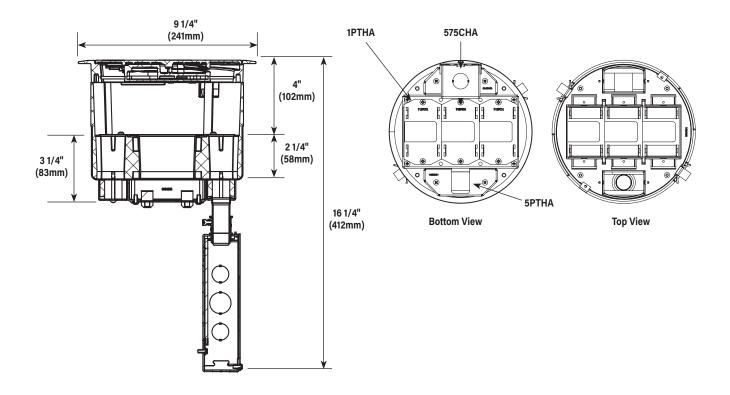

^{**} Includes junction box attached to the 3/4" trade size conduit.




Evolution Series 8" Poke-Thru Devices Ordering Information

Catalog No./Item

Description/Specifications

8STCP



Recessed Unwired Poke-Thru Stem Assembly -

- Designed to be installed in a concrete floor which has access in the ceiling of the floor below for running power, data and A/V services.
- Poke-thru device installs into an 8" (203mm) to an 8 1/8" (206mm) diameter hole.
- The unit comes complete with a disposable sheet metal cover, two (2) pre-wired, pre-installed duplex receptacles, and three (3) open compartments for additional power, data, or AV devices
- All five compartments are recessed 4" (102mm) below the floor surface level.
- Designed to work with the 8CTC2 and 8CT2 style covers (sold separately).

NOTE: UL Fire Classified for up to 2-hour rated floors.

NOTE: Receptacles can be wired as a standard or isolated ground device.

INCLUDED

For Side Compartments:


Two (2) proprietary Tamper-Resistant 20AMP Duplex Receptacles installed

For Center Compartment:

No Device Plates are included

For Bottom Feed Compartment:

- One (1) 5BLH 1/2-Gang Blank Housing
- Three (3) 1PTHA 1-Gang Pass-Through Housing Assembly
- One (1) 575CHA 1/2-Gang 3/4" Conduit Housing Assembly**
- One (1) 8DIV 8" Divider

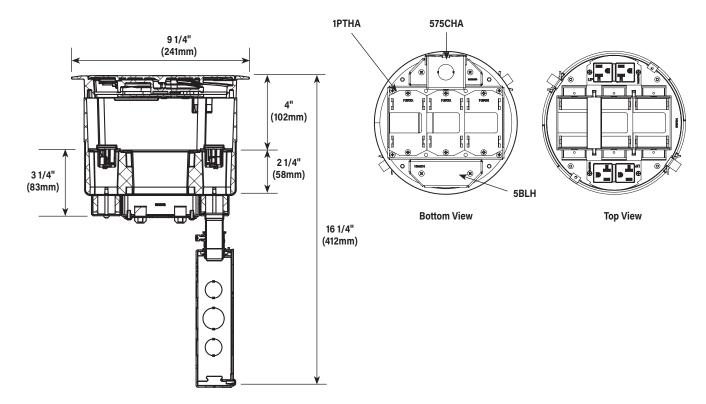

CAUTION: Receptacle supplied with this Poke-Thru is not suitable for direct field wiring. Contact manufacturer for replacement. Field modifications will void UL Listing and Classification. Replacement receptacle is limited to this manufacturers' Catalog No. 68REC

^{*} Tunneling extends from the 5BLH to 575CHA so that power cables from the 20A duplex receptacle mounted on the left side of the poke-thru device are run into the junction box attached to the 575CHA.

^{**} Includes junction box attached to the 3/4" trade size conduit.




Evolution™ Series 8" Poke-Thru Devices

Evolution Series 8" Poke-Thru Devices Ordering Information

Catalog No./Item

Description/Specifications


8STCFF



Recessed Unwired Poke-Thru Stem Assembly -

- Designed to be installed in a concrete floor which has access in the ceiling of the floor below for running power, data and A/V services.
- Poke-thru device installs into an 8" (203mm) to an 8 1/8" (206mm) diameter hole.
- The unit comes complete with a disposable sheet metal cover, one (1) 1" trade size conduit & two (2) 2" trade size conduit on bottom.
- Trade size openings provide a straight path through the poke thrus.
- Designed to work with the 8CFFTC style cover (sold separately).
- Junction box sold separately, JB45C. Includes 1", 3/4", and 1/2" knockouts.

NOTE: UL Fire Classified for up to 2-hour rated floors.

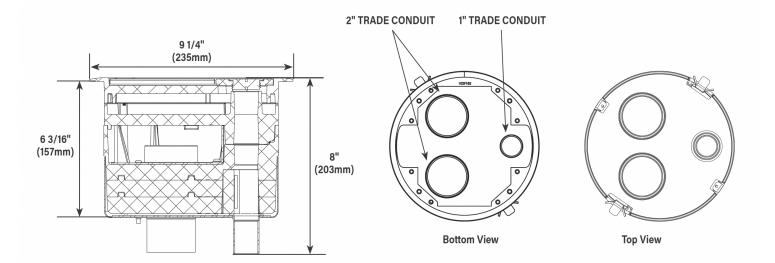



Evolution Series 8" Poke-Thru Devices Ordering Information

Catalog No./Item


Description/Specifications

ABPLUG8



Abandonment Plug Assembly -Complete abandonment plug assembly for 8" opening. Assembly includes intumescent fire stop material to maintain a 2 hour fire rating of the floor.

Catalog No./Item



Description/Specifications


8" Pre-Pour Poke-Thru Sleeve -Nonmetallic sleeve attaches to structural decking and maintains 8"- 8 1/8" diameter cast in core hole. Unit includes three (3) attachment legs, two (2) end caps and three (3) thumb screws.

Evolution Series 8" Poke-Thru Devices Cover Assemblies Ordering Information

Catalog No./Item

Powder Coat Finishes 8CTC2BK 8CTC2GY 8CTC2BZ

Durable Finishes 8CTC2AA* 8CTC2SB* 8CTC2SN*



*NOTE: Durable finishes are available as BAA product with -NA suffix.


Description/Specifications

Surface Style Cover Assembly -Low profile cover designed to attach to the 8STC and 8STCP Poke-Thru Stem Assemblies. Each cover is made from die-cast aluminum materials and equipped with a durable hinge which allows the cover to rotate open 180°, two (2) slide egress doors that lock in the open position and auto close around the cables when the covers are closed, an 8° beveled edge that meet ADA guidelines and reduces tripping hazards. These covers are designed to sit on top of the finished floor surfaces such as: carpet, tile, wood, polished concrete and terrazzo. Available in three (3) aesthetic powder coated finishes: black (BK), gray (GY), bronze (BZ) and three durable finishes: brushed aluminum (AA), satin brass plated (SB) and satin

Catalog No./Item

Powder Coat Finishes 8CTC2BKTR **8CTC2GYTR 8CTC2BZTR**


Durable Finishes 8CTC2AATR* 8CTC2SBTR* 8CTC2SNTR*



*NOTE: Durable finishes are available as BAA product with -NA suffix.


Description/Specifications

Tamper-Resistant Surface Style Cover Assembly - Low profile cover designed to attach to the 8STC and 8STCP Poke-Thru Stem Assemblies. Each cover is made from die-cast aluminum materials and equipped with a tamper-resistant screw to keep out unauthorized personnel, a durable hinge which allows the cover to rotate open 180°, two (2) slide egress doors that lock in the open position and auto close around the cables when the covers are closed, an 8° beveled edge that meet ADA guidelines and reduces tripping hazards. These covers are designed to sit on top of the finished floor surfaces such as: carpet, tile, wood, polished concrete and terrazzo. Available in three (3) aesthetic powder coated finishes: black (BK), gray (GY), bronze (BZ) and three durable finishes: brushed aluminum (AA), satin brass plated (SB) and satin nickel plated (SN).



NOTE: All surface style poke-thru devices come with a transition angle to aid in the change in floor elevation.

nickel plated (SN).






Evolution Series 8" Poke-Thru Devices Cover Assemblies Ordering Information

Catalog No./Item

Powder Coat Finishes 8CT2BK 8CT2GY 8CT2BZ


Durable Finishes 8CT2AA* 8CT2SB* 8CT2SN*



*NOTE: Durable finishes are available as BAA product with -NA suffix.

Description/Specifications


Flush Style Cover Assembly -Low profile covers that are designed to attach to the 8STC and 8STCP Poke-Thru Stem Assemblies. Each cover is made from die-cast aluminum materials and equipped with a durable hinge which allows the cover to rotate open 180°, two (2) slide egress doors that lock in the open position and auto close around the cables when the covers are closed. These covers are designed to sit flush with the finished floor surfaces such as: carpet, tile, wood and terrazzo.*** Available in three (3) aesthetic powder coated finishes: black (BK), gray (GY), bronze (BZ) and three durable finishes: brushed aluminum (AA), satin brass plated (SB) and satin nickel plated (SN).




NOTE: Includes 8TS Tile Shim.

Powder Coat Finishes 8CFFTCBK 8CFFTCGY 8CFFTCBZ

Durable Finishes 8CFFTCAA 8CFFTCSB 8CFFTCSN






Furniture Feed Cover Assembly -

Surface style, die-cast aluminum cover assembly, with one (1) 1" trade size screw plug opening, and two (2) 2" trade size screw plug openings. Cover assembly is available in three (3) powder coated finishes: black (BK), gray (GY), bronze (BZ) and also available in three (3) durable finishes: brushed aluminum (AA), satin brass plated (SB) and satin nickel plated (SN). **8CFFTC Series Cover Assemblies** designed for use with 8STCFF Poke-Thru Stem Assembly. Includes one (1) 1" and two (2) 2" trade size conduit fittings divided for separate services.

Catalog No./Item

Powder Coat Finishes 8CT2BKTR 8CT2GYTR 8CT2BZTR


Durable Finishes 8CT2AATR* 8CT2SBTR* 8CT2SNTR*



*NOTE: Durable finishes are available as BAA product with -NA suffix.

Description/Specifications

Tamper-Resistant Flush Style Cover Assembly - Low profile covers that are designed to attach to the 8STC and 8STCP Poke-Thru Stem Assemblies. Each cover is made from die-cast aluminum materials and equipped with a tamper-resistant screw to keep out unauthorized personnel, a durable hinge which allows the cover to rotate open 180°, two (2) slide egress doors that lock in the open position and auto close around the cables when the covers are closed. These covers are designed to sit flush with the finished floor surfaces such as: carpet, tile, wood and terrazzo.*** Available in three (3) aesthetic powder coated finishes: black (BK), gray (GY), bronze (BZ) and three durable finishes: brushed aluminum (AA), satin brass plated (SB) and satin nickel plated (SN).



Tile Shim - Used for floor coverings greater than 3/16" (4.8mm). The 8TS will allow the top surface of the cover to be flush with the finished floor. Includes: six (6) 1/16" (1.6mm) thick shims. Up to a total of 3/8" (9.5mm) of adjustment.

8FFKIT-BK 8FFKIT-AA



Replacement Screw Plugs -

Replacement screw plug kit contains one 1" and two (2) 1-1/4" trade size screw plugs. Available in black (BK) and brushed aluminum (AA).


^{***} Requires 8CT-CTR terrazzo ring to be installed first.

Evolution Series Heavy Duty 8" Round Cover Assemblies Ordering Information

Catalog No./Item


Description/Specifications

8CTCHDSS




Stainless Steel Surface Style Cover Assembly – High load cover designed to attach to the 8STC and 8STCP Poke-Thru Stem Assemblies, as well as RFBA6C, RFBA10C and CRFB4 floor boxes.

- Cover is made from stainless steel.
- Equipped with a dampened self-closing hinge.
- 8° beveled edge meets ADA guidelines and reduces tripping hazards.
- Designed to sit on top of finished floor surfaces such as: carpet, tile, wood, polished concrete and terrazzo.



Catalog No./Item


8CTHDSS



Description/Specifications

Stainless Steel Flush Style Cover Assembly – High load cover designed to attach to the 8STC and 8STCP Poke-Thru Stem Assemblies, as well as RFBA6C, RFBA10C and CRFB4 floor boxes.

- Cover is made from stainless steel.
- Equipped with a dampened self-closing hinge.
- Designed to sit flush with finished floor coverings such as: carpet, tile, wood and terrazzo. (Terrazzo requires use of the 8CT-CTR Terrazzo Ring.)



8CT-CTR



8" Terrazzo Ring -

 Nonmetallic ring for use on terrazzo floor applications with Evolution and Heavy Duty Flush Style Covers.

Evolution Series 8" Poke-Thru Devices Center Mount Device Plates Ordering Information

Catalog No./Item

Description/Specifications

Catalog No./Item

Description/Specifications

8B



Device Mounting Plate - Singlegang device plate used to blank off any one (1) of the center compartments, when no devices are used.

8S2



Device Plate - Receptacle opening 1 9/16" (40mm). For 8" poke-thru units only.

8DP



Device Mounting Plate - Singlegang device plate that accepts standard 15A or 20A duplex receptacle, a duplex Turnlok receptacle, fits in any one (1) of the center compartments. Devices supplied by others.

8TRAC




Device Mounting Plate - Singlegang device plate that will accept up to six (6) Ortronics TracJack devices. Fits in any one (1) of the center compartments. Devices supplied by others.

8DEC



Device Mounting Plate - Singlegang device plate that will accept Decorator style devices such as 20A receptacles, GFCls, 106 adapters or A/V devices. Fits in any one (1) of the center compartments. Devices supplied by others.

8SER



Device Mounting Plate - Singlegang device plate that will accept up to three (3) Ortronics Series II dual modular inserts. Fits in any one (1) of the center compartments. Devices supplied by others.


8ACT6A



Device Mounting Plate -

Single-gang device plate that will accept up to six (6) ports of communication devices. Fits in any one (1) of the center compartments. Devices supplied by others.

8MAAP



Device Mounting Plate - Singlegang device plate that will accept up to four (4) Legrand AVIP or Extron® Electronics MAAP style plates. Fits in any one (1) of the center compartments. Devices supplied by others.


8MOS



Mosaic Device Plate - Device plate accepts three (3) standard Mosaic devices (45mm x 22.5mm). Devices supplied by others.

NOTE: Not designed to accept adorne style devices.

8AAP




Device Mounting Plate - Twogang device plate that will accept up to four (4) Extron® Electronics AAP style plates. 8AAP takes up 2 of the 3 gangs in the center compartment. Devices supplied by others.

8CREST



Two-Gang Plate – Device plate accepts most A/V manufacturer's double-gang decorator style devices. Takes up two of the center locations.


8CREST3G



Three-Gang Device Plate -


Accepts a three-gang device including Crestron Digital Media devices.

8S1



Device Plate - Receptacle opening 1 3/8" (35mm). For 8" poke-thru units only.


810DJ4LB



Device Mounting Plate -

Accepts 4 data jacks and includes a removable label holder and labels. For use in the center compartment only. 8AT Center Mount Device Plate Mounting Locations

Mounting plates on this page can be installed in the shaded location indicated in this illustration.




Evolution Series 8" Poke-Thru Devices Side Mount Device Plates Ordering Information

Catalog No./Item

Description/Specifications


Description/Specifications

68REC



20A Duplex Receptacles - Two (2) proprietary Tamper-Resistant 20A duplex power receptacles with mounting plates. Designed to fit into the 6", 8" and 10" Poke-Thru Devices. Receptacle can be wired as a standard or isolated ground device.


68B



Catalog No./Item


Device Mounting Plate - Blank plate. Used to blank off either of the side compartments when no devices or cabling are to be used.

68REC-25




20A Duplex Receptacles - Two (2) proprietary 20A tamper-resistant duplex power receptacles with mounting plates and 25' leads. Designed to fit into the 6", 8" and 10" Poke-Thru Devices. Receptacle can be wired as a standard or isolated ground device.

68MAAP



Device Mounting Plate - Device plate that will accept up to two (2) Legrand AVIP or Extron* Electronics MAAP device plates. For use in either of the two side compartments only. Not for use in the center compartment. Extron Devices supplied by others.

68REC-CTRL*



Controlled Receptacle - One (1) 20A proprietary tamper-resistant duplex receptacle marked with a permanent controlled receptacle marking .


682A



Device Mounting Plate - Device plate that will accept up to two (2) ports of communication devices. For use in either of the two side compartments only. Not for use in the center compartment. Communication devices supplied by others.

8AT Side Mount Device Plates Mounting Locations

Device Plates in this section can be installed in the shaded locations indicated in this illustration.



Evolution™ Series 8" Poke-Thru Devices

Evolution Series 8" Bottom Feed Side Mount Device Plates Ordering Information

Catalog No./Item

Description/Specifications

Catalog No./Item

Description/Specifications

5PTHA



Bottom Housing Assembly -

Half-gang pass through housing assembly. Designed to allow pass through of communication cables when no conduit is required. For use in 6" and 8" poke-thru devices.

Note: Not for use with 8ATCFF.

575CHA



Bottom Housing Assembly -

Half-gang 3/4" trade size conduit housing assembly. Includes junction box attached to 3/4" trade size conduit for electrical power connections. For use in 6" and 8" poke-thru devices.

Note: Not for use with 8ATCFF.

5BLH




Bottom Housing Assembly -

Half-gang blank housing assembly. Designed to blank off compartment when no cable pass through is required. For use on side compartments only. For use in 6" and 8" poke-thru devices. Includes tunnels for 6" and 8" poke-thru devices.

Note: Not for use with 8ATCFF.

8AT Bottom Feed Side Mount Device Plate Mounting Locations

Device Plates in this section can be installed in the shaded locations indicated in this illustration.





Evolution Series 8" Bottom Feed Center Mount Device Plates Ordering Information

Catalog No./Item

Description/Specifications

Description/Specifications

Bottom Housing Assembly -

conduit housing assembly. Use on

8STC Series Devices. Covers two

same service. For use in the center

available center compartments.

Both compartments will be the

compartments of 8" poke-thru

NOTE: Designed to work on 8AT


Bottom Housing Assembly -

and 8STC units only.

Not for use with 8ATCFF.

Two-gang 11/2" trade size

175CHA




Bottom Housing Assembly -

One-gang 3/4" trade size conduit housing assembly. Includes junction box attached to 3/4" trade size conduit for electrical power connections. For use in the center compartments of 6", 8" and 10" poke-thru devices.


NOTE: When using on a 6ATCFF Furniture Feed unit, 1BHA (sold separately) is required. Not for use with 8ATCFF.

Bottom Housing Assembly -



One-gang 11/4" trade size conduit housing assembly. For use in the center compartments of 6", 8" and 10" poke-thru devices.


NOTE: When using on a 6ATCFF Furniture Feed unit, 1BHA (sold separately) is required. Not for use with 8ATCFF.



Catalog No./Item

1150CHA

1BLH




devices.

NOTE: When using on a 6ATCFF Furniture Feed unit, 1BHA (sold separately) is required. Not for use with 8ATCFF.

1PTHA

1125CHA



Bottom Housing Assembly -

One-gang pass through housing assembly. Designed to allow pass through of communication cables when no conduit is required. For use in the center compartments of 6", 8" and 10" poke-thru devices.

NOTE: When using on a 6ATCFF Furniture Feed unit, 1BHA (sold separately) is required. Not for use with 8ATCFF.

22CHA



Bottom Housing Assembly - Twogang 2" trade size conduit housing assembly. Used on 8AT and 8STC Series devices, Covers two (2) of the center compartment. Both compartments will be the same service.

NOTE: Designed to work on 8AT and 8STC units only. Not for use with 8ATCFF.

175CHA-LJB



Bottom Housing Assembly -

One-gang 3/4" trade size conduit housing assembly. For use in the center compartments of 6", 8" and 10" poke-thru devices.


NOTE: When using on a 6ATCFF Furniture Feed unit, 1BHA (sold separately) is required. Not for use with 8ATCFF.

8DIV



8" (203mm) Divider - Center compartment divider. Separates services when required maintaining signal strength and product listing.

1100CHA





Bottom Housing Assembly -

One-gang 1" trade size conduit housing assembly. For use in the center compartments of 6", 8" and 10" poke-thru devices.

NOTE: When using on a 6ATCFF Furniture Feed unit, 1BHA (sold separately) is required. Not for use with 8ATCFF.

8AT Bottom Feed Center Mount Device **Plate Location**







Evolution™ Series 8" Poke-Thru Devices

NOTE: All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.



Legrand, North America 60 Woodlawn Street West Hartford, CT 06110 1-877-295-3472 www.legrand.us

Canada

1-844-977-3783 www.legrand.ca

