



PASS & SEYMOUR®

Tamper-Resistant Receptacles PlugTail™ Devices Spec Grade 15 & 20A, 125V



PTTR5262BK

PTTR5262SC

PlugTail™. The fastest, most consistent and reliable wiring devices – ever.

PTTR5262, PTTR5362, PTTR26262, PTTR26362, PTTR5262SC, PTTR5362SC, PTTR26262SC, PTTR26362SC

Factory-terminated devices and connectors mean that device installation is the same regardless of skill level of the installer. The UL-Listed connectors are keyed to ensure proper wiring installation into each receptacle. The connector simply snaps into the back of the device – no fussing with wires, stripping, or tightening screws. PlugTail devices are finger safe with no exposed terminals, so taping is not required. Now device installation is a snap!

A sturdy mechanical shutter system helps prevent children from sticking objects into the receptacle. The toughest and safest tamper-resistant receptacle available. They are offered in both duplex and Decorator style, in addition to split circuit versions.

Features & Benefits


Auto-ground clip assures positive ground.

.036 inch thick, brass, triple-wipe power contacts for lasting retention.

Dual mechanical shutter system to help prevent insertion of foreign objects.

Plated steel wrap strap design for maximum durability and corrosion resistance.

Split circuit versions are pre-wired with one welded pre-stripped wire lead to facilitate switched receptacle circuit applications.

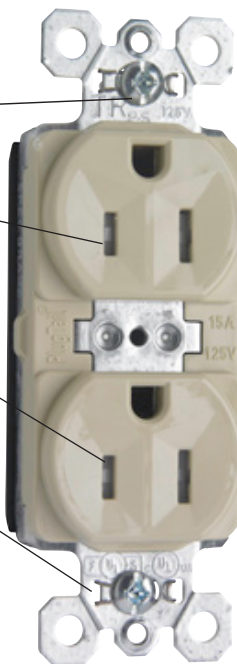

PTTR5362I


High performance copper alloy contacts snugly terminate on device blade. Audible snapping latch assures connection, allows release.

Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.

No exposed terminals create a finger safe application before, during, and after installation.

Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.

Pre-stripped connector leads fasten to conductors, easier than standard pigtails.

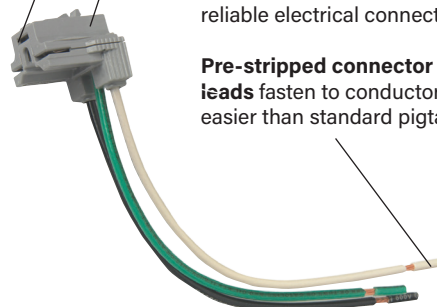

3rd Party Compliance





cULus Listed, File Number E140596, Standard UL498.
Federal Specification WC596.
Conforms to NEMA WD-1 and WD-6.

Technical Information

Performance	
Electrical	
Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current (receptacle only)
Temperature Rise	Maximum 30° C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current
Mechanical	
PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only
Product Identification	Ratings are a permanent part of the device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C (without impact)
Materials	
Face	Nylon
Back Body	PVC
Line Contacts	.036 688 Brass
Integral Ground System	.036 260 Brass
Mounting Strap	.042 Zinc-Plated Steel
Assembly Drive Screw	Zinc-Plated Steel
Tamper Shutter	Thermoplastic
Auto-Ground Clip	Steel
Mounting Screws	Tri-Drive Steel

Warranty
1 Year

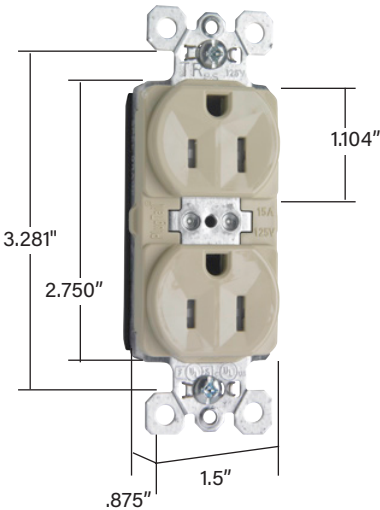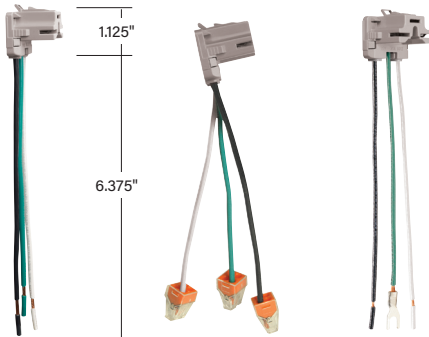

**Dimensions for
15 & 20 Amp
PTTR5362I**



PTTR26262SCW



PTTR5262SC

Ordering Information

Duplex Receptacles

Catalog Number	Ratings		Color	NEMA Config. No.
	A.	V.		
PTTR5262I	15	125	Ivory	5-15R
PTTR5262W	15	125	White	5-15R
PTTR5262	15	125	Brown	5-15R
PTTR5262BK	15	125	Black	5-15R
PTTR5262LA	15	125	Light Almond	5-15R
PTTR5362I	20	125	Ivory	5-20R
PTTR5362W	20	125	White	5-20R
PTTR5362	20	125	Brown	5-20R
PTTR5362BK	20	125	Black	5-20R
PTTR5362LA	20	125	Light Almond	5-20R

Split Circuit Duplex Receptacles with 6" Lead

Catalog Number	Ratings		Color	NEMA Config. No.
	A.	V.		
PTTR5262I	15	125	Ivory	5-15R
PTTR5262SCW	15	125	White	5-15R
PTTR5262SC	15	125	Brown	5-15R
PTTR5262SCBK	15	125	Black	5-15R
PTTR5262SCLA	15	125	Light Almond	5-15R
PTTR5362SCI	20	125	Ivory	5-20R
PTTR5362SCW	20	125	White	5-20R
PTTR5362SC	20	125	Brown	5-20R
PTTR5362SCBK	20	125	Black	5-20R
PTTR5362SCLA	20	125	Light Almond	5-20R



NEMA
5-15R



NEMA
5-20R

Decorator Receptacles

Catalog Number	Ratings		Color	NEMA Config. No.
	A.	V.		
PTTR26262I	15	125	Ivory	5-15R
PTTR26262W	15	125	White	5-15R
PTTR26262	15	125	Brown	5-15R
PTTR26262BK	15	125	Black	5-15R
PTTR26262LA	15	125	Light Almond	5-15R
PTTR26262OR	15	125	Orange	5-15R
PTTR26262RED	15	125	Red	5-15R
PTTR26362I	20	125	Ivory	5-20R
PTTR26362W	20	125	White	5-20R
PTTR26362	20	125	Brown	5-20R
PTTR26362BK	20	125	Black	5-20R
PTTR26362LA	20	125	Light Almond	5-20R
PTTR26362RED	20	125	Red	5-20R

Split Circuit Decorator Receptacles with 6" Lead

Catalog Number	Ratings		Color	NEMA Config. No.
	A.	V.		
PTTR26262SCI	15	125	Ivory	5-15R
PTTR26262SCW	15	125	White	5-15R
PTTR26262SC	15	125	Brown	5-15R
PTTR26262SCBK	15	125	Black	5-15R
PTTR26262SCLA	15	125	Light Almond	5-15R
PTTR26362SCI	20	125	Ivory	5-20R
PTTR26362SCW	20	125	White	5-20R
PTTR26362SC	20	125	Brown	5-20R
PTTR26362SCBK	20	125	Black	5-20R
PTTR26362SCLA	20	125	Light Almond	5-20R
PTTR26362BL	20	125	Blue	5-20R



PASS & SEYMOUR®
Tamper-Resistant Receptacles PlugTail™ Devices
Spec Grade 15 & 20A, 125V

Vertical Markets

- | | | |
|-----------------|------------------------|-------------|
| ▪ Office/Retail | ▪ Institutional | ▪ MDU |
| ▪ Entertainment | ▪ Hospitality/ Lodging | ▪ Education |

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.



Legrand, North America
60 Woodlawn Street
West Hartford, CT 06110
877-295-3472
www.legrand.us

Canada
844-977-3783
www.legrand.ca

FOLLOW US

