



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	DIM A TARGET (OD) TOL. ±0.008 [±0.20]	DIM B MINIMUM (ID)	DIM C LENGTH (ft)	WALL THICKNESS	QUANTIY FEET PER BOX TOL. +/-3%
CLT75PUV-0	0.984 [25.00]	0.803 [20.40]	4000 ft	0.018-0.024 [0.45-0.61]	4,000 (1,219m)
CLT100PUV-0	1.358 [34.49]	1.134 [28.80]	2100 ft	0.020-0.026 [0.50-0.66]	2,100 (640m)
CLT150PUV-0	1.673 [42.49]	1.409 [35.79]	1340 ft	0.020-0.027 [0.52-0.68]	1,340 (408m)
CLT188PUV-0	2.146 [54.51]	1.882 [47.80]	820 ft	0.021-0.028 [0.54-0.70]	820 (250m)

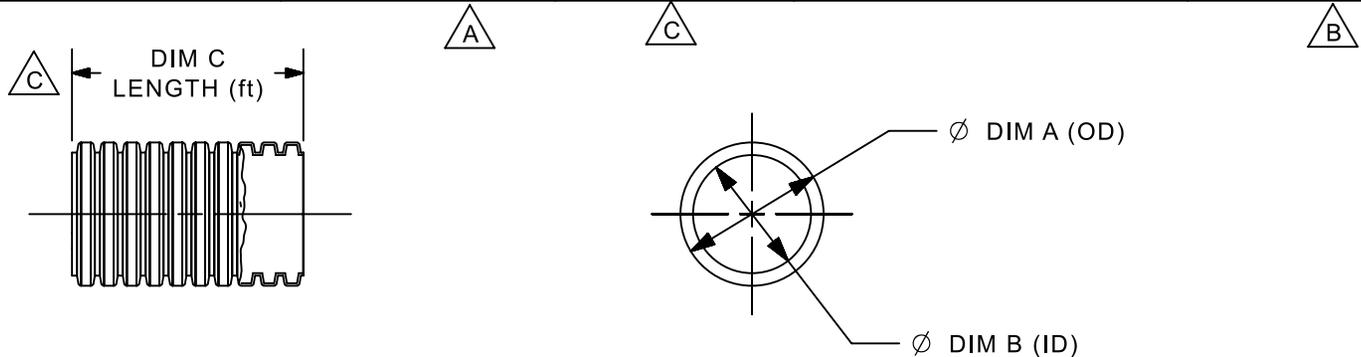

NOTES:

- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A LIST OF CURRENT PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
- DIMENSIONS IN [] ARE METRIC.
- ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS (EUROPEAN DIRECTIVE 2011/65/EU ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.
- ALL PART NUMBERS HAVE ONE CONTINUOUS SLIT ALONG THE ENTIRE LENGTH OF TUBING.
- PRODUCT MAY CONTAIN UP TO 1 SPLICE PER ROLL.
- PRODUCT TESTED TO UL 94 HB FLAME TEST STANDARD.

PART NUMBER		SEE TABLE							
TITLE		UV RESISTANT CORRUGATED LOOM TUBING							
CUSTOMER DRAWING									
ITEM REVISION NAME	12B061BM/02								
DATASET FILE NAME	12B061BM_DC/02A								
 THIRD ANGLE PROJECTION									
MATERIAL	POLYPROPYLENE	DRAWING NUMBER	12B061BM-DC						
DRAWN BY	DATE	CHK	SCALE						
JBN	02/10/22	DAEI	NONE						
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	SHEET 1 OF 1	SIZE	A

A-SIZE CUSTOMER