

NEW!
More on
reverse

CableAble® Cable & Conduit Support Bracket

Multiple Mounting Options • Load Rated • Versatile Use • Plenum Rated*




(2) **CA8L** on unistrut,
power conduits
& cables

for Power or Low Voltage **CABLE or CONDUIT**
COMMERCIAL or RESIDENTIAL
PLENUM* or NON-PLENUM CEILINGS


(2) **CA8**
on wood studs,
power & low
voltage cables



CA8L on unistrut,
power or low voltage conduits

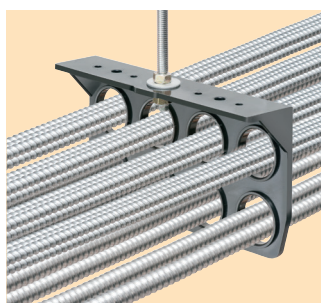


CA8L on threaded rod,
power (MC) cables

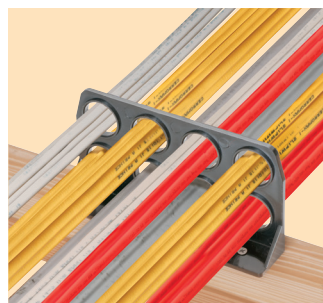


CA8 on wood joist
power (NM) cables



CA8L on unistrut,
power cables

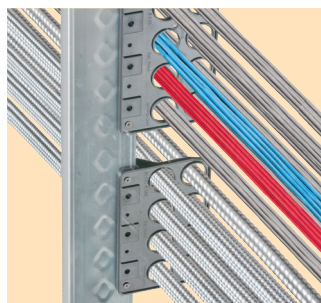


(2) **CA8L** on steel stud
power & low voltage cables

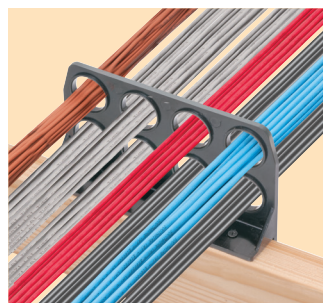

CA8 on wood stud
low voltage cables


CableAble® Multiple Mounting Options
for Multiple Cable Types and EMT and Flexible Metal Conduit

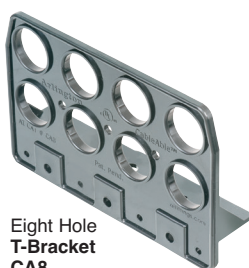

Eight Hole
T-Bracket
CA8



Eight Hole
L-Bracket
CA8L



Four Hole
T-Bracket
CA4

1-1/4"



Four Hole
L-Bracket
CA4L

Perfect for commercial or residential applications, Arlington's time-saving non-metallic **CableAble® Support Brackets** are the **ONE BRACKET** designed for horizontal runs of cable or conduit, commercial or residential applications, power or low voltage wiring, and plenum* or non-plenum ceilings.

Multiple mounting options

Versatile Four- and Eight-Hole Support Brackets mount horizontally or vertically to wood or steel studs, and unistrut – and horizontally to all thread and beam clamps. They offer secure support for EMT or flexible metal conduit, power MC and NM cables, and low voltage cables.

Load-Rated Refer to Load Rating Table for max load ratings for various mounting options

* Suitable for use in Environmental Air Handling Spaces per NEC 300.22 (c)

Category	Type	Max Spacing
CABLE Power (PWR)	NM Cable	4.5'
	SE Cable	4.5'
	AC Cable	4.5'
	MC Cable	6'
CABLE Low Voltage (LV)	Data Cable	3.0' – 5.0'
	Fire Alarm	3.0' – 5.0'
	CATV	3.0' – 5.0'
	Security	3.0' – 5.0'
	Sound	3.0' – 5.0'
	Control	3.0' – 5.0'
CONDUIT PWR & LV	EMT	10'
	FMC	4.5'



Patent
pending



Arlington®

1 Stauffer Industrial Park
Scranton, PA 18517

800/233.4717 • Fax 570/562.0646

www.aifittings.com

CableAble® Cable & Conduit Support Bracket


For Commercial, Residential Work • Power or Low Voltage Cable or Conduit

CableAble® Mounting Options



CA4, CA4L, CA8, CA8L Weight Ratings				
Mounting Surface	Mounting Style	Hardware	Screw/Bolt Location	Rating
Wood Stud/Joist	Vertical or Horizontal	#6 Drywall Screws	2 Screws Outer	115
			4 Screws	150
		#8 Pan Head Screws	2 Screws Outer	115
			4 Screws	200
Steel Stud 25 ga	Vertical or Horizontal	#6 Fine Thread Drywall	4 Screws	50
Threaded Rod 3/8"	Horizontal	Washer & Hex Nut Top & Bottom	3/8" Dia. Center Hole	90
Unistrut (CA8L & CA4L)	Horizontal or Vertical	(2) 1/4-20 Bolts with Washers	(2) Strut Nuts	135
Beam Clamp (CA8 & CA4)	Horizontal	1/4-20 Bolt with 5/8" OD Washers	Beam Clamp, Center Hole	150

- (3) Holes for up to 3/8" Bolt or Threaded Rod
- (3) Holes for 1/4" Bolt for Beam Clamp
- (8) Holes for #6 or #8 screws

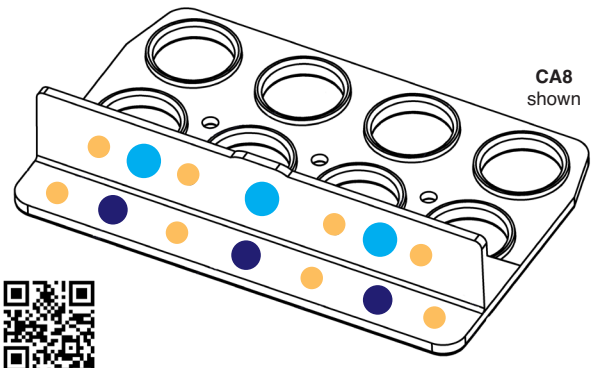

See installation instructions for more information

Catalog Number	UPC/DEI/NAED Mfg. #018997	Description Support Bracket	Mounting Style	Unit Pkg	Std Pkg
CA8	99341	Eight 1-1/4" Holes	T Bracket	4	20
CA8X	99359	Eight 1-1/4" Holes, Bulk Pack	T Bracket	50	50
CA8L	99342	Eight 1-1/4" Holes	L Bracket	4	20
CA8LX	99360	Eight 1-1/4" Holes, Bulk Pack	L Bracket	50	50
CA4	99371	Four 1-1/4" Holes	T Bracket	4	20
CA4L	99372	Four 1-1/4" Holes	L Bracket	4	20
CA4X	99374	Four 1-1/4" Holes, Bulk Pack	T Bracket	50	50
CA4LX	99375	Four 1-1/4" Holes, Bulk Pack	L Bracket	50	50



Distributed by

CableAble 0525/25M

Patent pending