

B

A


B-SIZE CUSTOMER

PANDUIT PART #	WIRE RANGE		COLOR (DIN)	WIRE STRIP LENGTH +1/32 -0 [+0,8 -0]	WIRE CLASS	DIMENSIONS in. [mm]				MAX WIRE INSUL DIA	INSTALLATION TOOLS/DIES	
	AWG	[mm²]				L	P	ID	OD (REF.)		MANUAL	PNEUMATIC
* FSDX75-8	22-20	[0,50]	WHITE	15/32 [11,91]	B, C, G, H, I, K, M	0.57 [14,5]	0.31 [8,0]	0.04 [1,1]	0.05 [1,4]	0.11 [2,9]	CT-1002 CT-1003 CT-1090 ^CD-090 CT-1123 CT-1160 CT-1170 CT-1200 CT-1200E CT-1201 #CT-2523CH	CTFP-25 CTFP-40
FSDX76-8	18	[0,75]	GRAY	15/32 [11,9]	B, C, G, H, I, K, M	0.57 [14,5]	0.31 [8,0]	0.05 [1,3]	0.06 [1,6]	0.14 [3,4]		
FSDX77-8	18	[1,0]	RED	15/32 [11,9]	B, C, G, H, I, K, M	0.55 [14,0]	0.31 [8,0]	0.06 [1,45]	0.07 [1,75]	0.14 [3,4]		
FSDX78-8	16	[1,5]	BLACK	15/32 [11,9]	B, C, G, H, I, K, M	0.55 [14,0]	0.31 [8,0]	0.07 [1,75]	0.08 [2,03]	0.15 [3,8]		
FSDX78-10				17/32 [13,5]	B, C, G, H, I, K, M	0.63 [16,0]	0.39 [10,0]					
FSDX80-8	14	[2.5]	BLUE	15/32 [11,9]	B, C, G, H, I, K, M	0.63 [16,0]	0.31 [8,0]	0.09 [2.3]	0.10 [2.6]	0.19 [4.9]		
FSDX80-12				5/8 [15,9]	B, C, G, H, I, K, M	0.79 [20,0]	0.47 [12,0]					
FSDX81-10	12	[4.0]	GRAY	17/32 [13,5]	G, H, I, K, M	0.71 [18,0]	0.39 [10,0]	0.11 [2.9]	0.13 [3.3]	0.24 [6.1]		
FSDX81-12				5/8 [15,9]	G, H, I, K, M	0.79 [20,0]	0.47 [12,0]					
FSDX84-12	6	[16,0]	BLUE	5/8 [15,9]	G, H, I, K, M	.91 [23,0]	0.47 [12,0]	0.24 [6,0]	0.25 [6,4]	0.37 [9,3]	+CT-1004 CT-1104 CT-1200E CT-1201 #CT-2504CH	---
FSDX84-16				3/4 [19,1]		1.06 [27,0]	0.63 [16,0]					

* UL LISTED WITH 20 AWG ONLY, UL486F SCOPE IS 20 - 1/0 AWG. WHITE IS DIN COLOR FOR 20 AWG [0,5]
+ TOOL/PART IS NOT A UL LISTED COMBINATION
^ DIES USED WITH CT-2300 TOOL AND UP14ZLW PRESS.
CRIMP HEAD USED WITH CT-2500 TOOL


NOTES:

1. USED FOR:
A. UL LISTED WITH STRANDED COPPER WIRE ONLY
B. 221°F [105°C] MAX. OPERATING TEMPERATURE
2. MATERIAL:
A. STAMPING: COPPER, TIN PLATED
B. HOUSING: POLYPROPYLENE, COLOR CODED
C. COLOR CODE CONFORMS TO DIN 46228 STANDARD
3. SEE www.panduit.com FOR PACKAGE QUANTITIES
4. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

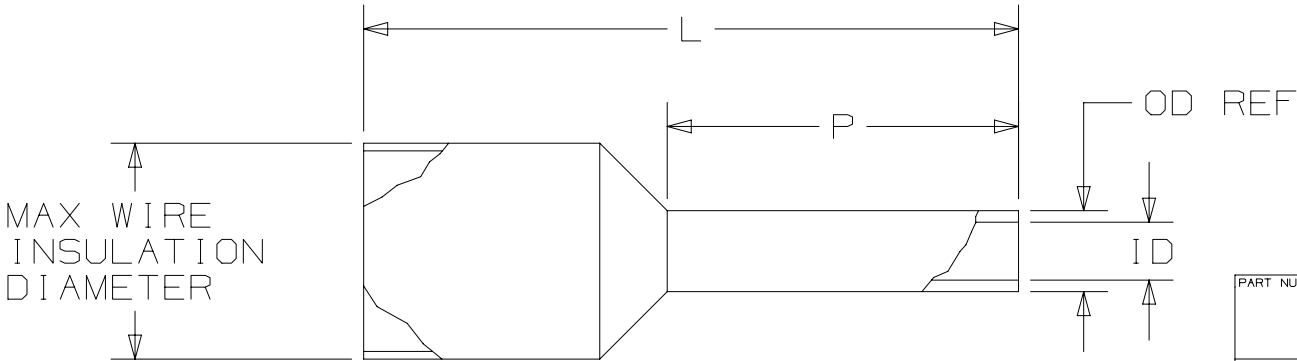

19A	1-29-25	MRWA	BYA	JSUN	B. ADDED 18 AWG WIRE SUPPORT FOR FSD77-8	N41752BA/19
18A	11-5-24	MRWA	BYA	JSUN	A. ADDED FSDX84-16 TO TABLE	N41752BA/18
17A	06-10-24	SAHR	BYA	MRWA	ADDED CT-1200E TOOL	128785/04
16A	02-05-24	SAHR	SAHR	MRWA	ADDED CT-1200 AND CT-1201	128785/02
14A	08-21-23	DPOI	JBN	MRWA ASY	ADDED UL ENHANCED MARK - US, CA.	128785/01
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN



PART NUMBER		SEE TABLE		
TITLE				
FERRULES WITH SLEEVES SINGLE WIRE DIN END SLEEVES FSDX: LARGER SLEEVE DIAMETER				
CUSTOMER DRAWING				
ITEM REVISION NAME				
N41752BA/19				
DATASET FILE NAME				
N41752BA_DC/19A		 THIRD ANGLE PROJECTION		
				
MATERIAL		DRAWING NUMBER		
SEE NOTES		A41752		
DRAWN BY	DATE	CHK	SCALE	SIZE
FCHE	03-31-2018	-	N.T.S	B
SHEET 1 OF 1				