THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR PACKAGE QUANTITIES.
2. DIMENSIONS IN [ ] ARE METRIC.
3. MATERIAL:
   SUBSERVICE POLYCARBONATE, CLEAR OVERCOAT, WITH ADHESIVE

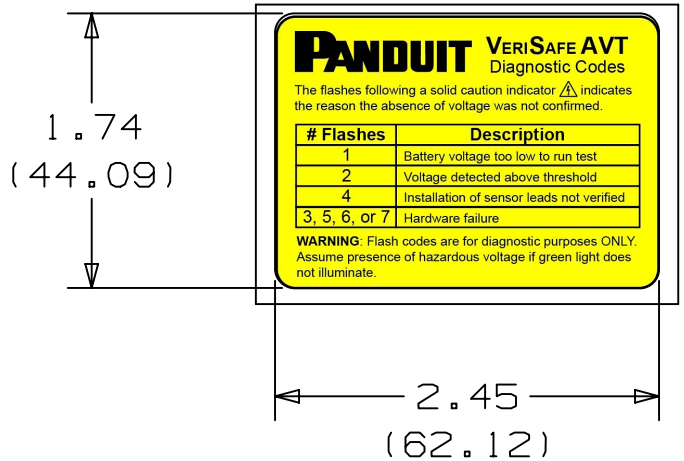

PANDUIT VeriSafe AVT Diagnostic Codes

The flashes following a solid caution indicator ⚠ indicates the reason the absence of voltage was not confirmed.

# Flashes	Description
1	Battery voltage too low to run test
2	Voltage detected above threshold
4	Installation of sensor leads not verified
3, 5, 6, or 7	Hardware failure

WARNING: Flash codes are for diagnostic purposes ONLY. Assume presence of hazardous voltage if green light does not illuminate.

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	01-23-26	BDK	RUMO	SBAS	INITIAL RELEASE	029611 r00

PART NUMBER: VS-AVT-DL

TITLE: VERISAFE DIAGNOSTIC LABEL

CUSTOMER DRAWING

ITEM REVISION NAME: 181216CF/02

DATASET FILE NAME: 181216CF_DC/02A

THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: 181216CF-DC

DRAWN BY	DATE	CHK	SCALE	SHEET	SIZE
BDK	01.23.26	RUMO	NONE	SHEET 1 OF 1	A

A_SIZE_CUSTOMER_LAND